



**Prifysgol Cymru**  
Y Drindod Dewi Sant  
**University of Wales**  
Trinity Saint David

# Design and Implementation of an Automated Oil Transfer Monitoring and Control System Using PLC Technology

By David Mathew Lewis

Supervisor: Dr. Olubenga Olubodun  
Second Marker: Dr. Jenifer Prince Devaraj

Project submitted as part of the requirements for the award of BEng (Hons) Electrical and  
Electronic Engineering

01<sup>st</sup> May, 2026

## **DECLARATION**

I, David Mathew Lewis declare that I am the sole author of this Project; that all references cited have been consulted; that I have conducted all work of which this is a record, and that the finished work lies within the prescribed word limits.

This work has not previously been accepted as part of any other degree submission.

## **FORM OF CONSENT**

I, David Mathew Lewis hereby consent that my Project, submitted in candidature for the Electrical & Electronic Engineering degree, if successful, may be made available for inter-library loan or photocopying (subject to the law of copyright), and that the title and abstract may be made available to outside organisations.

## Abstract

This project presents the design, implementation, and commissioning of an automated oil transfer monitoring and control system developed for SSE at Resolven, Neath. The system addresses the limitations of conventional manual oil transfer operations, which lack real-time monitoring, automated fault detection, and structured sequence control. A Siemens S7-1212C Programmable Logic Controller (PLC) was selected as the primary control platform, programmed in Ladder Diagram (LAD) using a modular Function Block architecture within Siemens TIA Portal v17.

The system serves two bunded oil storage tanks — one for transformer oil (Metcraft A8442, 11,883L usable capacity) and one for RMU oil — providing automated bidirectional oil transfer via a Motek EM80B-4 0.75kW three-phase motor and DOL forward/reverse contactor circuits. IFM Electronic UGT813 ultrasonic level and SU8030 clamp-on ultrasonic flow sensors were selected, communicating via IO-Link (IEC 61131-9) through an IFM AL1100 master module. Instrumentation selection was informed by comparative analysis against equivalent products from Siemens, Endress+Hauser, and Keyence, with IFM instruments offering comparable technical performance at significantly lower cost. A twelve-condition alarm and fault detection system was implemented following ISA-18.2 alarm management principles, incorporating timer-based confirmation delays to prevent nuisance tripping. A Siemens SIMATIC HMI touch panel provides operator control and real-time process visualisation.

Commissioning testing confirmed that all twelve alarm conditions operated correctly with zero false trips, the setpoint-based auto-stop sequence achieved accuracy within 0.3L, and IO-Link sensor diagnostic flags responded within a single PLC scan cycle. The completed system is currently installed and operational at the OCU Resolven site, demonstrating that a cost-effective, modular PLC-based architecture can deliver a professional-grade industrial oil transfer monitoring solution suitable for real-world deployment.

## Table of Contents

|                                                                           |    |
|---------------------------------------------------------------------------|----|
| DECLARATION .....                                                         | 2  |
| FORM OF CONSENT .....                                                     | 2  |
| Abstract.....                                                             | 3  |
| 1. Introduction .....                                                     | 6  |
| 2. Literature Review .....                                                | 7  |
| 3. Methodology .....                                                      | 10 |
| 3.1 System Overview.....                                                  | 10 |
| 3.2 Control System Architecture .....                                     | 10 |
| 3.2.1 Motor Control Layer .....                                           | 10 |
| 3.2.2 Instrumentation and Data Acquisition Layer .....                    | 10 |
| 3.2.3 Alarm and Fault Detection Layer .....                               | 10 |
| 3.3 Requirements Analysis .....                                           | 11 |
| 3.4 Design Process .....                                                  | 11 |
| 3.5 Ethical and Safety Considerations.....                                | 12 |
| 4. Design & Implementation .....                                          | 13 |
| 4.1 System Overview and High-Level Control Flowchart .....                | 13 |
| 4.2 Hardware Selection and Component Design .....                         | 15 |
| 4.2.1 PLC — Siemens S7-1212C.....                                         | 15 |
| 4.2.2 HMI — Siemens SIMATIC HMI .....                                     | 15 |
| 4.2.3 Motor Selection — Motek EM80B-4 .....                               | 15 |
| 4.2.4 Motor Control — DOL Forward/Reverse Circuits.....                   | 15 |
| 4.2.5 IO-Link Master — IFM AL1100.....                                    | 16 |
| 4.2.6 Oil Storage Tanks .....                                             | 16 |
| 4.3 Instrumentation Selection .....                                       | 16 |
| 4.3.1 Level Measurement — IFM UGT813.....                                 | 16 |
| 4.3.2 Flow Measurement — IFM SU8030 .....                                 | 17 |
| 4.3.3 Communication Protocol — IO-Link .....                              | 17 |
| 4.4 Project Materials and Cost Summary.....                               | 18 |
| 4.5 PLC Software Design .....                                             | 19 |
| 4.5.1 DOL Motor Control Function Block (FB — FB_DOL_Motor).....           | 19 |
| 4.5.2 Tank Instrumentation Function Call (FC4 — Tank 1 Instruments) ..... | 20 |
| 4.5.3 Alarm and Fault Detection Function Call (FC — FC_Alarms) .....      | 20 |
| 4.6 HMI Design.....                                                       | 21 |
| 5. Results & Discussion .....                                             | 22 |
| 5.1 Panel Build and Physical Construction .....                           | 22 |
| 5.2 PLC Software Commissioning .....                                      | 26 |
| 5.2.1 Motor Control Testing.....                                          | 28 |
| 5.2.2 Sequence Operation .....                                            | 28 |

|                                                                                                           |    |
|-----------------------------------------------------------------------------------------------------------|----|
| 5.3 Instrumentation Performance.....                                                                      | 28 |
| 5.3.1 Level Measurement.....                                                                              | 28 |
| 5.3.2 Flow Measurement.....                                                                               | 29 |
| 5.4 Alarm System Validation.....                                                                          | 31 |
| 5.5 HMI Performance .....                                                                                 | 33 |
| 5.6 Evaluation Against Project Objectives .....                                                           | 35 |
| 6. Conclusion .....                                                                                       | 38 |
| 7. Reflection.....                                                                                        | 39 |
| References .....                                                                                          | 40 |
| Appendices .....                                                                                          | 42 |
|                                                                                                           |    |
| Figure 1 - Project Gantt chart. ....                                                                      | 12 |
| Figure 3 - High-level control flowchart. ....                                                             | 14 |
| Figure 4 - Exterior view of the completed control panel. ....                                             | 22 |
| Figure 5 - Interior view of the panel showing all components. ....                                        | 23 |
| Figure 6 - Interior view showing rear of HMI and contact blocks.....                                      | 24 |
| Figure 7 - Power supply and circuit/overload protection. ....                                             | 25 |
| Figure 8 - Safety relay, PLC, input/output card and terminals.....                                        | 25 |
| Figure 9 - Main isolator, field wiring terminals and ethernet ports. ....                                 | 26 |
| Figure 10 - IFM AL1100 IO-Link Master. ....                                                               | 27 |
| Figure 11 - TIA Portal showing live tags during commissioning. ....                                       | 29 |
| Figure 12 - IFM UGT813 level sensor installed on the transformer oil storage tank.....                    | 30 |
| Figure 13 - IFM SU8030 clamp-on ultrasonic flow sensor installed on the 1" PVC transfer<br>pipework. .... | 31 |
| Figure 14 - Photo of HMI showing live flow data.....                                                      | 32 |
| Figure 15 - TIA Portal showing alarms during operation.....                                               | 33 |
| Figure 16 - HMI showing active alarms. ....                                                               | 34 |
| Figure 17 - Photo of HMI in normal operation.....                                                         | 35 |
|                                                                                                           |    |
| Table 1 - Motor selection comparison. ....                                                                | 15 |
| Table 2 - Level sensor comparison — selected option (IFM UGT813) highlighted. ....                        | 17 |
| Table 3 - Flow sensor comparison — selected option (IFM SU8030) highlighted. ....                         | 17 |
| Table 4 - Communication protocol comparison — selected option (IO-Link) highlighted. ....                 | 18 |
| Table 5 - Project materials and equipment cost summary. ....                                              | 19 |
| Table 6 - Alarm and fault conditions implemented in FC_Alarms. ....                                       | 20 |
| Table 7 - Functional test results summary.....                                                            | 27 |

## 1. Introduction

Efficient and reliable fluid transfer systems are essential in industrial sectors such as water treatment, oil and gas, and chemical processing. Oil transfer systems are widely used to transport fluids between storage, processing, and distribution stages, where maintaining control over flow, pressure, and volume is critical for safe and efficient operation. However, many conventional systems rely on basic control strategies with limited real-time monitoring, increasing the risk of inefficiencies, undetected faults, and operational failures [1].

Programmable Logic Controllers (PLCs) are widely adopted in industrial automation due to their robustness, reliability, and ability to operate in real-time environments [2]. PLC-based systems provide a structured and scalable approach to process control, enabling precise management of pumps, valves, and sensors within fluid transfer applications [3]. Modern PLC systems can also integrate monitoring and diagnostic functions, allowing operators to respond quickly to abnormal conditions [4].

Despite these capabilities, there remains a need for improved integration of monitoring, control, and fault detection within oil transfer systems. Many existing implementations lack advanced diagnostic features or rely heavily on manual intervention, which can result in delayed fault identification and reduced system efficiency [5]. Additionally, smaller-scale or modular systems often require cost-effective solutions that maintain industrial reliability without excessive complexity.

This project designed and developed an automated oil transfer monitoring and control system using PLC technology for SSE at OCU Resolven, Neath. The system serves two oil storage tanks — one for transformer oil and one for RMU oil — with a single pump providing bidirectional oil transfer between the storage tanks and the associated equipment. The system incorporates IFM IO-Link flow and level sensors to enable real-time monitoring of system conditions [6]. Control logic implemented within the Siemens S7-1212C PLC regulates pump operation, ensures safe transfer of fluid, and responds to system changes dynamically [7]. The system also includes comprehensive fault detection mechanisms to identify abnormal conditions such as sensor failures, incorrect flow direction, or pump faults [8].

The primary aim was to develop a reliable and efficient PLC-based control system that enhances the performance and safety of oil transfer operations. This was achieved by analysing existing systems, designing and implementing a fully commissioned industrial control panel, and evaluating its performance under operational conditions. The system incorporates structured PLC programming techniques including function blocks for motor control, alarm handling, and instrumentation processing, to ensure modularity, scalability, and reliability [9].

## 2. Literature Review

Fluid transfer systems are fundamental components in industrial processes, particularly within the oil and gas, water treatment, and chemical industries. These systems are responsible for the controlled movement of fluids between storage, processing, and distribution units. Traditionally, oil transfer systems have relied on manual operation or basic control strategies, which often lack real-time monitoring and fault detection capabilities, leading to inefficiencies and increased risk of system failure [10].

With the advancement of industrial automation, Programmable Logic Controllers (PLCs) have become the dominant technology for process control in fluid transfer applications. PLC-based systems provide high reliability, deterministic control, and the ability to operate in harsh industrial environments. According to Bolton [1], PLCs are widely used in industrial automation due to their robustness and flexibility in controlling sequential and continuous processes. Their ability to interface with sensors and actuators makes them particularly suitable for oil transfer systems where parameters such as flow rate, pressure, and tank level must be continuously monitored and controlled.

Several studies have explored the implementation of PLC-based control systems in fluid handling applications. Khandare et al. [11] developed an automated liquid level control system using PLC and SCADA, demonstrating improved system efficiency and reduced manual intervention. Similarly, Patil and Patil [12] designed a PLC-controlled pumping system for industrial fluid transfer, highlighting the benefits of automation in reducing operational errors and enhancing system reliability. Petrescu et al. [13] further demonstrated the effectiveness of PLC-based automation in pipeline control, showing significant improvements in operational safety and efficiency over manual systems.

In addition to control, monitoring plays a critical role in ensuring system safety and performance. Supervisory Control and Data Acquisition (SCADA) systems are often integrated with PLCs to provide real-time visualisation and data logging [14]. As discussed by Boyer [15], SCADA systems enable operators to monitor system variables, detect anomalies, and make informed decisions. However, the implementation of SCADA can introduce additional cost and complexity, which may not be suitable for smaller-scale or modular systems. The Human-Machine Interface (HMI) provides a more compact alternative for operator interaction in smaller systems, as discussed by Proctor et al. [16].

Ultrasonic measurement technology has been widely studied for both level and flow measurement in industrial applications. Wang et al. [17] presented a comprehensive review of ultrasonic level measurement methods, identifying non-contact ultrasonic sensing as particularly suitable for hazardous liquids due to the absence of wetted parts. For flow measurement, Baker [18] demonstrated that clamp-on ultrasonic flow sensors provide accurate, non-invasive measurement suitable for a wide range of fluid types including oils, without requiring process shutdown for installation. These findings directly support the instrumentation approach adopted in this project.

Recent research has focused on enhancing fluid transfer systems through the integration of sensor networks and intelligent monitoring techniques. Sharma et al. [19] proposed a sensor-based monitoring system for pipeline leakage detection, demonstrating improved fault detection capabilities. Similarly, research by Ahmed et al. [20] investigated pressure and flow-based fault detection methods, showing that combining multiple sensor inputs can significantly improve system reliability. The ISA-18.2 standard [21] provides widely adopted guidance on industrial alarm management, recommending timer-based confirmation and rationalisation of alarm conditions to minimise nuisance tripping — an approach directly implemented in the FC\_Alarms function call of this project.

The emergence of IO-Link as a standardised point-to-point digital communication protocol (IEC 61131-9 [22]) has significantly advanced the capability of field-level instrumentation. Heynicke et al. [23] demonstrated the advantages of IO-Link in factory automation, highlighting its ability to transmit multiple process variables, device parameters, and diagnostic data over a simple 3-wire cable. Vitturi et al. [24] further examined industrial communication systems, noting that digital sensor protocols such as IO-Link provide substantially richer diagnostic information than conventional analogue signals, improving system maintainability. These advantages are consistent with the performance observed during commissioning of the system described in this report.

Motor efficiency and selection criteria for industrial pump applications have been extensively studied. Almeida et al. [25] reviewed the impact of motor efficiency classes on industrial energy consumption, noting that while IE3 premium efficiency motors offer improved efficiency, IE1 motors remain appropriate for intermittent duty applications where running hours are low. This finding supports the selection of the Motek EM80B-4 IE1 motor for this batch-duty oil transfer application. Hughes and Drury [26] provide comprehensive guidance on three-phase induction motor selection and DOL starting characteristics applicable to this project.

Despite these advancements, a number of limitations remain in existing oil transfer and fluid control systems. Many studies focus primarily on either control or monitoring, rather than integrating both into a unified system [27]. While advanced monitoring techniques such as IoT-based systems have been proposed [27], these solutions often require complex infrastructure and may not be practical for industrial environments where reliability and simplicity are critical [28]. Furthermore, there is limited research on the development of compact, cost-effective PLC-based systems that incorporate both automated control and fault detection within a single platform, highlighting a gap that this project addresses.

A critical comparison of the approaches identified in the literature reveals several important distinctions relevant to this project. The PLC-based systems described by Khandare et al. [11] and Patil and Patil [12] both rely on conventional 4–20 mA analogue instrumentation, which provides only a single process variable per sensor with no diagnostic capability. While these systems demonstrate the viability of PLC-based fluid control, they do not address the challenge of sensor health monitoring — a limitation that became apparent in the fault conditions identified by Ahmed et al. [20]. The approach adopted in this project, using IO-Link digital communication [22], directly addresses this limitation by providing real-time sensor diagnostic flags alongside process data, without requiring additional hardware.

The alarm management approaches described in the literature also vary considerably in rigour. Several studies, including Sharma et al. [19], implement simple threshold-based alarms without any confirmation delay or rationalisation process. This approach risks nuisance tripping in industrial environments where transient process variations are common. The ISA-18.2 standard [21] explicitly identifies this as a significant cause of operator alarm fatigue and recommends timer-based confirmation as a minimum requirement. This project's implementation of TP timer confirmation delays for all transient alarm conditions represents a more robust approach than that described in many comparable academic studies.

It is also worth noting that the majority of PLC-based fluid control studies identified in the literature are laboratory-based implementations or simulations, rather than live industrial installations. This limits their external validity — results obtained in controlled laboratory conditions may not reflect the challenges of real-world commissioning, including electrical noise, mechanical variability, and the constraints of working within an operational industrial site. The system described in this report was designed, built, and commissioned as a live industrial installation for SSE at Resolven, providing a higher degree of practical validity than laboratory-based alternatives.

This project addressed this gap by designing and implementing a PLC-based oil transfer monitoring and control system that integrates real-time sensing, automated control, and fault detection within a single, scalable solution. By focusing on a practical and implementable design for a real industrial installation, this research contributes to the development of efficient and reliable fluid transfer systems suitable for industrial applications.

## 3. Methodology

### 3.1 System Overview

The methodology adopted for this project follows a system design and development approach, focusing on the implementation of a PLC-based oil transfer system with integrated monitoring and fault detection capabilities. The system was designed and delivered as a real industrial installation for SSE at Resolven, Neath, incorporating real-time control, sensor feedback, and safety mechanisms consistent with industrial best practice [3].

The overall system consists of the following key components:

- Two bunded oil storage tanks — one for transformer oil (Metcraft A8442, 11,883L usable) and one for RMU oil
- A centrifugal pump driven by a Motek EM80B-4 0.75kW three-phase motor, controlled via DOL forward/reverse circuits
- A Programmable Logic Controller (PLC) — Siemens S7-1212C — for system control and automation [7]
- IFM IO-Link instruments for real-time flow and level monitoring [6]
- Comprehensive alarm and fault detection logic based on ISA-18.2 principles [21]
- A Siemens SIMATIC HMI touch panel for operator interaction [16]

### 3.2 Control System Architecture

A modular programming approach has been adopted using Function Blocks (FBs) and Function Calls (FCs) within Siemens TIA Portal v17. This approach improves code reusability, readability, and maintainability, as recommended by Stenerson [9] and Groover [29]. The control system is divided into three primary layers:

#### 3.2.1 Motor Control Layer

The motor control logic is implemented using a dedicated Function Block for Direct-On-Line (DOL) motor operation, managing forward and reverse operation, start/stop sequencing, interlocks, and fault detection. The use of a reusable function block ensures consistency in control logic and enables scalability for multiple pump systems [3].

#### 3.2.2 Instrumentation and Data Acquisition Layer

Instrumentation is implemented using IO-Link-compatible IFM sensors [6], allowing for real-time acquisition of process data including level, flow rate, direction, and device health status. Sensor data is processed and scaled within the PLC to provide meaningful engineering values such as litres and L/min [23].

#### 3.2.3 Alarm and Fault Detection Layer

A comprehensive alarm system is implemented following ISA-18.2 [21] alarm management principles. Timer-based confirmation delays prevent nuisance tripping, while IO-Link

diagnostic flags provide immediate sensor health monitoring without additional hardware [24].

### 3.3 Requirements Analysis

Prior to commencing the design of the control system, a requirements analysis was carried out to identify the functional and non-functional requirements of the system. Functional requirements were derived from discussions with the client (SSE) and OCU Hornbill's project engineering team, and included the need for bidirectional oil transfer between storage tanks and associated transformer and RMU equipment, automated sequence control with operator-defined volume setpoints, real-time monitoring of flow rate and tank level, and a comprehensive fault detection and alarm system to protect equipment and personnel.

Non-functional requirements included the need for the system to conform to industrial standards for panel construction and electrical installation, compatibility with the site's existing Siemens automation infrastructure, cost-effectiveness in instrumentation selection, and ease of operator use through a clear HMI interface. The requirement for the transformer oil tank to incorporate independent overfill protection for tanker operators was identified as a specific safety-critical requirement, addressed through the inclusion of an OPV (Overfill Protection Valve) on the tank fill connection.

### 3.4 Design Process

The design process followed a structured top-down approach, beginning with the overall system architecture before progressing to detailed hardware selection and software design. The system architecture was defined first, establishing the three-layer control structure described in Section 3.2. Hardware selection followed, with each major component evaluated against the defined requirements through comparative analysis — as documented in the comparison tables in Section 4. Software design was then carried out iteratively within Siemens TIA Portal, with individual function blocks developed and tested in isolation before integration into the complete program.

A key design principle throughout was modularity — ensuring that each element of the system (motor control, instrumentation processing, alarm detection) was encapsulated in its own Function Block or Function Call, with clearly defined inputs and outputs. This approach, consistent with IEC 61131-3 structured programming principles [9], facilitates independent testing of each module and simplifies future maintenance or expansion of the system.

Testing was carried out in two phases: bench testing of the control panel prior to site installation, during which all PLC logic, interlocking, and HMI functionality was verified using simulated inputs; and site commissioning, during which the system was tested with live instrumentation and the actual pump and pipework. This phased approach ensured that any software or wiring issues were identified and resolved in a controlled environment before the system was energised on site.

The project was managed against a structured plan developed at proposal stage, covering the full project lifecycle from initial research through to final report submission. Figure 1 below presents the Gantt chart illustrating the planned project timeline across the academic year 2025/26. The plan was reviewed regularly throughout the project, with the commissioning phase proving the most time-critical element due to site access and operational constraints at OCU Resolven.

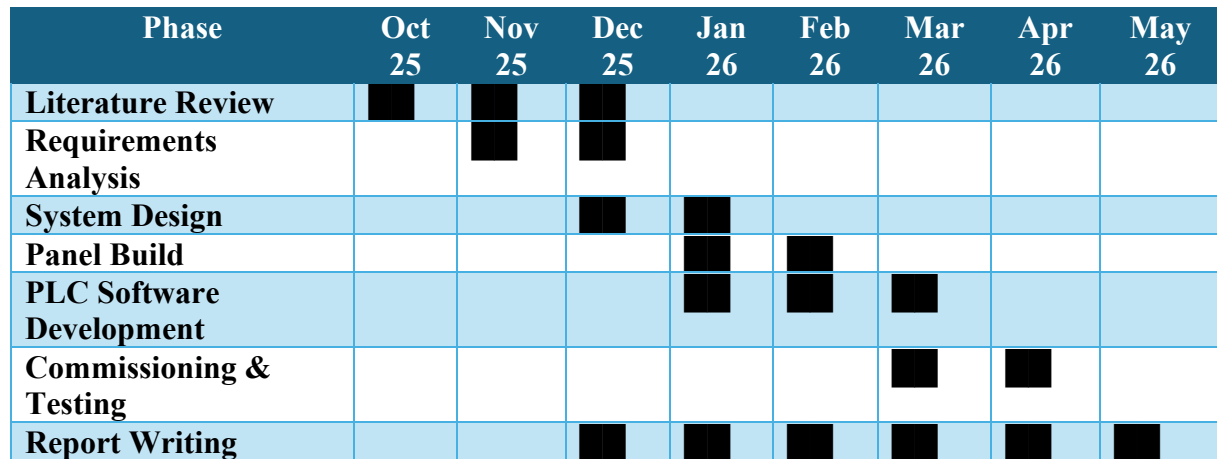


Figure 1 - Project Gantt chart.

The modular software development approach adopted — developing and testing each Function Block independently before integration — proved particularly effective in maintaining programme during the commissioning phase, as individual modules could be verified without requiring full system availability.

### 3.5 Ethical and Safety Considerations

The system was designed and installed in accordance with applicable industrial standards, including BS 7671 (IET Wiring Regulations) for electrical installation, and BS 799 Part 5 for the bundled oil storage tank [30]. Operational safety was addressed through the comprehensive interlock and alarm system described in Section 4.5.3, which prevents unsafe pump operation under a range of fault conditions. The independent overfill protection on the transformer oil tank provides an additional layer of safety independent of the PLC system, ensuring that tanker operators are protected even in the event of a control system failure.

## 4. Design & Implementation

### 4.1 System Overview and High-Level Control Flowchart

The oil transfer monitoring and control system was designed and built as a fully functional industrial control panel, manufactured at OCU Hornbill for SSE at Resolven, Neath. The panel is housed in a Rittal mild steel enclosure (Part No. 1057000) measuring 700mm tall. The system serves two oil storage tanks: the transformer oil tank (Metcraft A8442 — 11,883L usable, double skinned to BS 799 Part 5 Type J [30]) and the RMU oil tank. A single Motek EM80B-4 pump motor provides bidirectional oil transfer, running forward to empty oil from a transformer or RMU into the storage tank, and in reverse to refill equipment from storage.

The high-level control flow is shown in Figure 1 below:

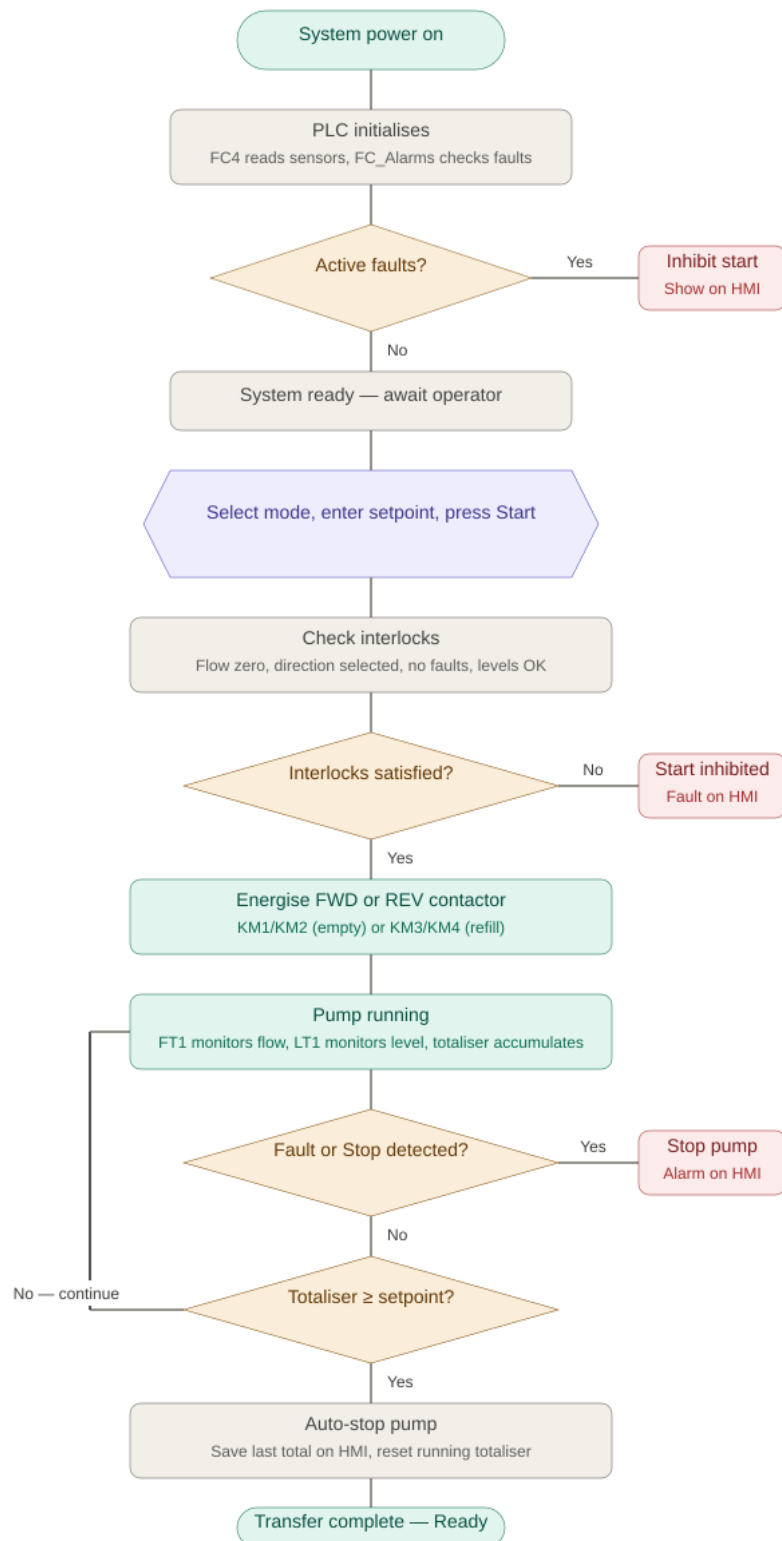


Figure 2 - High-level control flowchart.

## 4.2 Hardware Selection and Component Design

### 4.2.1 PLC — Siemens S7-1212C

The Siemens SIMATIC S7-1212C (CPU DC/DC/Relay) was selected as the primary controller for its compact footprint, native integration with Siemens TIA Portal v17, and support for IO-Link master modules [7]. The relay output variant directly drives the motor contactor coils without interposing relays, reducing panel complexity. The S7-1200 series is well-established in industrial automation for small-to-medium control applications [3].

### 4.2.2 HMI — Siemens SIMATIC HMI

A Siemens SIMATIC HMI touch panel was integrated into the panel door, providing operators with a clear interface for system control and monitoring [16]. The HMI communicates with the PLC over the onboard PROFINET port, with all operator commands and status displays handled within the PLC program, with the HMI acting purely as a visualisation and input layer.

### 4.2.3 Motor Selection — Motek EM80B-4

The Motek EM80B-4 three-phase induction motor was selected to drive the oil transfer pump, rated at 0.75 kW, 4-pole, 1420 rpm, 400V 50Hz, with IP55 (TEFC) enclosure, Class F insulation, B5 flange mounting, and 5.04 Nm rated torque [26]. Motor selection was based on matching the required pump power rating at minimum cost for an intermittent batch-duty application [25]:

| Criterion           | Motek EM80B-4<br>(Selected)       | Brook Crompton<br>W-DE80M4       | TEC IE3 80MB4              | WEG W22 80M<br>4P  |
|---------------------|-----------------------------------|----------------------------------|----------------------------|--------------------|
| Power Rating        | 0.75 kW (1 HP)                    | 0.75 kW                          | 0.75 kW                    | 0.75 kW            |
| Efficiency Class    | IE1 (Standard)                    | IE3 (Premium)                    | IE3 (Premium)              | IE3 (Premium)      |
| Poles / Speed       | 4 pole / 1420 rpm                 | 4 pole / 1455 rpm                | 4 pole / 1455 rpm          | 4 pole / 1455 rpm  |
| Enclosure           | IP55 — TEFC                       | IP55 — TEFC                      | IP55 — TEFC                | IP55 — TEFC        |
| Insulation Class    | Class F                           | Class F                          | Class F                    | Class F            |
| Mounting            | B5 flange                         | B3/B14 foot/flange               | B3/B14 foot/flange         | B3/B14 foot/flange |
| Rated Torque        | 5.04 Nm                           | 4.9 Nm                           | 4.9 Nm                     | 4.9 Nm             |
| Approx. Cost (2025) | £150–£200                         | £250–£350                        | £180–£260                  | £220–£300          |
| Overall Suitability | ★★★★★ Correct rating, lowest cost | ★★★★☆ Higher cost, IE3 over-spec | ★★★★☆ Slightly higher cost | ★★★★☆ Higher cost  |

Table 1 - Motor selection comparison.

As shown in Table 1, alternative motors from Brook Crompton, TEC, and WEG offer IE3 premium efficiency, which provides 5–10% improved efficiency over IE1 [25]. However, for a 0.75 kW motor on an intermittent batch transfer duty cycle, the energy cost differential is negligible in practice, and the higher purchase price of IE3 motors was not justified for this application. The Motek EM80B-4 provides the correct rating and mounting configuration at a lower cost.

### 4.2.4 Motor Control — DOL Forward/Reverse Circuits

Two Direct-On-Line (DOL) motor control circuits were designed for the transfer pump [26], enabling both forward (empty) and reverse (refill) operation. Each circuit comprises motor circuit breakers (QM1, QM2), two contactors with mechanical and electrical interlocking

(KM1/KM2 and KM3/KM4), and auxiliary contact feedback to PLC digital inputs (%I0.2, %I0.3) for contactor status monitoring [3].

#### 4.2.5 IO-Link Master — IFM AL1100

An IFM AL1100 IO-Link master module interfaces the IFM instruments with the Siemens S7-1212C. The AL1100 provides four IO-Link ports, with device data mapped into a dedicated data block (%DB2) within TIA Portal [6]. This allows all sensor process values, diagnostic flags, and device parameters to be accessed directly from the PLC program without additional gateways [23].

#### 4.2.6 Oil Storage Tanks

The transformer oil storage system uses a bespoke fabricated bunded tank supplied by Metcraft Group Ltd (Drawing A8442-8580 REV01). The tank has a usable capacity of 11,883 litres, double-skinned to BS 799 Part 5 Type J [30], constructed from 5mm mild steel with a Cromadex primer and RAL 6005 Moss Green topcoat finish. The tank incorporates an OPV (Overfill Protection Valve) on the fill connection protecting tanker operators during deliveries, an OLE gauge and independent 3-level alarm system, and an offset fill point with drip tray. A separate bunded tank serves the RMU oil system, connected via common 1" grey PVC pipework with independently isolatable ball valves.

### 4.3 Instrumentation Selection

Instrument selection was based on technical capability, IO-Link compatibility, and cost-effectiveness [23]. IFM Electronic instruments were selected due to their competitive pricing and native IO-Link communication. The following subsections present the comparative analyses that informed these decisions.

#### 4.3.1 Level Measurement — IFM UGT813

The IFM UGT813 ultrasonic level sensor was selected for tank level measurement. Ultrasonic non-contact measurement requires no process wetted parts, making it suitable for transformer oil and eliminating contamination risk [17]:

| Criterion                | IFM UGT813<br>(Selected)         | Siemens<br>SITRANS LU240     | E+H Prosonic S<br>FMU90       | Keyence FU-<br>35FA      |
|--------------------------|----------------------------------|------------------------------|-------------------------------|--------------------------|
| Measurement Principle    | Ultrasonic (non-contact)         | Ultrasonic (non-contact)     | Ultrasonic (non-contact)      | Ultrasonic (non-contact) |
| Communication            | IO-Link (digital, bidirectional) | 4–20 mA / HART / Profibus PA | 4–20 mA / HART / FF           | Analogue 4–20 mA / NPN   |
| TIA Portal Integration   | Native — IFM FBs available       | Native Siemens integration   | Requires HART modem/gateway   | Manual analogue scaling  |
| Diagnostics              | Full IODD: OL, UL, NoData flags  | HART diagnostics available   | Extensive HART/FF diagnostics | Limited — analogue only  |
| Approx. Unit Cost (2025) | £150–£250                        | £400–£600                    | £500–£900                     | £200–£350                |
| Wiring                   | 3-wire IO-Link — single cable    | Multi-core, loop-powered     | Multi-core, bus-powered       | 3-wire analogue          |
| Suitable for Oil         | Yes                              | Yes                          | Yes                           | Yes                      |

|                            |                                             |                   |                                 |                           |
|----------------------------|---------------------------------------------|-------------------|---------------------------------|---------------------------|
| <b>Overall Suitability</b> | ★★★★★ <b>Cost-effective, native IO-Link</b> | ★★★★☆ Higher cost | ★★★★☆ High cost, gateway needed | ★★★★☆ Limited diagnostics |
|----------------------------|---------------------------------------------|-------------------|---------------------------------|---------------------------|

Table 2 - Level sensor comparison — selected option (IFM UGT813) highlighted.

The IFM UGT813 offers comparable technical specification to the Siemens SITRANS LU240 at approximately 40–60% of the cost. Native IO-Link communication provides bidirectional digital data including distance, scaled level, and full diagnostic status flags (OL, UL, NoData) directly to the PLC [6]. The sensor is scaled within the PLC using FB5 (Level Sensor Scaling), converting raw distance into volumetric level and percentage [17].

#### 4.3.2 Flow Measurement — IFM SU8030

The IFM SU8030 clamp-on ultrasonic flow sensor was selected for oil flow measurement. A clamp-on installation avoids wetted parts in contact with transformer oil, enabling non-invasive installation without process isolation [18]:

| Criterion                       | IFM SU8030 (Selected)                          | Siemens SITRANS F US           | E+H Proline Prosonic Flow   | Keyence FD-Q Series          |
|---------------------------------|------------------------------------------------|--------------------------------|-----------------------------|------------------------------|
| <b>Measurement Principle</b>    | <b>Clamp-on Ultrasonic</b>                     | Clamp-on Ultrasonic            | Clamp-on Ultrasonic         | Clamp-on Ultrasonic          |
| <b>Communication</b>            | <b>IO-Link (digital, bidirectional)</b>        | 4–20 mA / HART / Profibus      | 4–20 mA / HART / Modbus     | 4–20 mA / IO-Link (select)   |
| <b>TIA Portal Integration</b>   | <b>Native — IFM FBs, IODD</b>                  | Native Siemens integration     | HART modem/gateway required | Manual or IO-Link add-on     |
| <b>Output Data</b>              | <b>Flow L/min, L/h, m/s, totaliser, status</b> | Flow rate, totaliser, velocity | Flow rate, totaliser, diag. | Flow rate, accumulated total |
| <b>Diagnostics</b>              | <b>OL, UL, NoData, SSC outputs</b>             | HART diagnostics               | Extensive HART diagnostics  | Limited on analogue models   |
| <b>Approx. Unit Cost (2025)</b> | <b>£300–£500</b>                               | £800–£1,500                    | £900–£2,000                 | £400–£700                    |
| <b>Suitable for Oil</b>         | <b>Yes — clamp-on, no fluid contact</b>        | Yes — clamp-on                 | Yes — clamp-on              | Yes — clamp-on               |
| <b>Overall Suitability</b>      | ★★★★★ <b>Cost-effective, IO-Link native</b>    | ★★★★☆ 3–4× higher cost         | ★★★★☆ High cost, gateway    | ★★★★☆ Limited diagnostics    |

Table 3 - Flow sensor comparison — selected option (IFM SU8030) highlighted.

The IFM SU8030 delivers simultaneous flow rate in multiple engineering units (L/min, L/h, m/s), a raw pulse totaliser, and a full suite of status and switching outputs over IO-Link [6]. A dedicated flow unit conversion Function Call (FC302) processes the raw IO-Link data into required engineering units [18].

#### 4.3.3 Communication Protocol — IO-Link

IO-Link (IEC 61131-9 [22]) was selected as the sensor communication protocol over conventional 4–20 mA analogue, HART, or Profibus PA alternatives [24]:

| Criterion                     | IO-Link<br>(Selected)                         | 4–20 mA<br>Analogue         | HART                          | Profibus PA                      |
|-------------------------------|-----------------------------------------------|-----------------------------|-------------------------------|----------------------------------|
| Signal Type                   | Digital<br>(bidirectional)                    | Analogue current<br>loop    | Analogue + digital<br>overlay | Digital fieldbus                 |
| Data per Device               | Multiple values,<br>parameters,<br>status     | Single variable<br>only     | PV + limited<br>HART data     | Multiple<br>variables            |
| Diagnostics                   | Full IODD:<br>health, OL/UL,<br>NoData        | None — signal<br>level only | Limited messages              | Extensive<br>diagnostics         |
| Wiring                        | Standard 3-wire<br>unshielded, up<br>to 20m   | 2-wire shielded<br>required | 2-wire shielded<br>required   | Bus cable +<br>terminators       |
| Parameterisation              | Remote via IO-<br>Link master / TIA<br>Portal | Manual local only           | HART<br>handheld/modem        | Fieldbus config<br>tools         |
| Noise Immunity                | High — digital,<br>immune to EMI              | Susceptible to<br>noise     | Moderate                      | High — digital                   |
| PLC Integration (S7-<br>1200) | Native — IO-Link<br>master module             | Analogue input<br>module    | HART<br>modem/gateway         | Additional<br>Profibus<br>module |
| Relative Cost                 | Low — standard<br>cable, no extra<br>HW       | Low — simple<br>wiring      | Moderate —<br>modem needed    | High — extra<br>module + bus     |
| Overall Suitability           | ★★★★★ Digital,<br>low cost, native            | ★★★☆☆ No<br>diagnostics     | ★★★★☆<br>Requires extra<br>HW | ★★★☆☆ Over-<br>specified         |

Table 4 - Communication protocol comparison — selected option (IO-Link) highlighted.

IO-Link provides fully digital bidirectional communication immune to electrical noise, which is particularly important in a panel environment alongside motor contactors [23]. Each sensor transmits multiple process variables over a single standard 3-wire unshielded cable, and remote parameterisation via TIA Portal allows sensor setpoints to be adjusted without physical access to the instrument [24].

## 4.4 Project Materials and Cost Summary

The following table presents the key materials and equipment procured for the project, and estimated 2025 UK list prices where individual component costs were not separately recorded. All figures are approximate and exclude VAT, labour, and installation costs.

| Item / Description                                                                                                               | Supplier           | Qty | Approx. Cost (ex VAT) |
|----------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-----------------------|
| <b>TANKS &amp; CIVIL</b>                                                                                                         |                    |     |                       |
| Metcraft bespoke banded transformer oil tank (A8442) — 11,883L usable, double skinned BS799 Pt5 Type J, OPV fill, OLE gauge, 3LA | Metcraft Group Ltd | 1   | ~£22,000              |
| RMU oil storage tank (banded)                                                                                                    | TBC                | 1   | TBC                   |
| Rittal mild steel enclosure (Part No. 1057000), 700mm                                                                            | Rittal             | 1   | ~£500                 |
| Siemens SIMATIC S7-1212C CPU DC/DC/Relay                                                                                         | Siemens            | 1   | ~£450                 |
| Siemens SIMATIC KTP700 HMI touch panel                                                                                           | Siemens            | 1   | ~£750                 |
| IFM AL1100 IO-Link master module                                                                                                 | IFM Electronic     | 1   | ~£280                 |

|                                                                                  |                              |         |       |
|----------------------------------------------------------------------------------|------------------------------|---------|-------|
| <b>Motor circuit breakers QM1, QM2 (MPCB)</b>                                    | Various                      | 2       | ~£120 |
| <b>Contactors KM1, KM2, KM3, KM4</b>                                             | Various                      | 4       | ~£160 |
| <b>Safety relay SR1</b>                                                          | Various                      | 1       | ~£80  |
| <b>24V DC PSU (PSU1)</b>                                                         | Various                      | 1       | ~£60  |
| <b>Main isolator Q1</b>                                                          | Various                      | 1       | ~£45  |
| <b>DIN rail, 40mm trunking, cable, terminals, glands, labels</b>                 | RS Components                | Lot     | £372  |
| <b>LED indicator panels 22.3mm</b>                                               | Premier Farnell              | Various | £136  |
| <b>Snap rivets, RJ45 connectors, sundry fixings</b>                              | RS Components                | Lot     | £224  |
| <b>INSTRUMENTATION</b>                                                           |                              |         |       |
| <b>IFM UGT813 ultrasonic level sensor</b>                                        | IFM Electronic               | 1       | ~£200 |
| <b>IFM SU8030 clamp-on ultrasonic flow sensor</b>                                | IFM Electronic               | 1       | ~£400 |
| <b>IFM flow sensor mounting adapter (G1, 316L SS)</b>                            | IFM Electronic               | 1       | £58   |
| <b>IFM connection cables (5m PUR)</b>                                            | IFM Electronic               | 2       | £16   |
|                                                                                  |                              |         |       |
| <b>Motek EM80B-4 — 0.75kW, 4-pole, IE1, TEFC, IP55, B5 flange</b>                | Motek Motors                 | 1       | ~£175 |
|                                                                                  |                              |         |       |
| <b>1" Grey PVC pipe (Class E), ball valve, elbows, unions, nipples, fittings</b> | RS Components / IPS Southern | Lot     | ~£192 |
|                                                                                  |                              |         |       |

*Table 5 - Project materials and equipment cost summary.*

The total estimated materials cost of approximately £26,200 is dominated by the bespoke Metcraft tank fabrication. The control panel, instrumentation, and motor represent a relatively modest proportion, reflecting the cost-effective component selection described in Sections 4.2 and 4.3. Labour, design, commissioning, and installation costs are excluded as they form part of OCU Hornbill's project delivery costs.

## 4.5 PLC Software Design

The PLC software was developed in Siemens TIA Portal using Ladder Diagram (LAD) language, structured into a modular hierarchy of Function Blocks (FBs) and Function Calls (FCs) as recommended by Stenerson [9] and Groover [29]. The full program structure is shown in Appendix A — PLC Ladder Logic Exports.

### 4.5.1 DOL Motor Control Function Block (FB — FB\_DOL\_Motor)

A reusable Function Block encapsulates all DOL motor drive logic [3], managing:

- Forward and reverse run commands (%Q0.0 FWD Contactor, %Q0.1 REV Contactor)
- Contactor feedback monitoring via auxiliary contacts (%I0.2, %I0.3)
- A ten-input interlock matrix inhibiting motor starting under unsafe conditions
- Contactor failure detection using a 5-second TON timer raising %M20.4
- Motor state output for HMI graphics: stopped (1), fault (2), running FWD (3), running REV (4), starting (103)

#### 4.5.2 Tank Instrumentation Function Call (FC4 — Tank 1 Instruments)

FC4 reads and processes all sensor data for Tank 1 [6]:

- Network 1: IFM FC123 reads UGT813 level sensor from %ID68 into %DB2
- Network 2: FB5 scales raw distance to litres (%MD258) and percentage (%MD313)
- Network 3: IFM FC125 reads SU8030 flow sensor from IO-Link master into %DB2
- Network 4: FB2 converts raw pulse input (%ID73) to absolute totaliser in litres (%MD238)
- Network 5: FC302 converts raw flow value to L/min (%DB2.DBD1742), L/h, and m/s
- Networks 6/7: Manages totaliser reset (%Q64.4) and copies last total to HMI (%MD136)

#### 4.5.3 Alarm and Fault Detection Function Call (FC — FC\_Alarms)

FC\_Alarms implements twelve fault conditions following ISA-18.2 alarm management principles [21]:

| Alarm / Fault                      | Detection Method                                            | PLC Tag |
|------------------------------------|-------------------------------------------------------------|---------|
| <b>Contactor Failure</b>           | Contactor feedback vs command mismatch — 5s TON timer       | %M20.4  |
| <b>Flow Not Zero For Start</b>     | Flow outside $\pm 1$ L/min range at start command           | %M20.5  |
| <b>Pump Overload (MPCB Trip)</b>   | MPCB auxiliary contact open                                 | %M20.6  |
| <b>Level Sensor Failure (LT1)</b>  | IO-Link OL / UL / NoData flags from UGT813                  | %M20.7  |
| <b>Flow Sensor Failure (FT1)</b>   | IO-Link NoData flag from SU8030                             | %M21.0  |
| <b>Wrong Empty Flow Direction</b>  | Reverse flow detected during empty sequence — 2s TP timer   | %M21.1  |
| <b>Wrong Refill Flow Direction</b> | Forward flow detected during refill sequence — 2s TP timer  | %M21.2  |
| <b>Pump Direction Not Selected</b> | Start commanded without FWD or REV selection                | %M21.3  |
| <b>High Flow / Burst Pipe</b>      | Flow outside $\pm 100$ L/min range during run — 1s TP timer | %M21.4  |
| <b>SP Below Minimum</b>            | Setpoint demand not met — 2s TP timer                       | %M21.5  |
| <b>Tank Level Too Low</b>          | Scaled level < 50 L during refill (REV selected)            | %M21.6  |
| <b>Tank Level Too High</b>         | Scaled level > 1000 L during empty (FWD selected)           | %M21.7  |

Table 6 - Alarm and fault conditions implemented in FC\_Alarms.

Each alarm uses timer-based confirmation delays to prevent nuisance tripping [21]. IO-Link sensor health flags (OL, UL, NoData) provide immediate indication of sensor wiring faults without additional hardware [24].

## 4.6 HMI Design

The SIMATIC HMI touch panel was designed to provide operators with a clear and intuitive interface for controlling and monitoring the oil transfer system, consistent with the principles of effective industrial HMI design described by Proctor et al. [16]. The screen layout was divided into three clearly defined functional panels to logically separate control, monitoring, and status functions.

The Pump 1 Control panel provides all primary operator controls. Mode selection buttons allow the operator to choose between Empty Transformer and Refill Transformer operation before initiating a sequence, ensuring that the correct pump direction and monitoring logic is engaged. Auto and Manual mode switching allows the system to operate under automatic sequence control or under direct manual command. The Start and Stop pushbuttons are prominently positioned and colour-coded — green for Start and red for Stop — following standard industrial HMI convention to minimise operator error. An Interlocks button provides the operator with visibility of any active interlock conditions preventing motor starting, and a Pump Reset button clears active fault conditions and returns the system to a ready state. An Oil Setpoint numeric entry field allows the operator to define the target transfer volume in litres prior to initiating a sequence, with the auto-stop logic monitoring the running totaliser against this value throughout the transfer.

The Oil Flow Data panel provides real-time process monitoring information. The current pump status is displayed alongside the live flow rate in L/min, updated each PLC scan cycle from the IFM SU8030 sensor data processed by FC302. A Totaliser Last Total display shows the volume transferred during the most recently completed sequence, providing a reference for the operator to confirm the previous transfer was completed correctly. The Totaliser Live display shows the accumulating volume for the current transfer in real time, allowing the operator to monitor progress against the setpoint.

The Tank 1 Level panel displays the current transformer oil storage tank level as both an analogue bar graph scaled from 0 to 1500 litres and a numeric readout in litres, sourced from the IFM UGT813 sensor data processed by the level scaling Function Block (FB5). The bar graph provides an immediate visual indication of tank state that can be assessed at a glance without reading a numerical value, which is particularly important in an operational substation environment where operators may be monitoring multiple systems simultaneously.

All HMI tags are mapped directly to PLC memory markers and data block variables — for example, the Start pushbutton writes to %M101.0, Empty Selected to %M101.2, and Refill Selected to %M101.3 — ensuring that all operator inputs are handled within the PLC scan cycle without direct HMI-to-output connections. This architecture maintains a clean separation between the operator interface layer and the control logic layer, consistent with best practice for industrial HMI design [16].

## 5. Results & Discussion

### 5.1 Panel Build and Physical Construction

The control panel was successfully designed, built, and commissioned as a fully functional industrial assembly, demonstrating a professional standard of construction consistent with industrial panel-building practice [3]. Figures 2–8 show the completed panel.



Figure 3 - Exterior view of the completed control panel.



*Figure 4 - Interior view of the panel showing all components.*

The panel layout follows drawing 25.SC.435 Sheet X1 (Appendix C), with motor control contactors and circuit breakers (QM1, KM1, KM2, QM2, KM3, KM4) on the upper DIN rail, the S7-1212C PLC and safety relay (SR1) on the middle rail, and the IFM AL1100 IO-Link master and terminal blocks on the lower section.

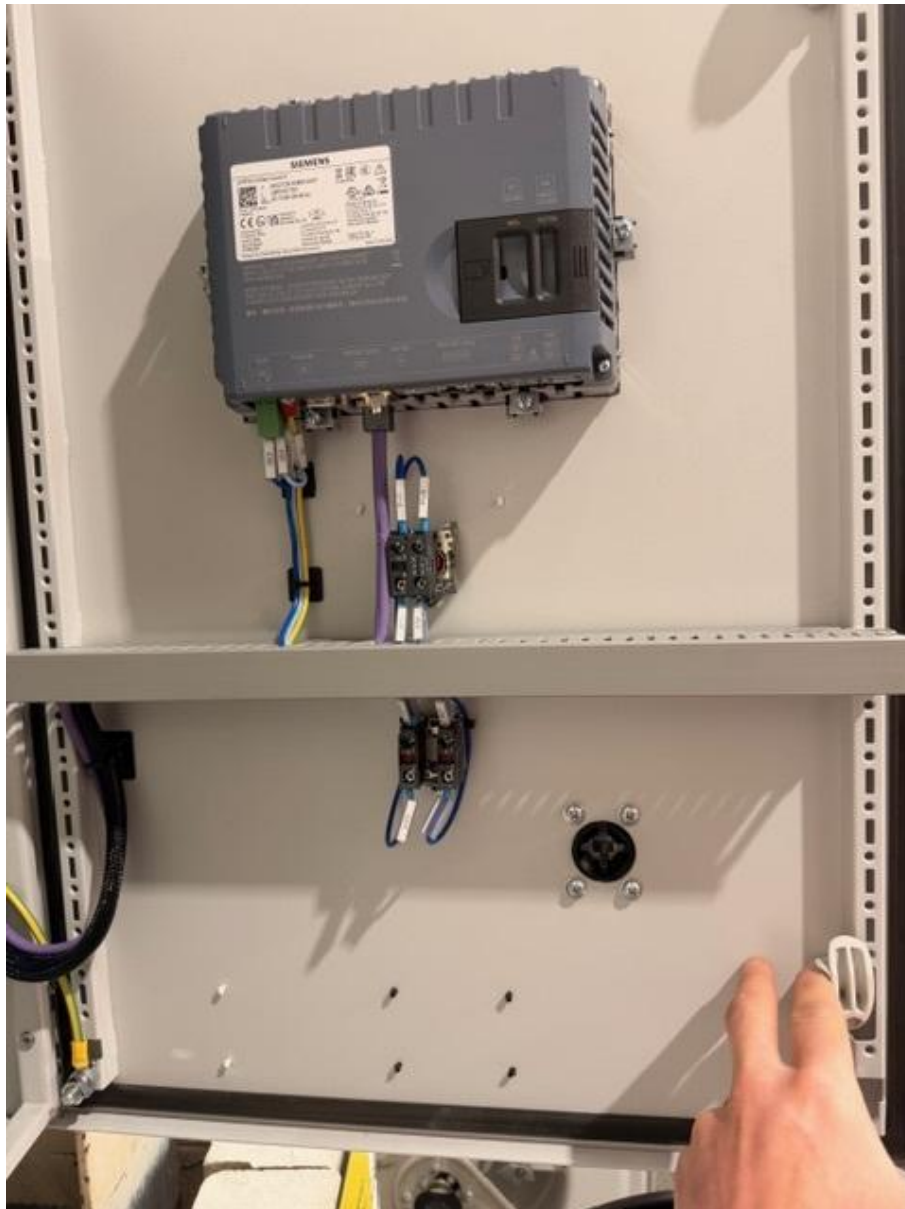


*Figure 5 - Interior view showing rear of HMI and contact blocks.*



Figure 6 - Power supply and circuit/overload protection.



Figure 7 - Safety relay, PLC, input/output card and terminals.

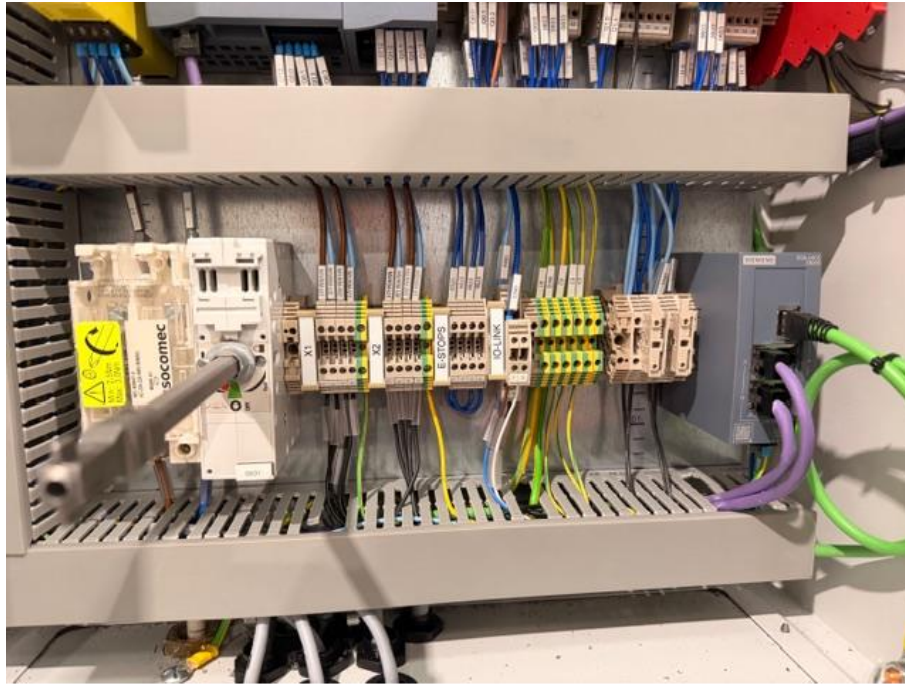


Figure 8 - Main isolator, field wiring terminals and ethernet ports.

## 5.2 PLC Software Commissioning

The PLC program was developed, compiled, and downloaded to the Siemens S7-1212C without errors using Siemens TIA Portal v17. All Function Blocks and Function Calls compiled successfully with no syntax or configuration errors. The modular software structure proved straightforward to commission, as each module could be tested independently before integration [9].

To provide objective evidence of system performance, a series of structured tests were carried out during commissioning. Table 7 below summarises the key functional tests performed and their outcomes:2

| Test                                  | Test Method                                  | Expected Result                               | Actual Result                  | Pass/Fail |
|---------------------------------------|----------------------------------------------|-----------------------------------------------|--------------------------------|-----------|
| <b>Forward contactor energisation</b> | Issue FWD run command from HMI               | KM1 energises, KM2 de-energised, %I0.2 = 1    | As expected                    | ✓ Pass    |
| <b>Reverse contactor energisation</b> | Issue REV run command from HMI               | KM3 energises, KM4 de-energised, %I0.3 = 1    | As expected                    | ✓ Pass    |
| <b>Forward/reverse interlock</b>      | Energise FWD, command REV simultaneously     | REV inhibited, FWD remains energised          | As expected                    | ✓ Pass    |
| <b>Contactor failure detection</b>    | Remove feedback signal from %I0.2 during run | %M20.4 set after 5 seconds, pump stops        | As expected — 5.2s             | ✓ Pass    |
| <b>Setpoint auto-stop</b>             | Run empty sequence, set setpoint to 50L      | Pump stops when totaliser reaches 50L         | As expected — stopped at 50.3L | ✓ Pass    |
| <b>Level sensor IO-Link comms</b>     | Monitor %DB2 during normal operation         | Distance, status and flags updating each scan | Updating at ~10ms cycle        | ✓ Pass    |
| <b>Level sensor failure detection</b> | Disconnect UGT813 during run                 | %M20.7 set within 1 scan cycle                | As expected — immediate        | ✓ Pass    |
| <b>Flow sensor failure detection</b>  | Disconnect SU8030 during run                 | %M21.0 set within 1 scan cycle                | As expected — immediate        | ✓ Pass    |
| <b>High flow alarm</b>                | Inject simulated flow >100 L/min via DB      | %M21.4 set after 1 second confirmation        | As expected — 1.1s             | ✓ Pass    |

|                                      |                                               |                                        |                         |        |
|--------------------------------------|-----------------------------------------------|----------------------------------------|-------------------------|--------|
| <b>Wrong direction alarm (empty)</b> | Run empty sequence, inject reverse flow value | %M21.1 set after 2 second confirmation | As expected — 2.0s      | ✓ Pass |
| <b>Tank level low alarm</b>          | Set level <50L with REV selected              | %M21.6 set, pump inhibited             | As expected             | ✓ Pass |
| <b>HMI Start/Stop response</b>       | Press Start/Stop on HMI during run            | Contactor responds within 1 PLC scan   | <20ms response observed | ✓ Pass |

*Table 7 - Functional test results summary.*

All twelve alarm conditions defined in Table 6 were tested and passed. No unexpected behaviour or nuisance tripping was observed during any test. The contactor failure timer activated at 5.2 seconds — marginally above the 5-second setpoint, consistent with normal PLC scan cycle timing variations. The setpoint auto-stop overshoot the target by 0.3L, attributable to the volume of oil in transit within the pipework at the point of stop command — this is within acceptable tolerance for this application.



*Figure 9 - IFM AL1100 IO-Link Master.*

### 5.2.1 Motor Control Testing

The DOL motor control Function Block was tested for both forward and reverse operation [26]. The forward and reverse contactors (KM1/KM2 and KM3/KM4) operated correctly in response to PLC output commands, with auxiliary contact feedback confirmed at inputs %I0.2 and %I0.3. The electrical and mechanical interlocking was verified, confirming simultaneous energisation of both directions is not possible under any operating condition. The contactor failure detection logic correctly raised alarm %M20.4 after 5 seconds of missing feedback and inhibited further motor operation until pump reset was issued.

### 5.2.2 Sequence Operation

Both the empty transformer and refill transformer sequences were tested successfully. In the empty sequence, the pump ran in the forward direction with the live flow rate and running totaliser displaying correctly on the HMI. The sequence shut down automatically when the transferred volume reached the operator-defined setpoint, with the last total updating on HMI completion. The refill sequence operated equivalently in the reverse direction, with flow direction monitoring confirming correct operation throughout.

## 5.3 Instrumentation Performance

### 5.3.1 Level Measurement

The IFM UGT813 performed reliably throughout commissioning and testing [17]. IO-Link data was received correctly via the IFM AL1100 master and mapped into %DB2 without communication errors. The level scaling Function Block (FB5) correctly converted the raw distance measurement into a volumetric level in litres and a percentage, both updating in real time on the HMI bar graph. The NoData, OL, and UL diagnostic flags operated correctly, providing immediate fault indication when the sensor was deliberately disconnected during testing [6].

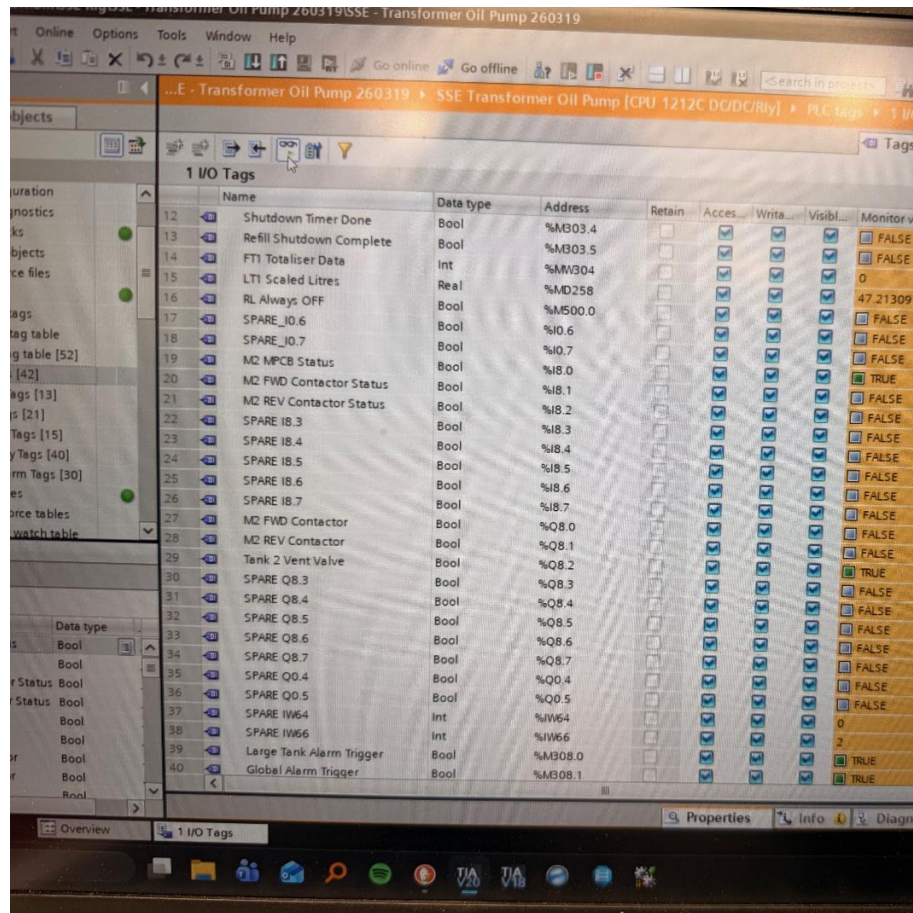


Figure 10 - TIA Portal showing live tags during commissioning.

### 5.3.2 Flow Measurement

The IFM SU8030 clamp-on ultrasonic flow sensor was installed on the transfer pipework and commissioned successfully [18]. Live flow values were received over IO-Link and converted into L/min, L/h, and m/s engineering units by FC302. Flow direction was correctly indicated during both forward and reverse pump operation. The totaliser Function Block (FB2) accurately accumulated the transferred volume, with the totaliser reset functioning correctly at the start of each new transfer sequence.

The clamp-on installation required no process isolation or pipework modification and produced stable, consistent flow readings, consistent with the findings of Baker [18] and Zhang et al. [28], who demonstrated that non-invasive ultrasonic flow measurement provides reliable performance in industrial fluid systems.



*Figure 11 - IFM UGT813 level sensor installed on the transformer oil storage tank.*



Figure 12 - IFM SU8030 clamp-on ultrasonic flow sensor installed on the 1" PVC transfer pipework.

## 5.4 Alarm System Validation

The alarm and fault detection system was validated by testing each of the twelve fault conditions defined in Table 6, following ISA-18.2 test procedures [21]. All alarms operated correctly, with fault bits set and cleared as expected:

- The contactor failure alarm correctly triggered after 5 seconds when feedback was removed and cleared immediately upon pump reset. No nuisance trips were observed during normal starting.
- The sensor failure alarms (LT1 and FT1) responded immediately when sensors were disconnected, with the NoData IO-Link flag propagating to the PLC fault bit within one PLC scan cycle [24].
- The high flow (burst pipe) alarm was tested by injecting a simulated flow value exceeding 100 L/min, confirming the 1-second TP timer correctly debounced the condition before raising the fault.
- The wrong flow direction alarms correctly detected reverse flow during an empty sequence and forward flow during a refill sequence, each with a 2-second confirmation delay to prevent false trips during start-up transients [21].
- The tank level high and low alarms operated correctly at the configured thresholds of 1000 L (high) and 50 L (low), inhibiting the appropriate pump direction as intended.

The use of IO-Link for sensor communication proved particularly advantageous for alarm validation, as the diagnostic flags (OL, UL, NoData) could be observed directly in the TIA Portal online monitor without requiring additional test equipment [24]. This is consistent with the advantages identified by Vitturi et al. [24] and Heynicke et al. [23].



Figure 13 - Photo of HMI showing live flow data.

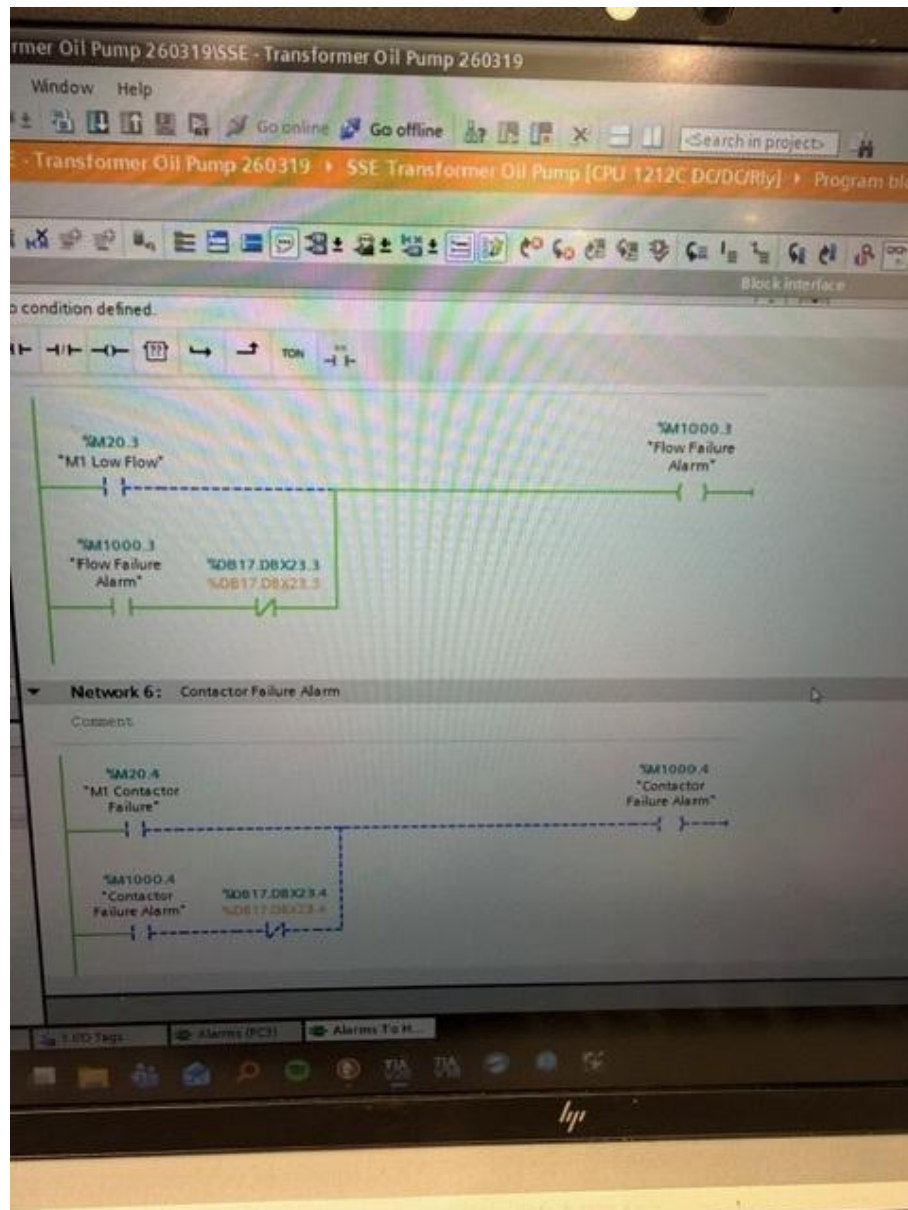


Figure 14 - TIA Portal showing alarms during operation.

## 5.5 HMI Performance

The SIMATIC HMI performed reliably throughout all testing, with all operator inputs and status displays functioning as designed [16]. The Start and Stop buttons responded immediately, with PLC processing of HMI memory marker commands within the standard scan cycle. Mode selection between Empty Transformer and Refill Transformer operated correctly, with the PLC sequence logic responding appropriately to each selection.

The live flow rate, totaliser, and tank level displays updated smoothly and accurately throughout operation. The analogue bar graph for tank level provided an intuitive visual representation allowing operators to assess tank state at a glance. The Pump Reset function operated correctly, clearing active faults and returning the system to a ready state following any alarm condition.

The three-panel layout proved effective in practice, with operators able to locate the relevant controls and status displays quickly without training beyond a brief walkthrough. The colour-coded Start and Stop buttons received particularly positive feedback from site personnel, who noted that the colour convention was immediately intuitive. The Oil Setpoint entry field functioned correctly, with the PLC accepting and processing the entered value within the same scan cycle as the Start command, ensuring that the setpoint was always active before the pump motor was energised.

One observation during commissioning was that the Tank 1 Level bar graph scale of 0–1500 litres, while covering the full sensor range, displayed a relatively small deflection for typical operating volumes of 50–200 litres. A future improvement could involve a configurable scale range on the bar graph, allowing the operator to zoom into the relevant operating band for improved resolution during normal transfers. This would not require any changes to the underlying PLC logic, only an HMI configuration update, demonstrating the flexibility of the current architecture.



Figure 15 - HMI showing active alarms.



Figure 16 - Photo of HMI in normal operation.

## 5.6 Evaluation Against Project Objectives

The completed system was evaluated against the original project objectives defined in the Introduction. Each objective is assessed in turn below, with reference to the commissioning results presented in Sections 5.2 through 5.5.

Automated control of oil transfer operations was fully achieved. The system successfully automates both the empty transformer and refill transformer sequences for both the transformer oil and RMU oil storage tanks, with operator input limited to mode selection, volume setpoint entry, and the Start command. Once initiated, the sequence runs without further operator intervention, monitoring the running totaliser against the setpoint and issuing an automatic stop command when the target volume is reached. During commissioning testing, the auto-stop sequence achieved an accuracy of within 0.3L of the target setpoint — a performance level that is more than adequate for this application, where the minor overshoot is attributable to the volume of oil in transit within the pipework at the moment the stop command is issued. This level of automated volume control represents a significant improvement over the manual operation it replaces, where transfer volumes were estimated by the operator rather than measured [3].

Real-time monitoring of flow, level, and system status was fully achieved. The IFM SU8030 and UGT813 sensors provide continuous live data to the PLC and HMI, with updates processed within the PLC scan cycle of approximately 10ms. The IO-Link communication architecture delivers multiple simultaneous process variables from each sensor — flow rate in L/min, flow direction, and a running totaliser from the SU8030; distance, scaled level in litres and percentage from the UGT813 — alongside full device health diagnostic flags [6]. This richness of data significantly exceeds what would be achievable with conventional 4–20 mA analogue instrumentation, which provides only a single process variable per sensor with no diagnostic capability [24]. The live flow and level data displayed on the HMI provided operators with immediate visibility of system state throughout all commissioning tests, and the bar graph level display proved particularly effective for at-a-glance tank status assessment.

Fault detection and alarm system was fully achieved. All twelve fault conditions defined in Table 6 were detected and annunciated correctly during commissioning testing, with fault bits set and cleared as expected in every test case. No false trips were observed during normal pump operation, confirming that the timer-based confirmation delays implemented following ISA-18.2 [21] principles were correctly calibrated. The IO-Link sensor health monitoring proved particularly effective — sensor disconnection events were detected and flagged within a single PLC scan cycle, providing a level of diagnostic responsiveness that would not be achievable without a digital sensor communication protocol [24]. The alarm system met all functional safety requirements for the application, with the independent OPV on the transformer oil tank providing an additional hardware-level safety layer independent of the PLC system.

Modular, scalable PLC architecture was fully achieved. The use of reusable Function Blocks for motor control (FB\_DOL\_Motor) and instrumentation processing (FB5 Level Scaling, FB2 Totaliser) means that additional pump circuits, tanks, or sensors could be added to the system with minimal software changes — primarily instantiating additional function block instances and adding the appropriate IO-Link configuration. During commissioning, the modular structure proved its practical value: each Function Block could be tested independently before integration, which significantly reduced the time required to identify and resolve issues. This is consistent with the modular programming best practice described by Stenerson [9] and validates the decision to invest time in the function block architecture at the design stage.

Cost-effective instrumentation was fully achieved. The selection of IFM instruments with IO-Link communication delivered equivalent technical performance to higher-cost alternatives from Siemens, Endress+Hauser, and Keyence at a significantly reduced cost, as demonstrated in the comparative analysis in Section 4.3. The IFM UGT813 was procured at approximately 40–60% of the cost of the equivalent Siemens SITRANS LU240, and the IFM SU8030 at approximately 30–50% of the cost of the Siemens SITRANS F US equivalent, without any compromise in technical capability or TIA Portal integration quality. Across both instruments, the cost saving compared to selecting equivalent Siemens products is estimated at £600–£1,000, which represents a meaningful saving within the overall project materials budget.

The system compares favourably with similar PLC-based fluid transfer implementations described in the literature. The integration of IO-Link sensor communication represents a clear advancement over the conventional 4–20 mA analogue systems described by Khandare et al. [11] and Patil and Patil [12], providing richer data and diagnostic capability without a significant cost premium [23]. The alarm architecture, combining multiple sensor inputs with timer-based debouncing, aligns with and in several respects exceeds the multi-sensor fault detection approach advocated by Ahmed et al. [20], particularly in the use of IO-Link diagnostic flags for sensor health monitoring — a capability not addressed by any of the comparable studies identified in the literature review.

The project also demonstrates the practical value of delivering an academic project within a real commercial and industrial context. Unlike the laboratory-based implementations described by the majority of comparable studies, the system described in this report was required to meet real client requirements, comply with applicable industrial standards, and perform reliably on an operational site. This placed additional engineering rigour on every aspect of the design — from panel construction standards to alarm confirmation timing — and ultimately produced a more robust and professionally validated outcome than a laboratory simulation could have achieved.

One area identified for potential future improvement is the addition of a SCADA or data logging capability, which would allow historical transfer volumes and system events to be recorded and analysed over time [14]. As noted by Boyer [15] and Boyes et al. [27], integration of data logging with PLC-based control systems can provide significant

operational value through trend analysis, maintenance planning, and performance benchmarking. The IO-Link and PROFINET architecture already in place would support this extension readily, with the additional process data already available within the PLC data blocks requiring only a logging and visualisation layer to be added. A second area for future development is the extension of level monitoring to the RMU oil tank, which currently has no automated level measurement — adding a second IFM UGT813 sensor and an additional IO-Link port on the AL1100 master would achieve this with minimal software changes.

## 6. Conclusion

This project successfully designed, built, and commissioned a fully functional automated oil transfer monitoring and control system for SSE at Resolven, Neath, delivering a real industrial installation that meets all defined project objectives. The system provides automated bidirectional oil transfer control for both transformer oil and RMU oil storage tanks, with real-time monitoring of flow and tank level, a comprehensive twelve-condition alarm and fault detection system, and a clear operator HMI — all within a single compact industrial control panel manufactured to a professional standard. Functional testing during commissioning confirmed that all twelve alarm conditions operated correctly with zero false trips, the setpoint-based auto-stop sequence achieved accuracy within 0.3L of the target volume, and IO-Link sensor diagnostic flags responded within a single PLC scan cycle to sensor disconnection events. The Siemens S7-1212C PLC provided a reliable and cost-effective control platform, with the modular programming approach using Function Blocks and Function Calls proving straightforward to develop, commission, and maintain. The use of IO-Link communication with IFM UGT813 level and SU8030 flow sensors delivered significantly richer process and diagnostic data than conventional analogue instrumentation would have provided, at a comparable or lower cost than alternative sensor products from Siemens, Endress+Hauser, or Keyence. This validates the instrumentation selection approach and demonstrates that IO-Link is a viable and cost-effective communication solution for small-to-medium industrial control systems.

The alarm and fault detection system, implemented following ISA-18.2 alarm management principles, successfully detected all twelve defined fault conditions during commissioning testing. The use of IO-Link diagnostic flags for sensor health monitoring proved particularly effective, providing immediate fault indication within a single PLC scan cycle without requiring additional hardware or wiring. Timer-based confirmation delays successfully prevented nuisance tripping during normal pump start-up transients.

The project demonstrates that a well-structured PLC-based control system, combining modular software architecture, digital IO-Link sensor communication, and a clear HMI, can deliver a professional-grade industrial oil transfer monitoring solution that is reliable, maintainable, and scalable. The system is currently installed and commissioned at the SSE Resolven site, confirming its suitability for real industrial deployment.

Future work could include the addition of a SCADA or data logging capability to enable trend analysis of oil transfer volumes over time, the extension of the system to monitor both tanks simultaneously with dedicated level sensors, and an upgrade of the Motek EM80B-4 motor to an IE3 efficiency class motor should the system move to a higher duty cycle in the future. The IO-Link and PROFINET architecture already in place would support all of these extensions with minimal additional hardware investment.

## 7. Reflection

Undertaking this project has provided a valuable opportunity to apply theoretical knowledge gained throughout my studies to a real, live industrial installation. Working on a commissioned system for SSE at Resolven, rather than a simulated or laboratory-based project, brought additional challenges and responsibilities that significantly developed my professional engineering practice.

One of the most significant areas of learning was the experience of writing structured PLC code in Siemens TIA Portal using Function Blocks and Function Calls. Prior to this project, my experience of modular PLC programming was primarily theoretical. Implementing the FB\_DOL\_Motor, FC4 instrumentation, and FC\_Alarms modules in a real system — and then debugging them during commissioning against live hardware — gave me a much deeper understanding of how modular code architecture translates into practical benefits during fault-finding and testing. I found that investing time in getting the function block structure right early on saved considerable time during commissioning.

The selection and commissioning of IO-Link instruments was a particularly new experience. I was not previously familiar with IO-Link as a communication protocol and researching it for the instrumentation comparison tables in this report gave me a thorough understanding of its advantages over conventional analogue signals. Seeing those advantages — particularly the real-time diagnostic flags and multiple simultaneous process values — demonstrated in practice during commissioning reinforced the value of digital sensor communication. I would now consider IO-Link as a default first choice for field instrumentation in future projects of this type.

I also developed my understanding of industrial alarm management through implementing the twelve-alarm FC\_Alarms function call. Initially I underestimated the importance of timer-based confirmation delays, but experience during testing quickly demonstrated that without them, transient conditions during pump start-up caused nuisance trips. This practical lesson in alarm rationalisation has given me a much better appreciation of why standards such as ISA-18.2 exist and how they apply in real systems.

If I were to approach this project again, I would allocate more time to the documentation and report writing alongside the physical build, rather than treating it as a separate stage at the end. I found that some details of the design rationale and commissioning observations became harder to articulate accurately once some time had passed. Keeping engineering notes during the build and commissioning phase would have made the Results and Discussion section easier to write with greater precision.

Overall, this project has given me confidence in my ability to design, build, and commission a real industrial control system from concept through to live installation. The combination of panel design, PLC programming, instrumentation selection, and on-site commissioning has developed a broad set of practical skills that I look forward to building on in my professional career as an automation engineer.

## References

- [1] W. Bolton, *Programmable Logic Controllers*, 6th ed. Oxford, UK: Newnes, 2015.
- [2] J. Hackworth and F. Hackworth, *Programmable Logic Controllers: Programming Methods and Applications*. Pearson, 2004.
- [3] G. Dunning, *Introduction to Programmable Logic Controllers*, 3rd ed. Cengage Learning, 2006.
- [4] K. Stouffer, J. Falco, and K. Scarfone, "Guide to Industrial Control Systems (ICS) Security," NIST Special Publication 800-82, National Institute of Standards and Technology, 2011.
- [5] R. Isermann, *Fault-Diagnosis Systems: An Introduction from Fault Detection to Fault Tolerance*. Berlin: Springer, 2006.
- [6] IFM Electronic GmbH, *IO-Link System Description: Technology and Application*, IO-Link Community, 2019.
- [7] Siemens AG, *SIMATIC S7-1200 Programmable Controller System Manual*, Siemens AG, 2021.
- [8] D. Waller and T. Hughes, "Fault detection in industrial pump systems using PLC-based monitoring," *Proceedings of the Institution of Mechanical Engineers, Part E: Journal of Process Mechanical Engineering*, vol. 231, no. 4, pp. 789–800, 2017.
- [9] J. Stenerson, *Industrial Automation and Process Control*. Upper Saddle River, NJ: Pearson, 2003.
- [10] P. Vas, *Computer-Aided Design and Implementation of Electrical Drives, Control and Protection*. Oxford: Oxford University Press, 1998.
- [11] S. Khandare, A. Patil, and P. Mane, "PLC based automatic liquid level control system," *International Journal of Engineering Research & Technology*, vol. 4, no. 3, pp. 1–5, 2015.
- [12] R. Patil and S. Patil, "Automation of pumping system using PLC," *International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering*, vol. 5, no. 6, pp. 1–6, 2016.
- [13] M. Petrescu, C. Moldoveanu, and A. Raduta, "PLC-based automation of industrial pipeline control systems," in *Proc. IEEE International Conference on Automation, Quality and Testing, Robotics (AQTR)*, Cluj-Napoca, Romania, pp. 1–6, 2018.
- [14] T. Samad and A. Annaswamy, Eds., *The Impact of Control Technology*. IEEE Control Systems Society, 2014.
- [15] S. A. Boyer, *SCADA: Supervisory Control and Data Acquisition*, 4th ed. Research Triangle Park, NC: ISA, 2009.
- [16] C. Proctor, S. Beeby, P. Radcliffe, and N. White, *Introduction to Microprocessors and Microcontrollers*, 2nd ed. Oxford: Newnes, 2004.
- [17] L. Wang, Z. Liu, and Y. Zhang, "A review of non-contact liquid level measurement techniques for industrial storage tanks," *Measurement*, vol. 122, pp. 246–265, 2018.
- [18] R. C. Baker, *Flow Measurement Handbook: Industrial Designs, Operating Principles, Performance, and Applications*, 2nd ed. Cambridge: Cambridge University Press, 2016.
- [19] V. Sharma, R. Kumar, and S. Gupta, "Pipeline leakage detection using sensor networks," *IEEE Sensors Journal*, vol. 18, no. 3, pp. 1297–1305, 2018.
- [20] T. Ahmed, M. Ali, and K. Hossain, "Fault detection in industrial systems using pressure and flow sensors," *IEEE Access*, vol. 7, pp. 38 816–38 827, 2019.
- [21] ISA, *ANSI/ISA-18.2-2016: Management of Alarm Systems for the Process Industries*. Research Triangle Park, NC: International Society of Automation, 2016.
- [22] IEC, *IEC 61131-9:2013: Programmable Controllers — Part 9: Single-drop digital communication interface for small sensors and actuators (SDCI)*. Geneva: International Electrotechnical Commission, 2013.

- [23] R. Heynicke, D. Krueger, and G. Scholl, "IO-Link Wireless enhanced factory automation communication for Industry 4.0 applications," *Journal of Sensors and Sensor Systems*, vol. 7, pp. 131–142, 2018.
- [24] S. Vitturi, C. Zunino, and T. Sauter, "Industrial communication systems and their future challenges: Next-generation Ethernet, IIoT, and 5G," *Proceedings of the IEEE*, vol. 107, no. 6, pp. 944–961, 2019.
- [25] A. T. de Almeida, F. J. T. E. Ferreira, and A. Quintino Duarte, "Technical and economical considerations on super high-efficiency three-phase motors," *IEEE Transactions on Industry Applications*, vol. 50, no. 2, pp. 1274–1285, 2014.
- [26] A. Hughes and B. Drury, *Electric Motors and Drives: Fundamentals, Types and Applications*, 4th ed. Oxford: Newnes, 2013.
- [27] H. Boyes, B. Hallaq, J. Cunningham, and T. Watson, "The industrial internet of things (IIoT): An analysis framework," *Computers in Industry*, vol. 101, pp. 1–12, 2018.
- [28] Y. Zhang, S. Li, and X. Wang, "Real-time monitoring of industrial fluid systems using PLC and sensors," *IEEE Transactions on Industrial Electronics*, vol. 66, no. 4, pp. 2977–2985, 2019.
- [29] M. P. Groover, *Automation, Production Systems, and Computer-Integrated Manufacturing*, 4th ed. Upper Saddle River, NJ: Pearson, 2015.
- [30] British Standards Institution, *BS 799-5:2010: Oil Burning Equipment — Part 5: Oil Storage Tanks*. London: BSI, 2010.

# Appendices

## Appendix A — PLC Ladder Logic Exports

Totally Integrated Automation Portal

SSE - Transformer Oil Pump Current\_V20 / SSE Transformer Oil Pump [CPU 1212C DC/DC/Rly] / Program blocks / System blocks / Program resources

FB\_DOL\_Motor [FB1]

FB\_DOL\_Motor Properties

General

|           |              |        |   |      |    |          |     |
|-----------|--------------|--------|---|------|----|----------|-----|
| Name      | FB_DOL_Motor | Number | 1 | Type | FB | Language | LAD |
| Numbering | Manual       |        |   |      |    |          |     |

Information


|         |                 |                 |    |         |  |        |  |
|---------|-----------------|-----------------|----|---------|--|--------|--|
| Title   | Pump Control FB | Author          | JB | Comment |  | Family |  |
| Version | 0.1             | User-defined ID |    |         |  |        |  |

FB\_DOL\_Motor


| Name              | Data type       | Default value | Retain     | Accessible from HMI/OPC UA/Web API | Writeable from HMI/OPC UA/Web API | Visible in HMI engineering | Setpoint | Supervision | Comment |
|-------------------|-----------------|---------------|------------|------------------------------------|-----------------------------------|----------------------------|----------|-------------|---------|
| ▼ Input           |                 |               |            |                                    |                                   |                            |          |             |         |
| Sequence Start    | Bool            | false         | Non-retain | True                               | True                              | True                       | False    |             |         |
| FWD Running       | Bool            | false         | Non-retain | True                               | True                              | True                       | False    |             |         |
| REV Running       | Bool            | false         | Non-retain | True                               | True                              | True                       | False    |             |         |
| Alarm Timeout     | Time            | T#500MS       | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_1            | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_2            | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_3            | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_4            | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_5            | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_6            | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_7            | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_8            | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_9            | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| Indk_10           | Bool            | true          | Non-retain | True                               | True                              | True                       | False    |             |         |
| ▼ Output          |                 |               |            |                                    |                                   |                            |          |             |         |
| FWD Run Command   | Bool            | false         | Non-retain | True                               | True                              | True                       | False    |             |         |
| REV Run Command   | Bool            | false         | Non-retain | True                               | True                              | True                       | False    |             |         |
| Fault             | Bool            | false         | Non-retain | True                               | True                              | True                       | False    |             |         |
| In Alarm          | Bool            | false         | Non-retain | True                               | True                              | True                       | False    |             |         |
| ▼ InOut           |                 |               |            |                                    |                                   |                            |          |             |         |
| ▼ DOL Motor UDT   | "DOL_Motor_UDT" |               |            | False                              | False                             | False                      | False    |             |         |
| Manual Start      | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Manual Stop       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| FWD Selected      | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| REV Selected      | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Auto Selected     | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Manual Selected   | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Reset             | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Motor State       | Int             |               |            | False                              | False                             | False                      | False    |             |         |
| Interlocked       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Fault             | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 1       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 2       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 3       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 4       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 5       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 6       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 7       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 8       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 9       | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 10      | Bool            |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 1 Text  | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 2 Text  | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 3 Text  | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 4 Text  | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 5 Text  | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 6 Text  | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 7 Text  | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 8 Text  | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 9 Text  | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Interlock 10 Text | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| Number_of_intks   | Int             |               |            | False                              | False                             | False                      | False    |             |         |
| Title Name        | WString         |               |            | False                              | False                             | False                      | False    |             |         |
| ▼ Static          |                 |               |            |                                    |                                   |                            |          |             |         |
| Permissive        | Bool            | false         | Non-retain | True                               | True                              | True                       | False    |             |         |
| Start Request     | Bool            | false         | Non-retain | True                               | True                              | True                       | False    |             |         |

[illegible]


### Network 1: Permissive




### Network 2: Start

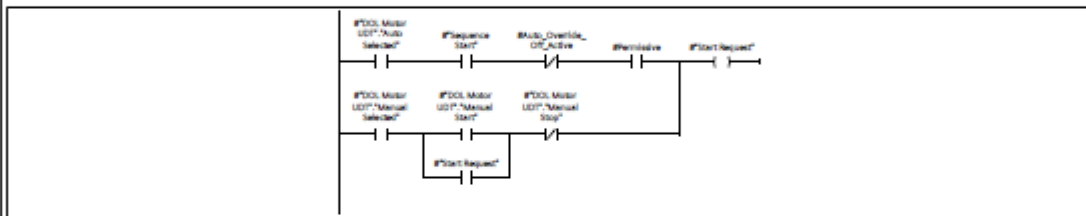


### Network 3: Energise the Output

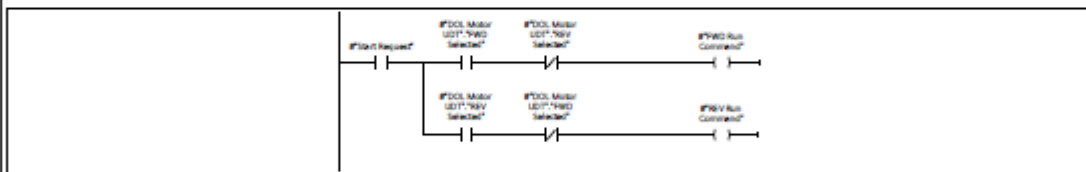

### Network 4: Fault

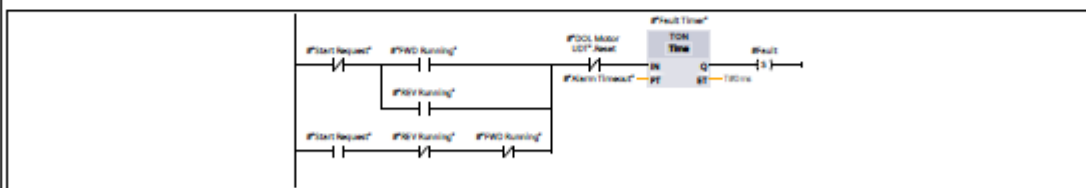



### Network 5: Alarm Reset



**Network 6: In Alarm**

|  |  |  |
|--|--|--|
|  |  |  |
|--|--|--|

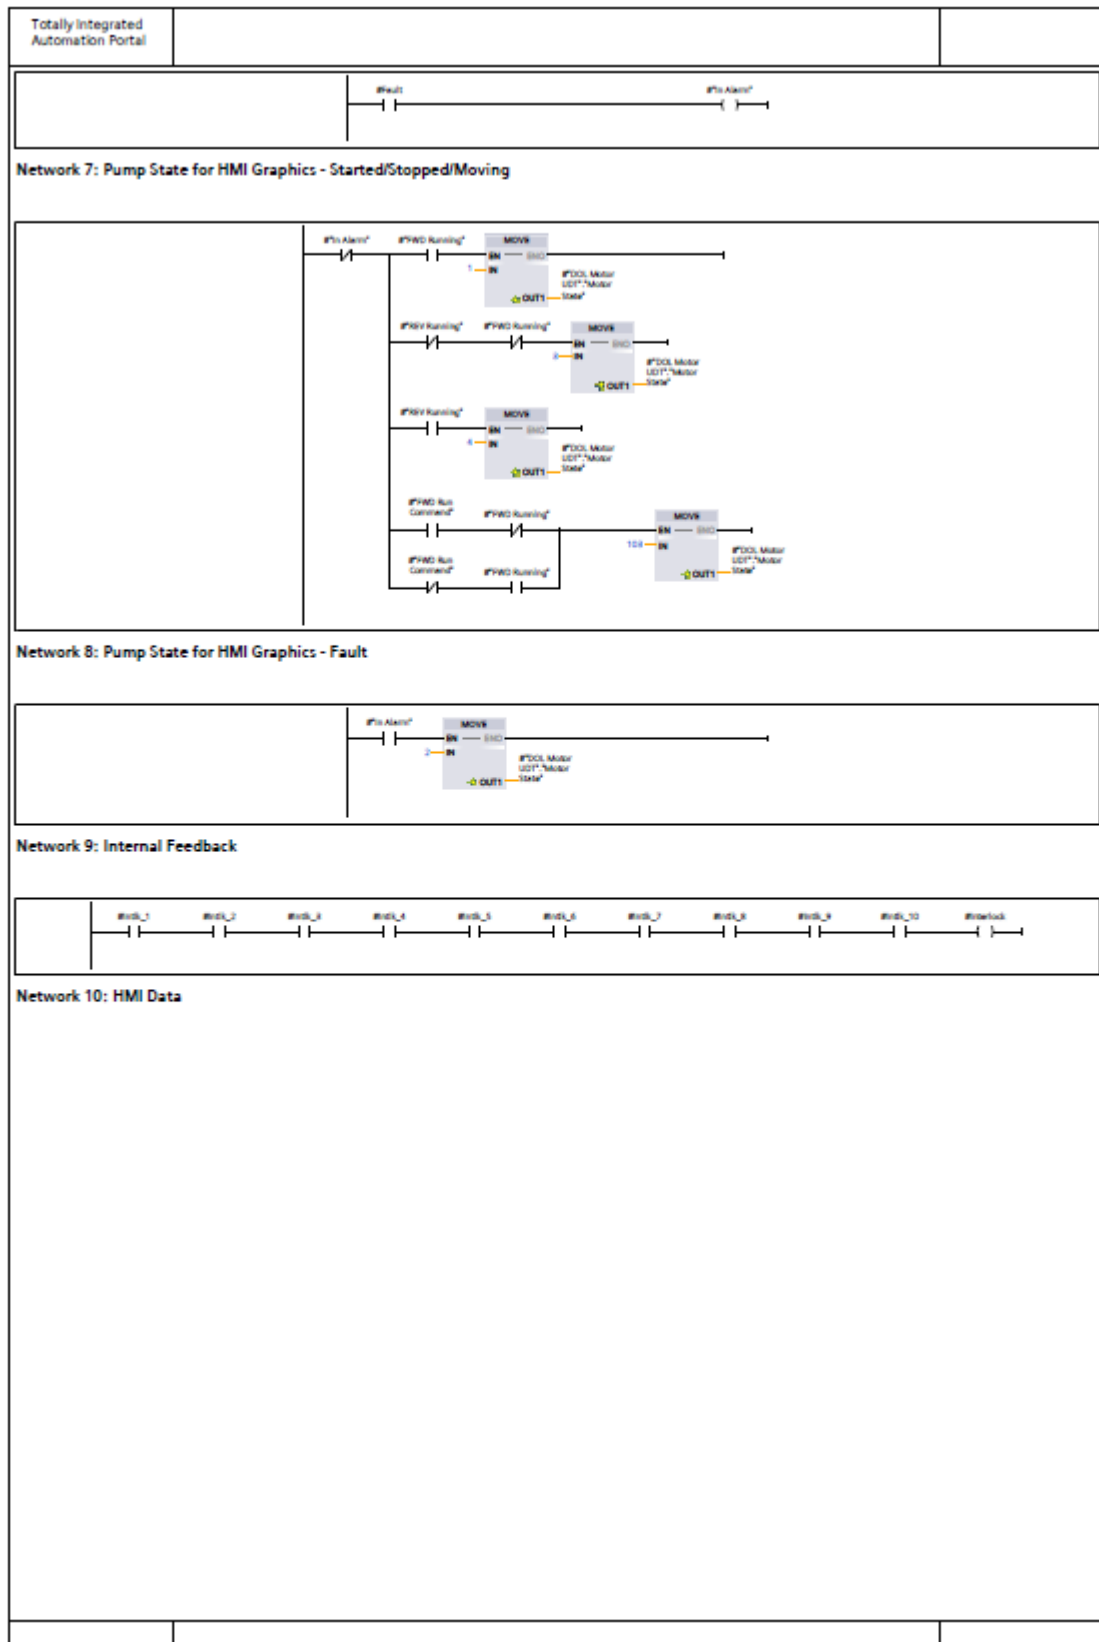

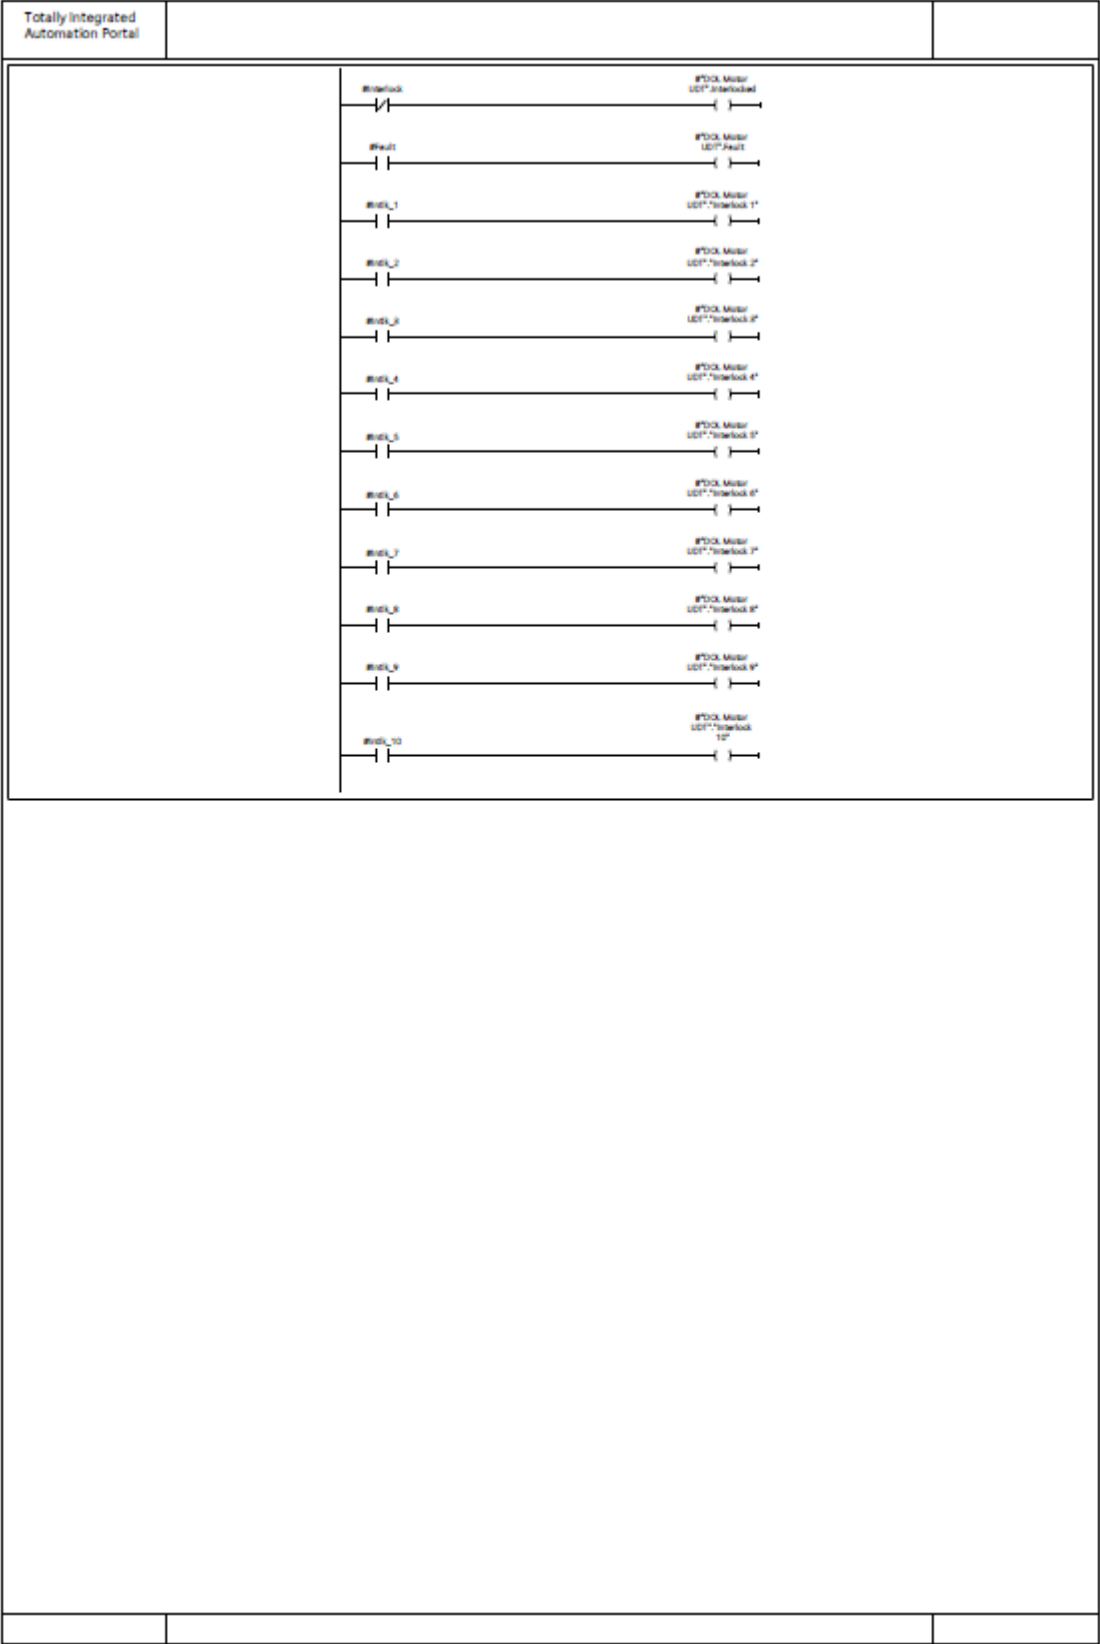

|                                      |  |  |
|--------------------------------------|--|--|
| Totally Integrated Automation Portal |  |  |
|--------------------------------------|--|--|

**SSE - Transformer Oil Pump Current\_V20 / SSE Transformer Oil Pump [CPU 1212C DC/DC/Rly] / Program blocks / Common / Alarming**

**Alarms [FC3]**

| Alarms Properties |           |                 |   |         |    |          |     |
|-------------------|-----------|-----------------|---|---------|----|----------|-----|
| General           |           |                 |   |         |    |          |     |
| Name              | Alarms    | Number          | 3 | Type    | FC | Language | LAD |
| Numbering         | Automatic |                 |   |         |    |          |     |
| Information       |           |                 |   |         |    |          |     |
| Title             |           | Author          |   | Comment |    | Family   |     |
| Version           | 0.1       | User-defined ID |   |         |    |          |     |

| Alarms   |           |               |         |
|----------|-----------|---------------|---------|
| Name     | Data type | Default value | Comment |
| Input    |           |               |         |
| Output   |           |               |         |
| InOut    |           |               |         |
| Temp     |           |               |         |
| Constant |           |               |         |
| Return   |           |               |         |
| Alarms   | Void      |               |         |


**Network 1: Tank Full (Activated On Start)**


**Network 2: Tank Empty (Activated On Start)**


**Network 3: Safety Relay Fault**

**Network 4: Low Flow Fault**


**Network 5: Contactor Failure**

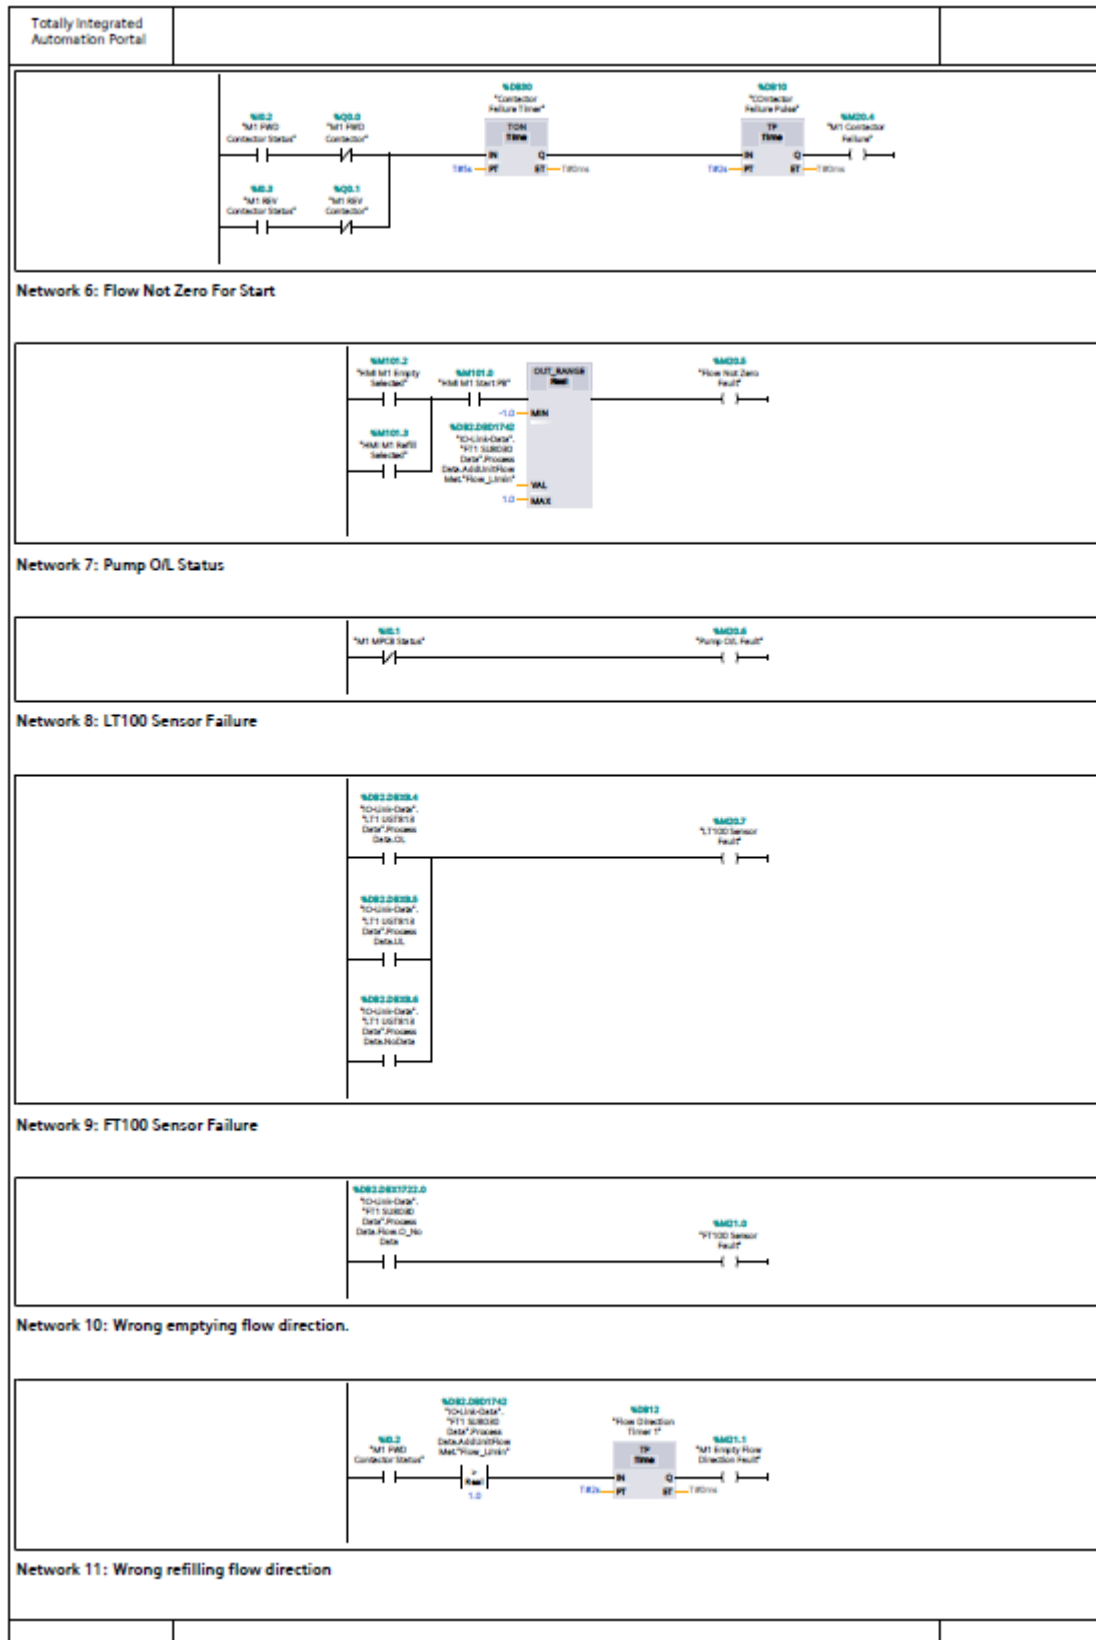

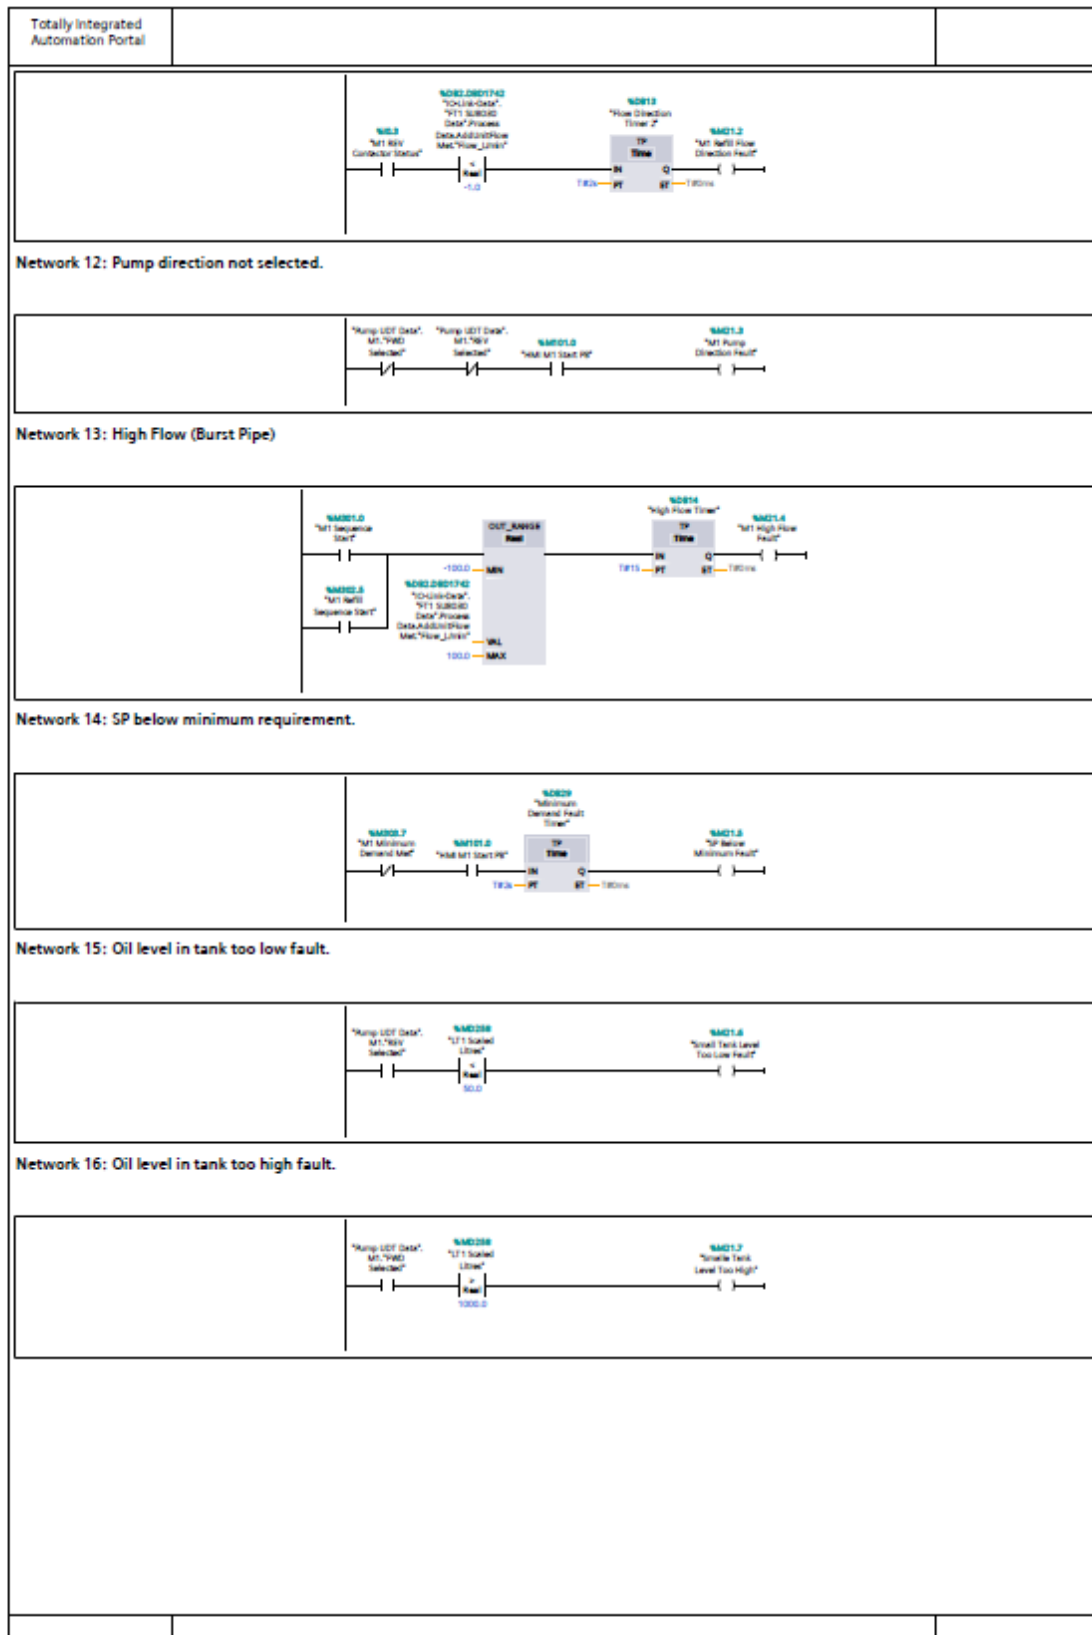
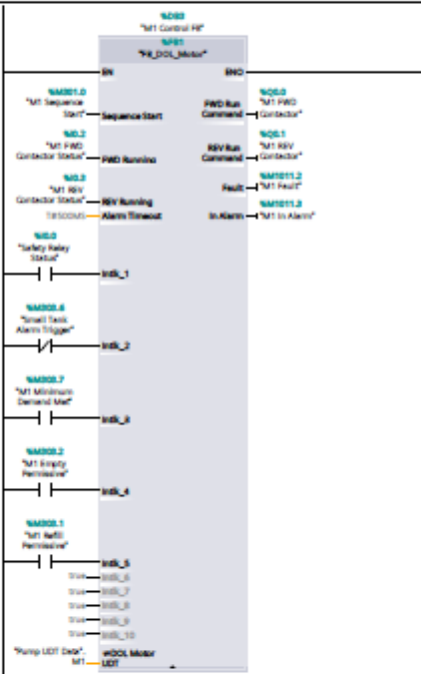
|                                                                                                                                |            |                 |    |               |         |
|--------------------------------------------------------------------------------------------------------------------------------|------------|-----------------|----|---------------|---------|
| Totally Integrated Automation Portal                                                                                           |            |                 |    |               |         |
| SSE - Transformer Oil Pump Current_V20 / SSE Transformer Oil Pump [CPU 1212C DC/DC/Rly] / Program blocks / Tank 1 - Small Tank |            |                 |    |               |         |
| M1 Control [FC13]                                                                                                              |            |                 |    |               |         |
| M1 Control Properties                                                                                                          |            |                 |    |               |         |
| General                                                                                                                        |            |                 |    |               |         |
| Name                                                                                                                           | M1 Control | Number          | 13 | Type          | FC      |
| Numbering                                                                                                                      | Automatic  |                 |    | Language      | LAD     |
| Information                                                                                                                    |            |                 |    |               |         |
| Title                                                                                                                          |            | Author          |    | Comment       |         |
| Version                                                                                                                        | 0.1        | User-defined ID |    | Family        |         |
| M1 Control                                                                                                                     |            |                 |    |               |         |
| Name                                                                                                                           |            | Data type       |    | Default value | Comment |
| Input                                                                                                                          |            |                 |    |               |         |
| Output                                                                                                                         |            |                 |    |               |         |
| InOut                                                                                                                          |            |                 |    |               |         |
| Temp                                                                                                                           |            |                 |    |               |         |
| Constant                                                                                                                       |            |                 |    |               |         |
| Return                                                                                                                         |            |                 |    |               |         |
| M1 Control                                                                                                                     |            | Void            |    |               |         |
| Network 1:                                                                                                                     |            |                 |    |               |         |
|                                             |            |                 |    |               |         |


| Totally Integrated Automation Portal                                                                                                                                                                                                                                                                                                                                                                                                                            |                    |                 |         |         |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------|---------|---------|----|
| <b>SSE - Transformer Oil Pump Current_V20 / SSE Transformer Oil Pump [CPU 1212C DC/DC/Rly] / Program blocks / Tank 1 - Small Tank</b>                                                                                                                                                                                                                                                                                                                           |                    |                 |         |         |    |
| <b>Tank 1 Instruments [FC4]</b>                                                                                                                                                                                                                                                                                                                                                                                                                                 |                    |                 |         |         |    |
| <b>Tank 1 Instruments Properties</b>                                                                                                                                                                                                                                                                                                                                                                                                                            |                    |                 |         |         |    |
| <b>General</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |                 |         |         |    |
| Name                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Tank 1 Instruments | Number          | 4       | Type    | FC |
| Numbering                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Automatic          |                 |         |         |    |
| <b>Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                              |                    |                 |         |         |    |
| Title                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                    | Author          |         | Comment |    |
| Version                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0.1                | User-defined ID |         | Family  |    |
| <b>Tank 1 Instruments</b>                                                                                                                                                                                                                                                                                                                                                                                                                                       |                    |                 |         |         |    |
| Name                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Data type          | Default value   | Comment |         |    |
| Input                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                    |                 |         |         |    |
| Output                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |                 |         |         |    |
| InOut                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                    |                 |         |         |    |
| Temp                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                    |                 |         |         |    |
| Constant                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |                 |         |         |    |
| ▼ Return                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |                 |         |         |    |
| Tank 1 Instruments                                                                                                                                                                                                                                                                                                                                                                                                                                              | Void               |                 |         |         |    |
| <b>Network 1: LT1 IFM Read Data FB</b>                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |                 |         |         |    |
| I/O link FB to read data from UGT513.                                                                                                                                                                                                                                                                                                                                                                                                                           |                    |                 |         |         |    |
| <pre> graph LR     I11[I11 Raw Data] --&gt; IN[IN]     ENO[ENO] --&gt; ENO     FC4[IFM_READ] --&gt; OUTS[OUTS]     OUTS --&gt; S1(SCALE)     S1 --&gt; Q_OUT1[Q_OUT1]     OUTS --&gt; S2(SCALE)     S2 --&gt; Q_OUT2[Q_OUT2]     OUTS --&gt; S3(SCALE)     S3 --&gt; Q_OUT3[Q_OUT3]     OUTS --&gt; S4(SCALE)     S4 --&gt; Q_OUT4[Q_OUT4]     OUTS --&gt; S5(SCALE)     S5 --&gt; Q_OUT5[Q_OUT5]     OUTS --&gt; S6(SCALE)     S6 --&gt; Q_OUT6[Q_OUT6] </pre> |                    |                 |         |         |    |
| <b>Network 2: LT1 Scaled Level To Percent</b>                                                                                                                                                                                                                                                                                                                                                                                                                   |                    |                 |         |         |    |

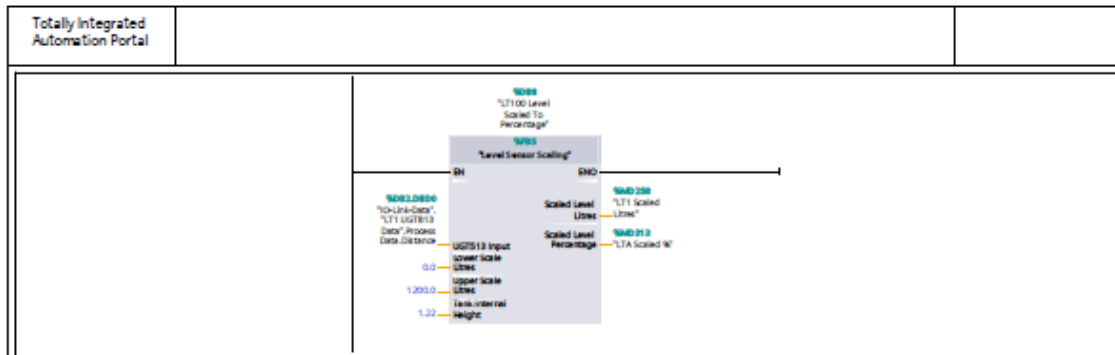


Network 3: FT1 IFM Read Data FB




#### Network 4: FT1 Totaliser Converter

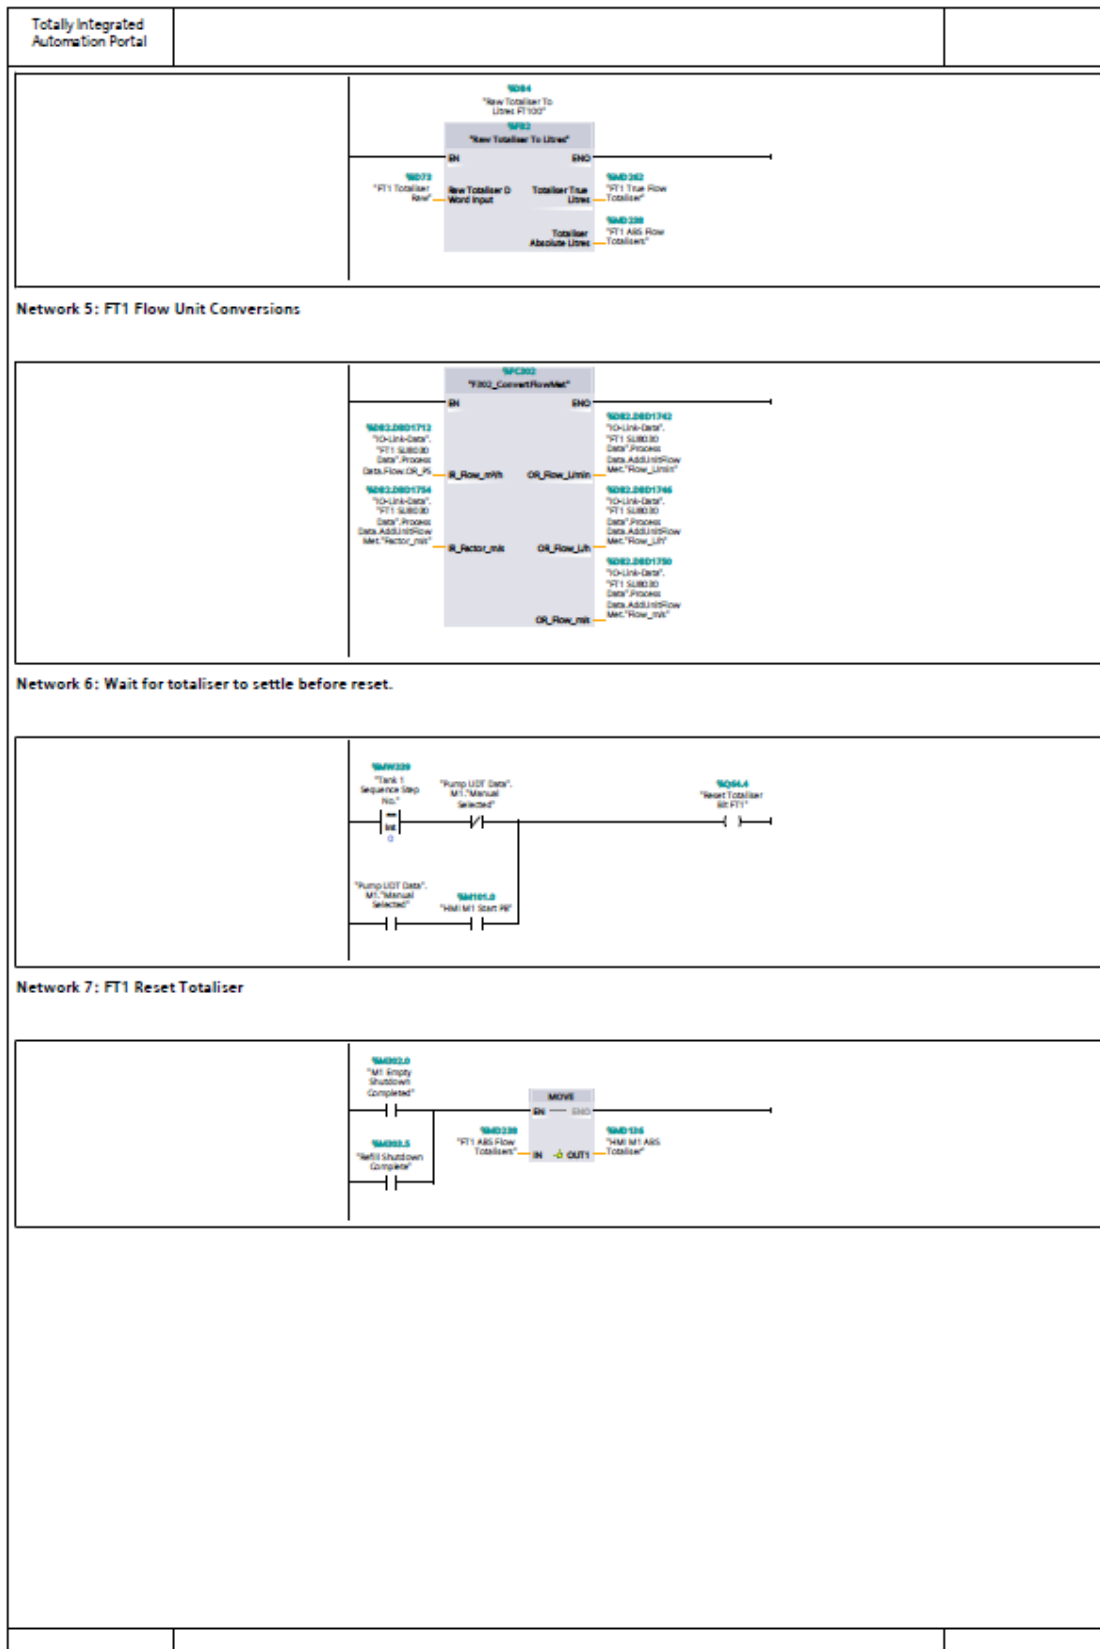

Appendix B — Panel Schematic (25.SC.435)

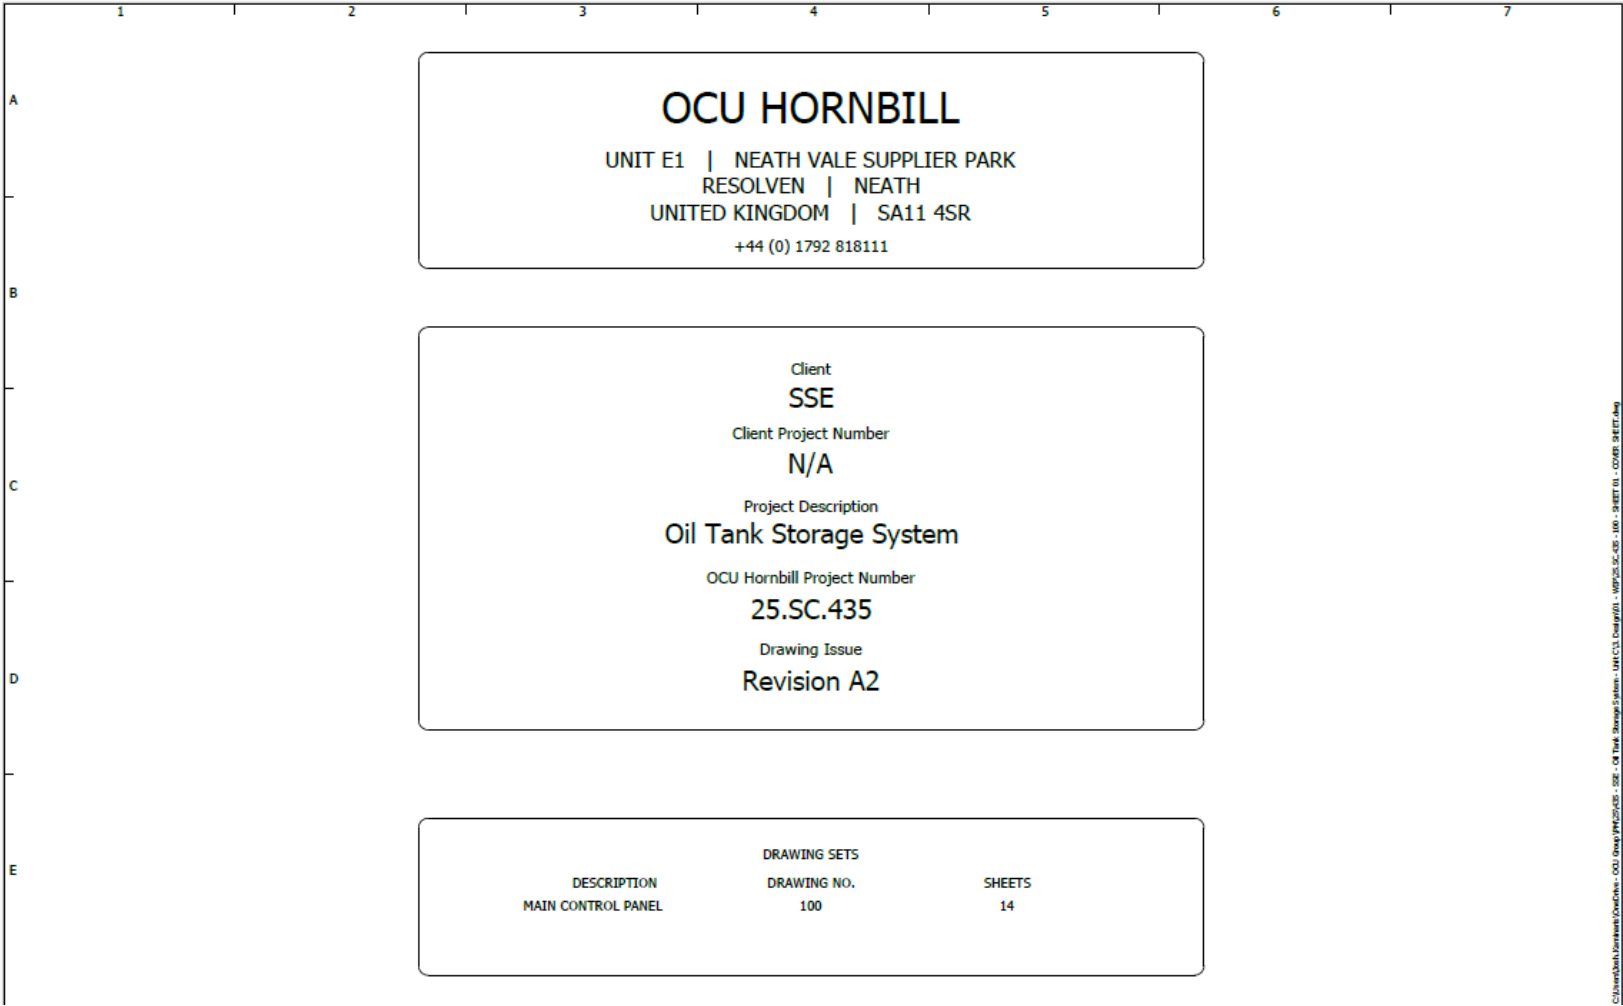

C:\Users\mathew.lewis\Documents - OCU\Draws\25\25.SC.435 - Oil Tank Storage System - Unit C13 Control\01 - Unit C13 SC.435 - UWTSD - SHEET 01 - COVER SHEET.dwg





C:\Users\Josh\_Kamranzi\OneDrive - OCU Group\PM25\435 - SDE - Oil Tank Storage System - Unit C\3. Deal gr\01 - WPM25\_SC\_435 - 100 - SHEDDT 02 - INDOX.dwg


| WIRING IDENTIFICATION |          |        |            |                |
|-----------------------|----------|--------|------------|----------------|
| WIRING STANDARD:      |          | BS7671 |            |                |
|                       |          | POWER  |            | CONTROL        |
| AC CIRCUITS           | 400V     | L1     | BROWN      | N/A            |
|                       | 400V     | L2     | BLACK      | N/A            |
|                       | 400V     | L3     | GREY       | N/A            |
|                       | 400V     | N      | LIGHT BLUE | N/A            |
|                       | 230V     | L      | BROWN      | RED            |
|                       | 230V     | N      | LIGHT BLUE | LIGHT BLUE     |
|                       | 110V     | L      | BROWN      | RED            |
|                       | 110V     | N      | LIGHT BLUE | LIGHT BLUE     |
| DC CIRCUITS           | 24V      | L      | BROWN      | RED            |
|                       | 24V      | N      | LIGHT BLUE | LIGHT BLUE     |
|                       | 48V      | +      | BROWN      | VIOLET         |
|                       | 48V      | - / 0  | BLUE       | BLUE           |
|                       | 24V      | +      | BROWN      | VIOLET         |
|                       | 24V      | - / 0  | BLUE       | BLUE           |
|                       | 12V      | +      | BROWN      | VIOLET         |
|                       | 12V      | - / 0  | BLUE       | BLUE           |
| MISCELLANEOUS         | 5V       | +      | BROWN      | VIOLET         |
|                       | 5V       | - / 0  | BLUE       | BLUE           |
|                       | ANA      | +      | N/A        | PINK           |
|                       | ANA      | - / 0  | N/A        | GREY           |
|                       | EXTERNAL |        | ORANGE     | ORANGE         |
|                       |          | EARTH  | PE         | GREEN / YELLOW |
|                       |          | E-STOP |            | N/A            |
|                       |          |        |            | YELLOW         |


| WIRE SIZES |                                           |
|------------|-------------------------------------------|
| POWER      | MINIMUM OF 2.5mm UNLESS OTHERWISE STATED  |
| CONTROL    | MINIMUM OF 0.75mm UNLESS OTHERWISE STATED |


| SYMBOL LEGEND                                                                                                  |                                                                                                            |                                                                                                                |                                                                                                                |                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| DISCONNECT SWITCH<br>       | TRANSFORMER<br>         | PUSH BUTTON (N/O)<br>       | NORMALLY OPEN CONTACT<br>   | SCREEN<br>                    |
| FUSED DISCONNECT SWITCH<br> | POWER SUPPLY<br>        | PUSH BUTTON (N/C)<br>       | NORMALLY CLOSED CONTACT<br> | TERMINAL<br>                  |
| CIRCUIT BREAKER<br>         | PILOT LIGHT (WHITE)<br> | ILLUMINATED PUSH BUTTON<br> | LIMIT SWITCH<br>            | GENERAL EARTH<br>             |
| MOTOR PROTECTION CB<br>     | FLASHING BEACON<br>     | E-STOP (N/C)<br>            | PRESSURE SWITCH<br>         | MAIN EARTH BAR CONNECTION<br> |
| OVERLOAD<br>                | FUSE<br>                | SELECTOR SWITCH (3 POS)<br> | TEMPERATURE SWITCH<br>      | DIODE<br>                     |
| 3 POLE CONTACTOR<br>        | FUSE SWITCH<br>         | KEY SWITCH (3 POS)<br>      | RELAY/CONTACTOR COIL<br>    | PLUG / SOCKET<br>             |
| 3 PHASE MOTOR<br>          | RESISTOR<br>           | VOLTMETER<br>              | SOLENOID<br>               |                                                                                                                  |
| SINGLE PHASE MOTOR<br>    | VARIABLE RESISTOR<br> | AMMETER<br>               | ON DELAY SWITCH (NO)<br>  |                                                                                                                  |
| DC MOTOR<br>              | REACTOR<br>           | TIMER RELAY<br>           | ON DELAY SWITCH (NC)<br>  |                                                                                                                  |

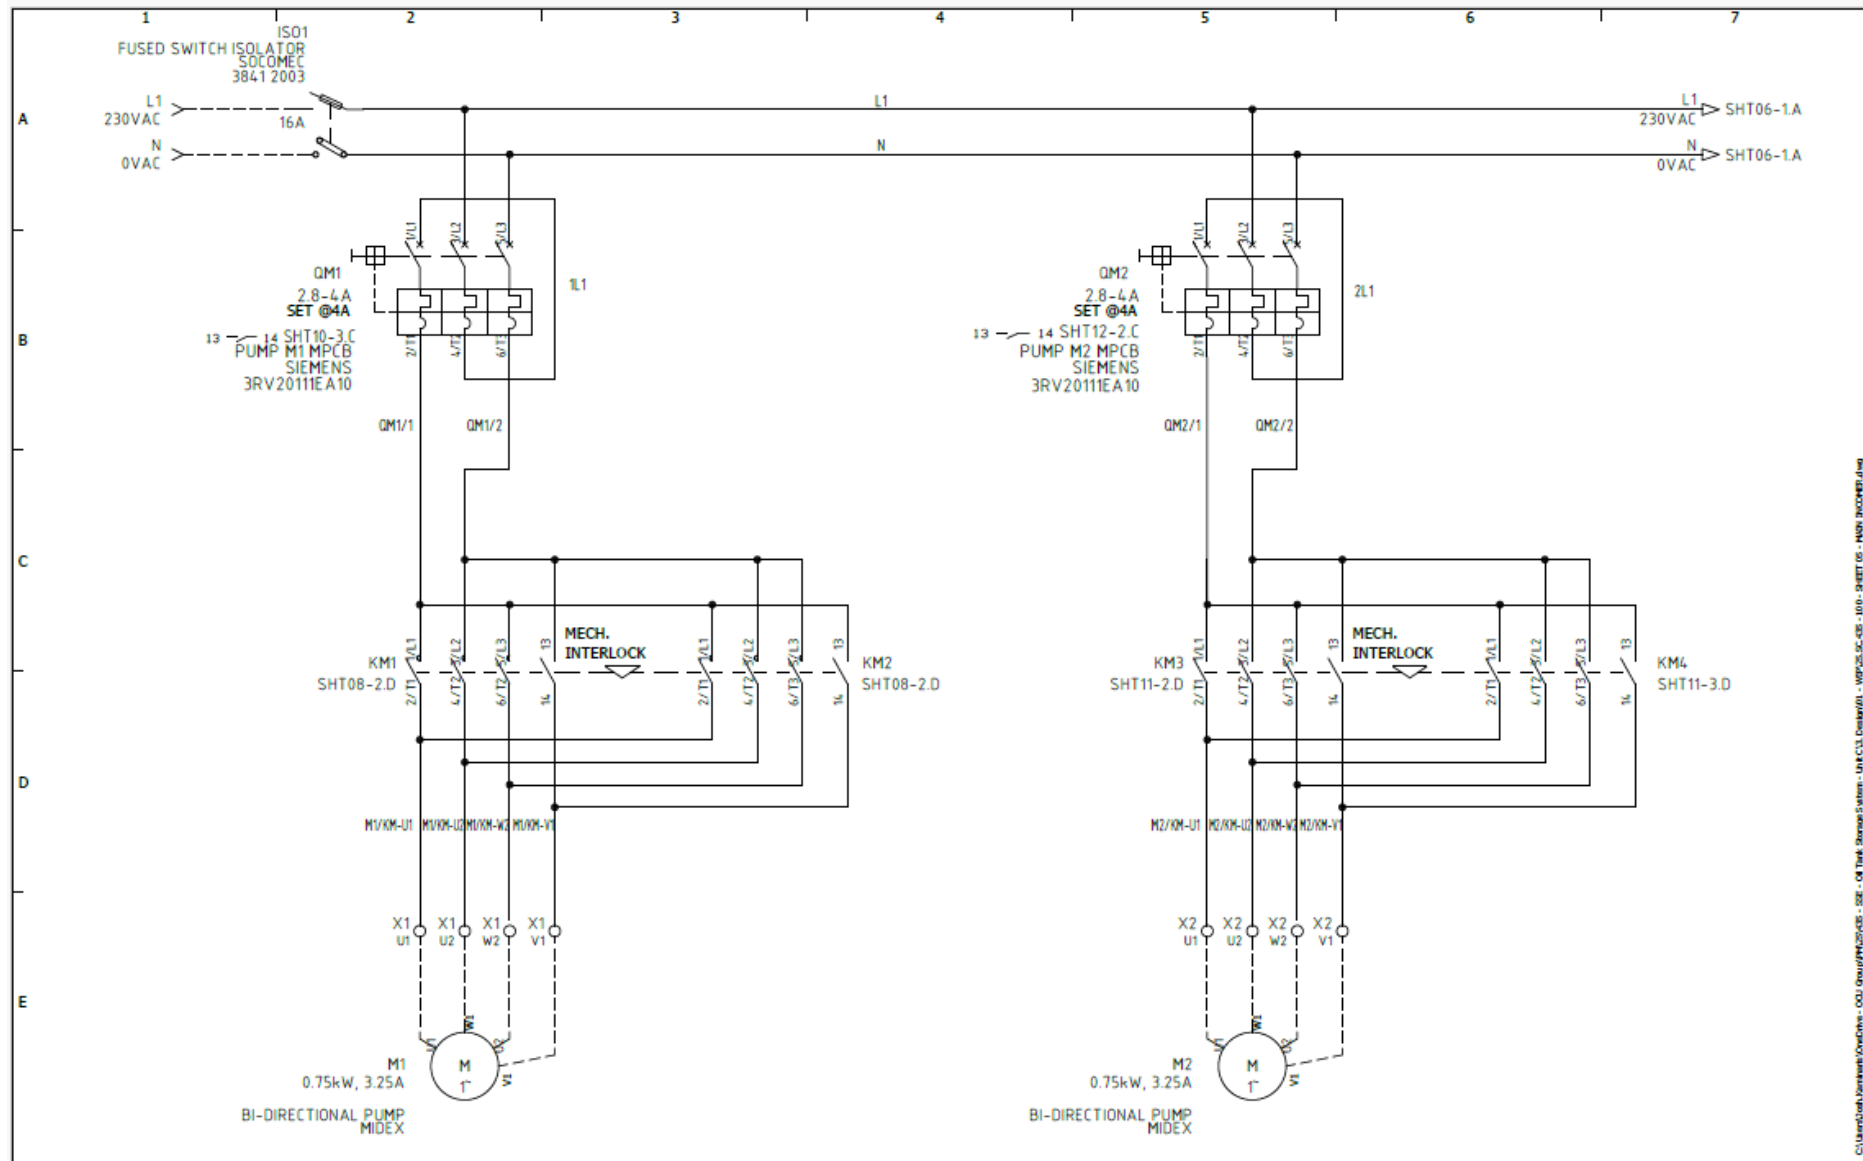

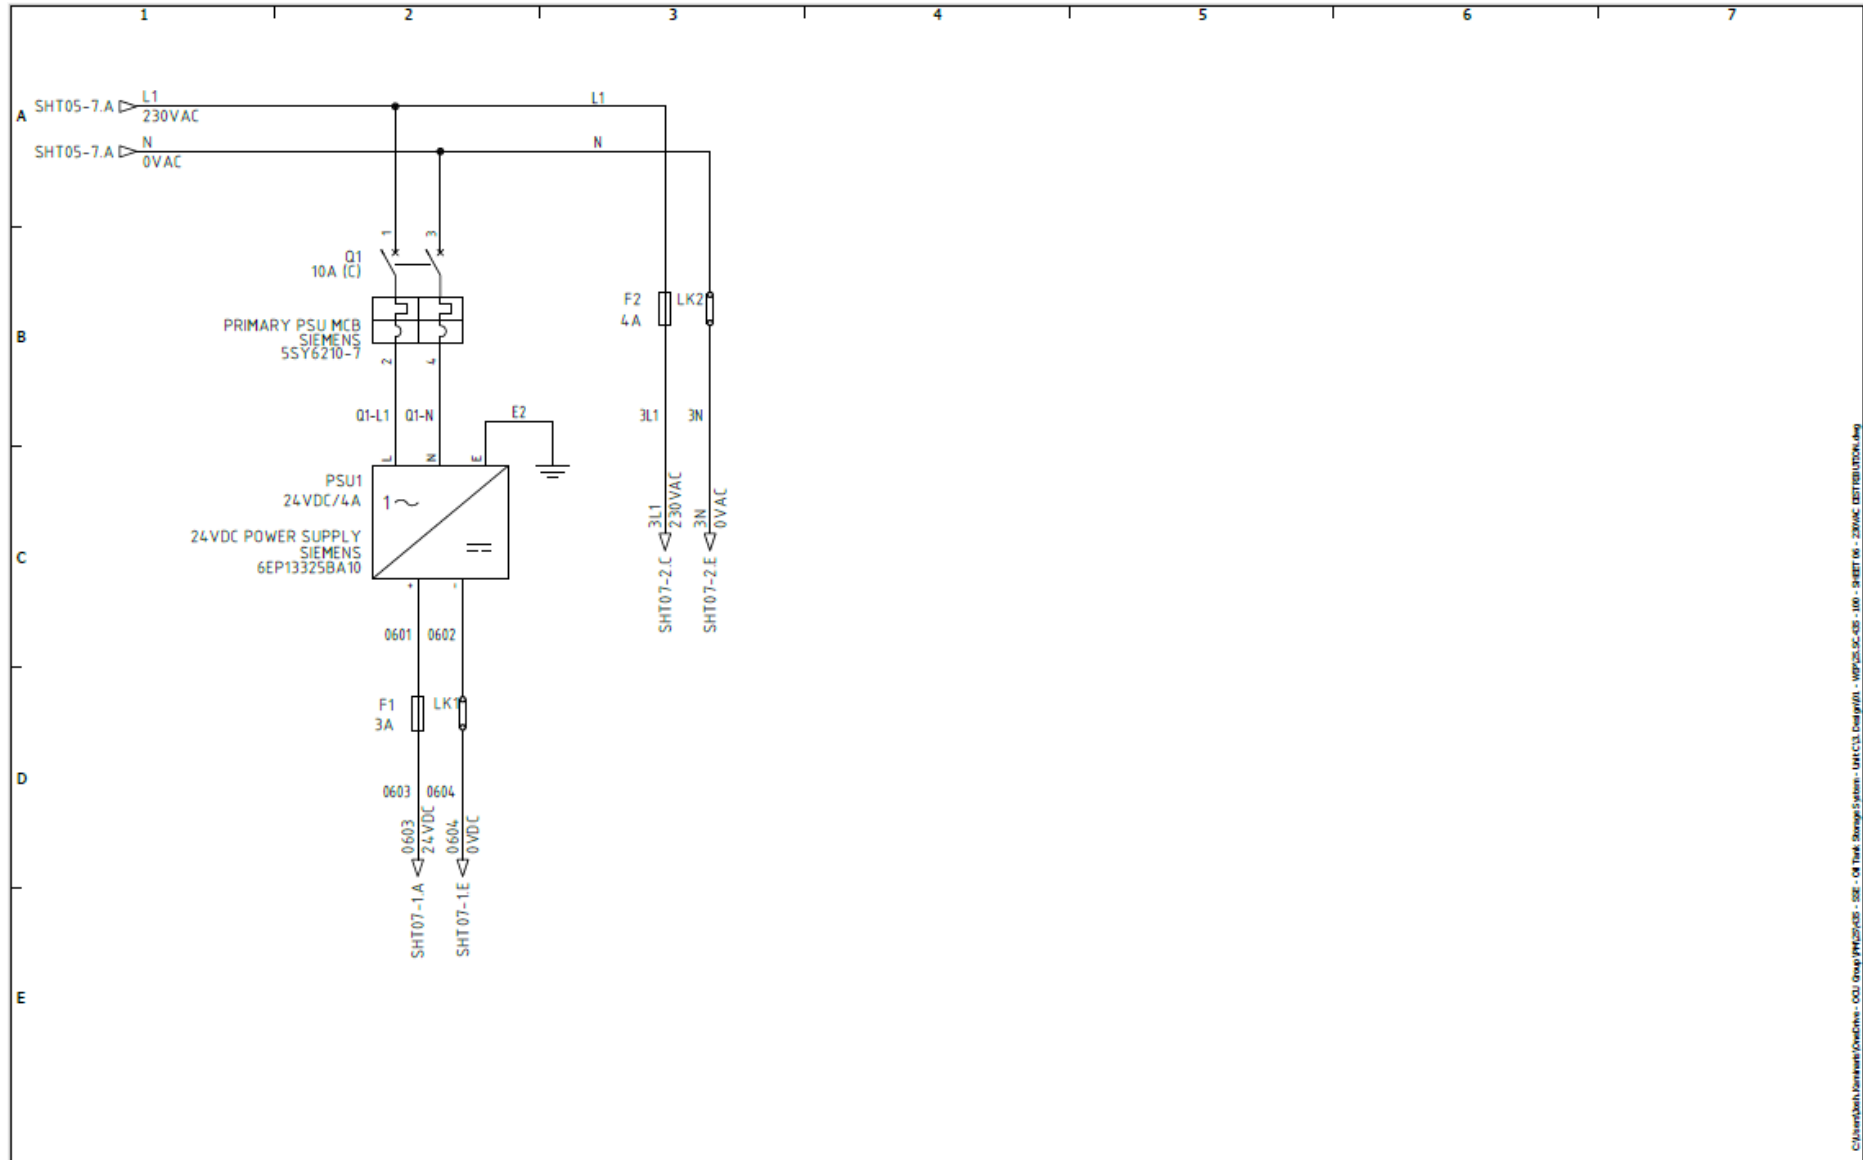

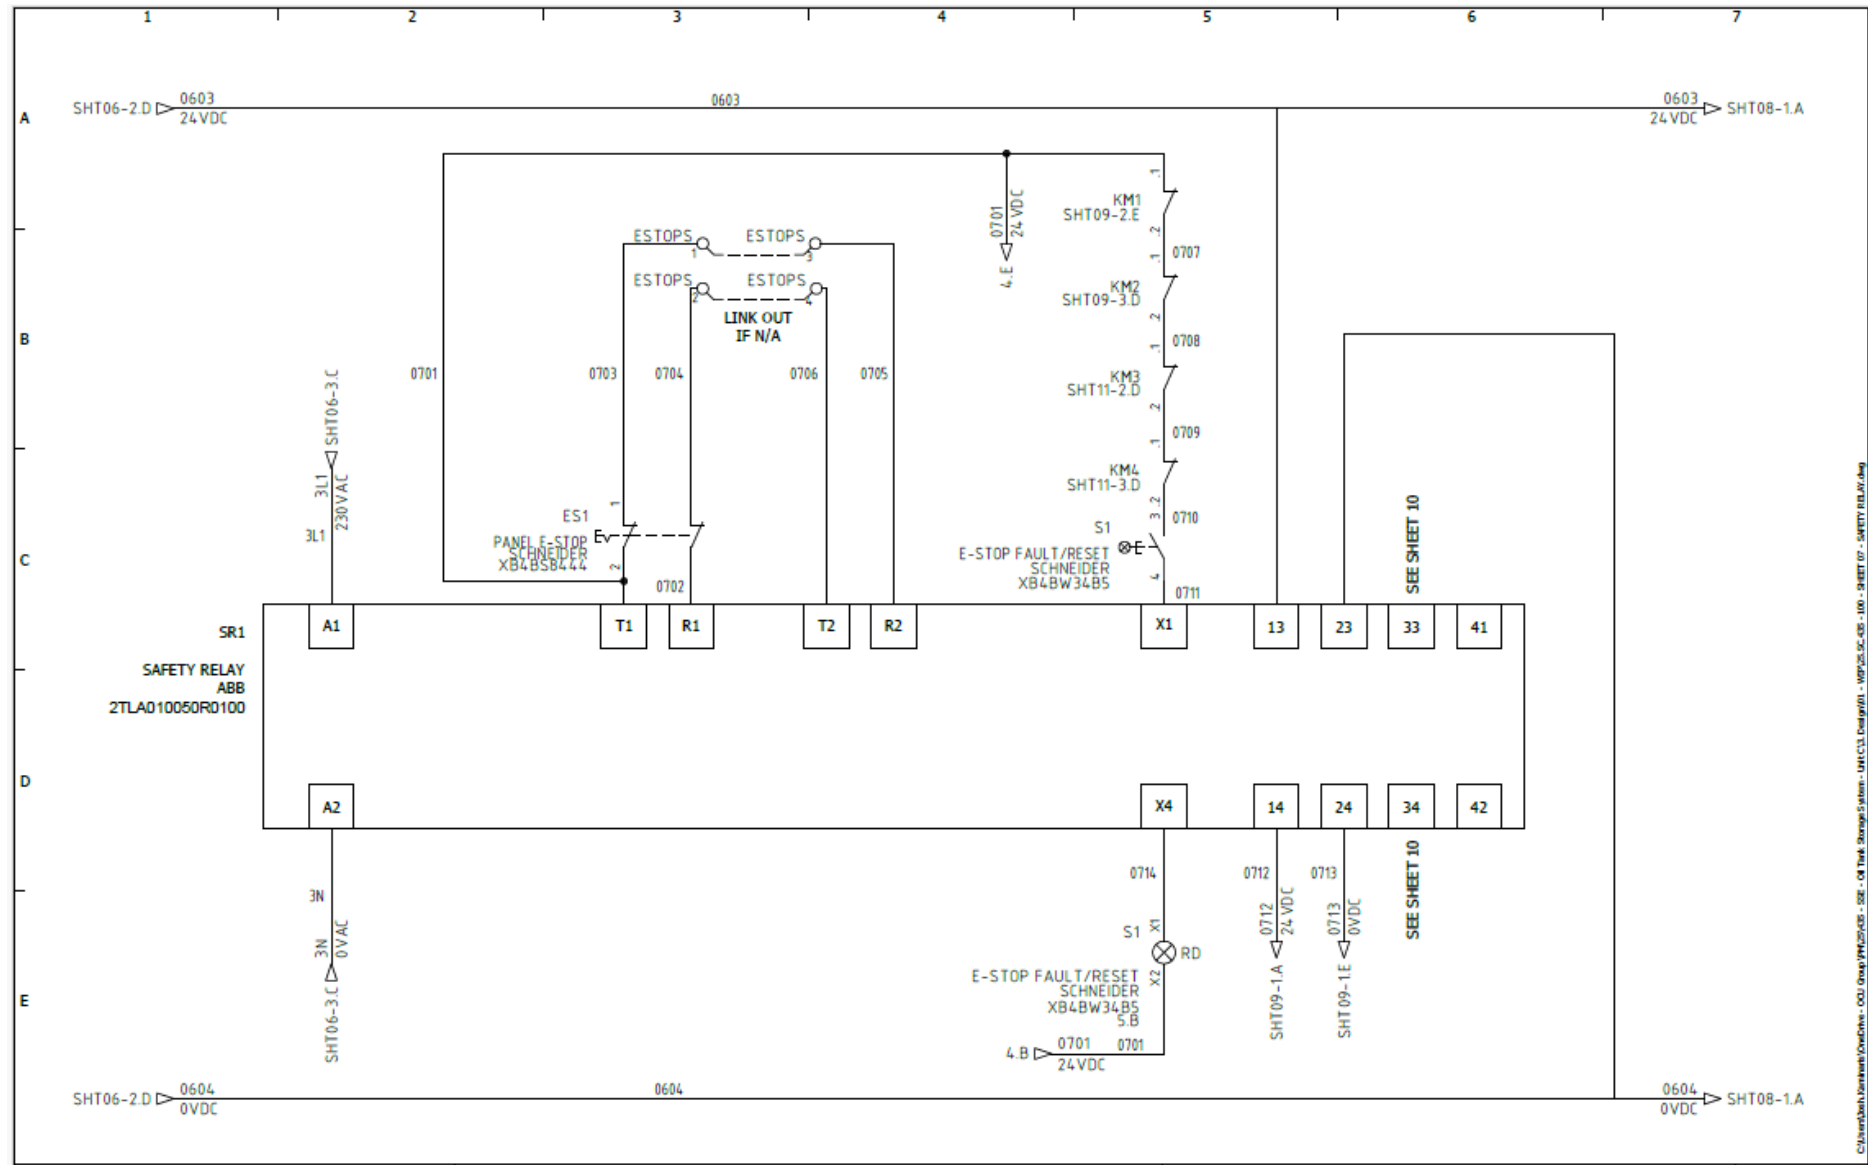

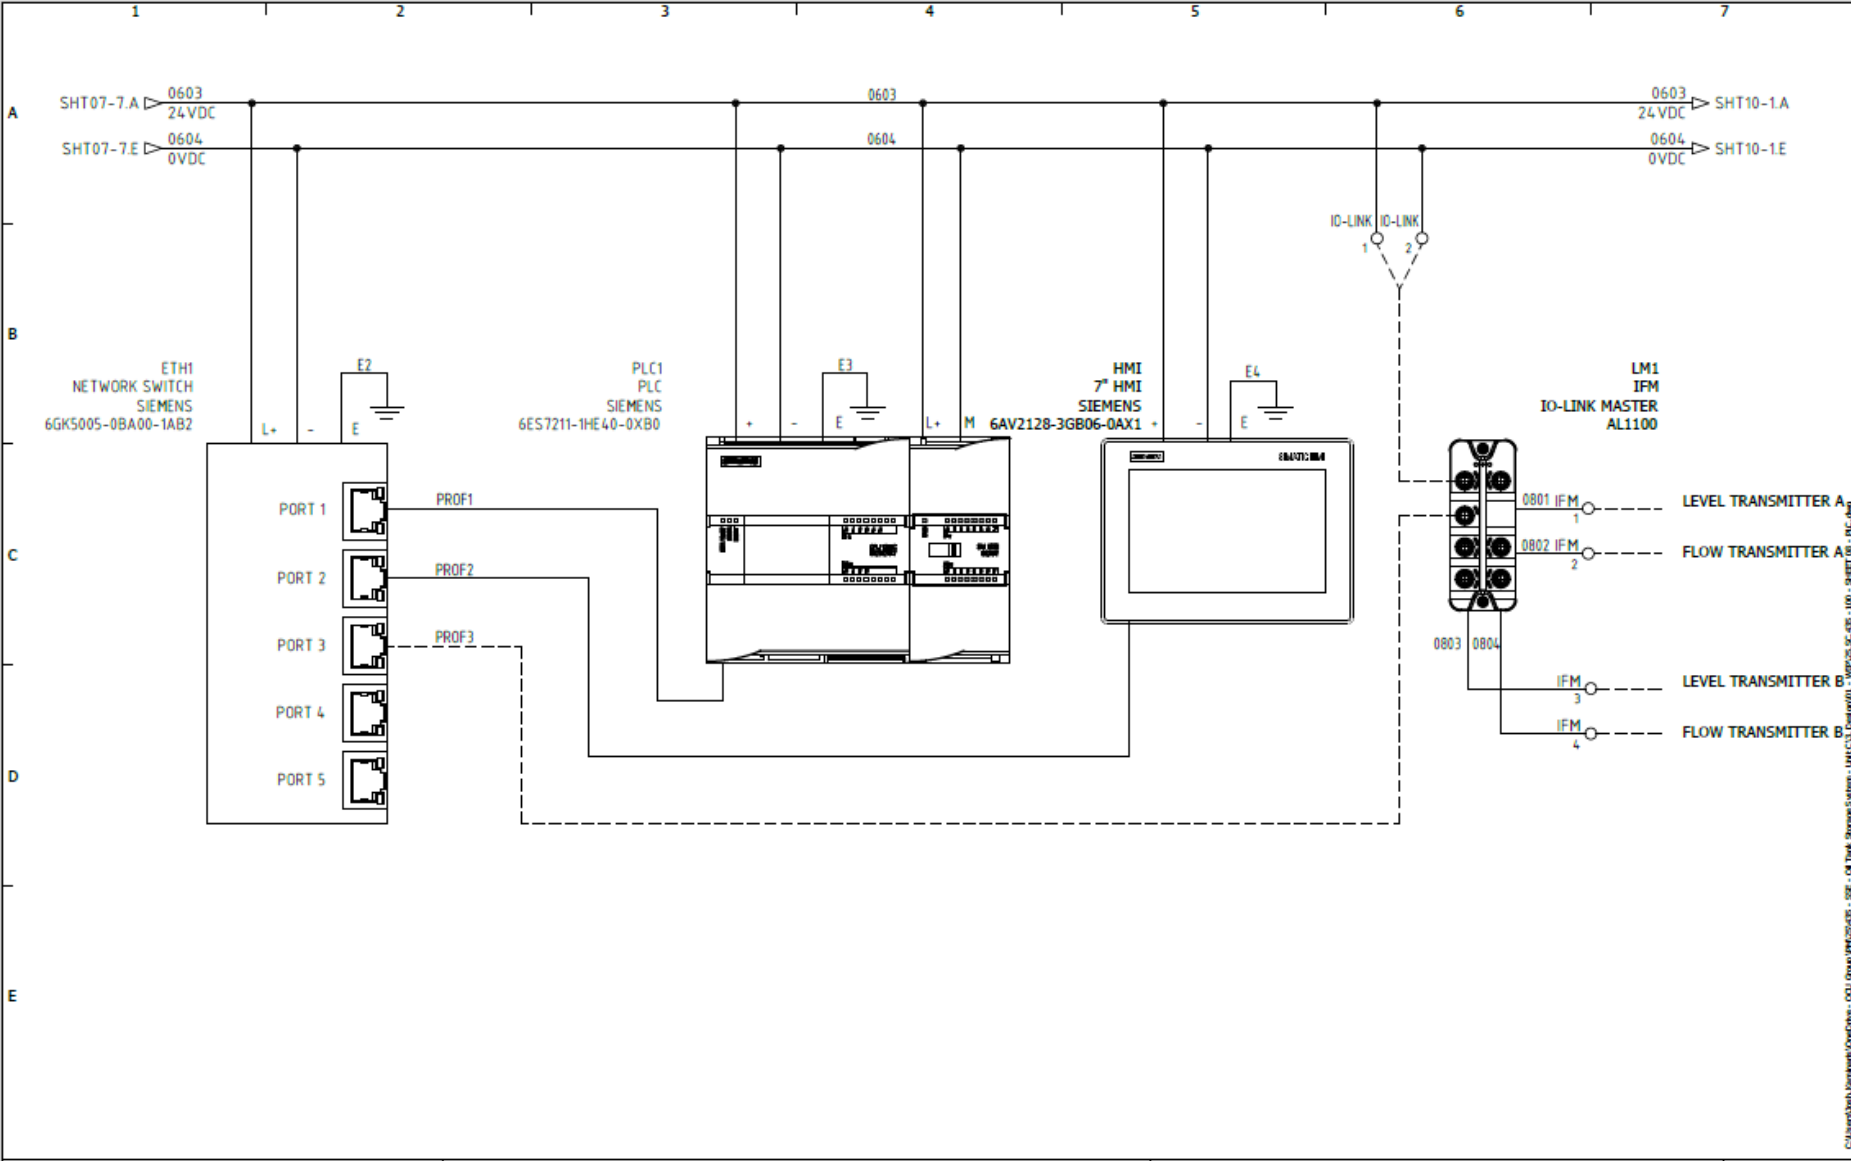


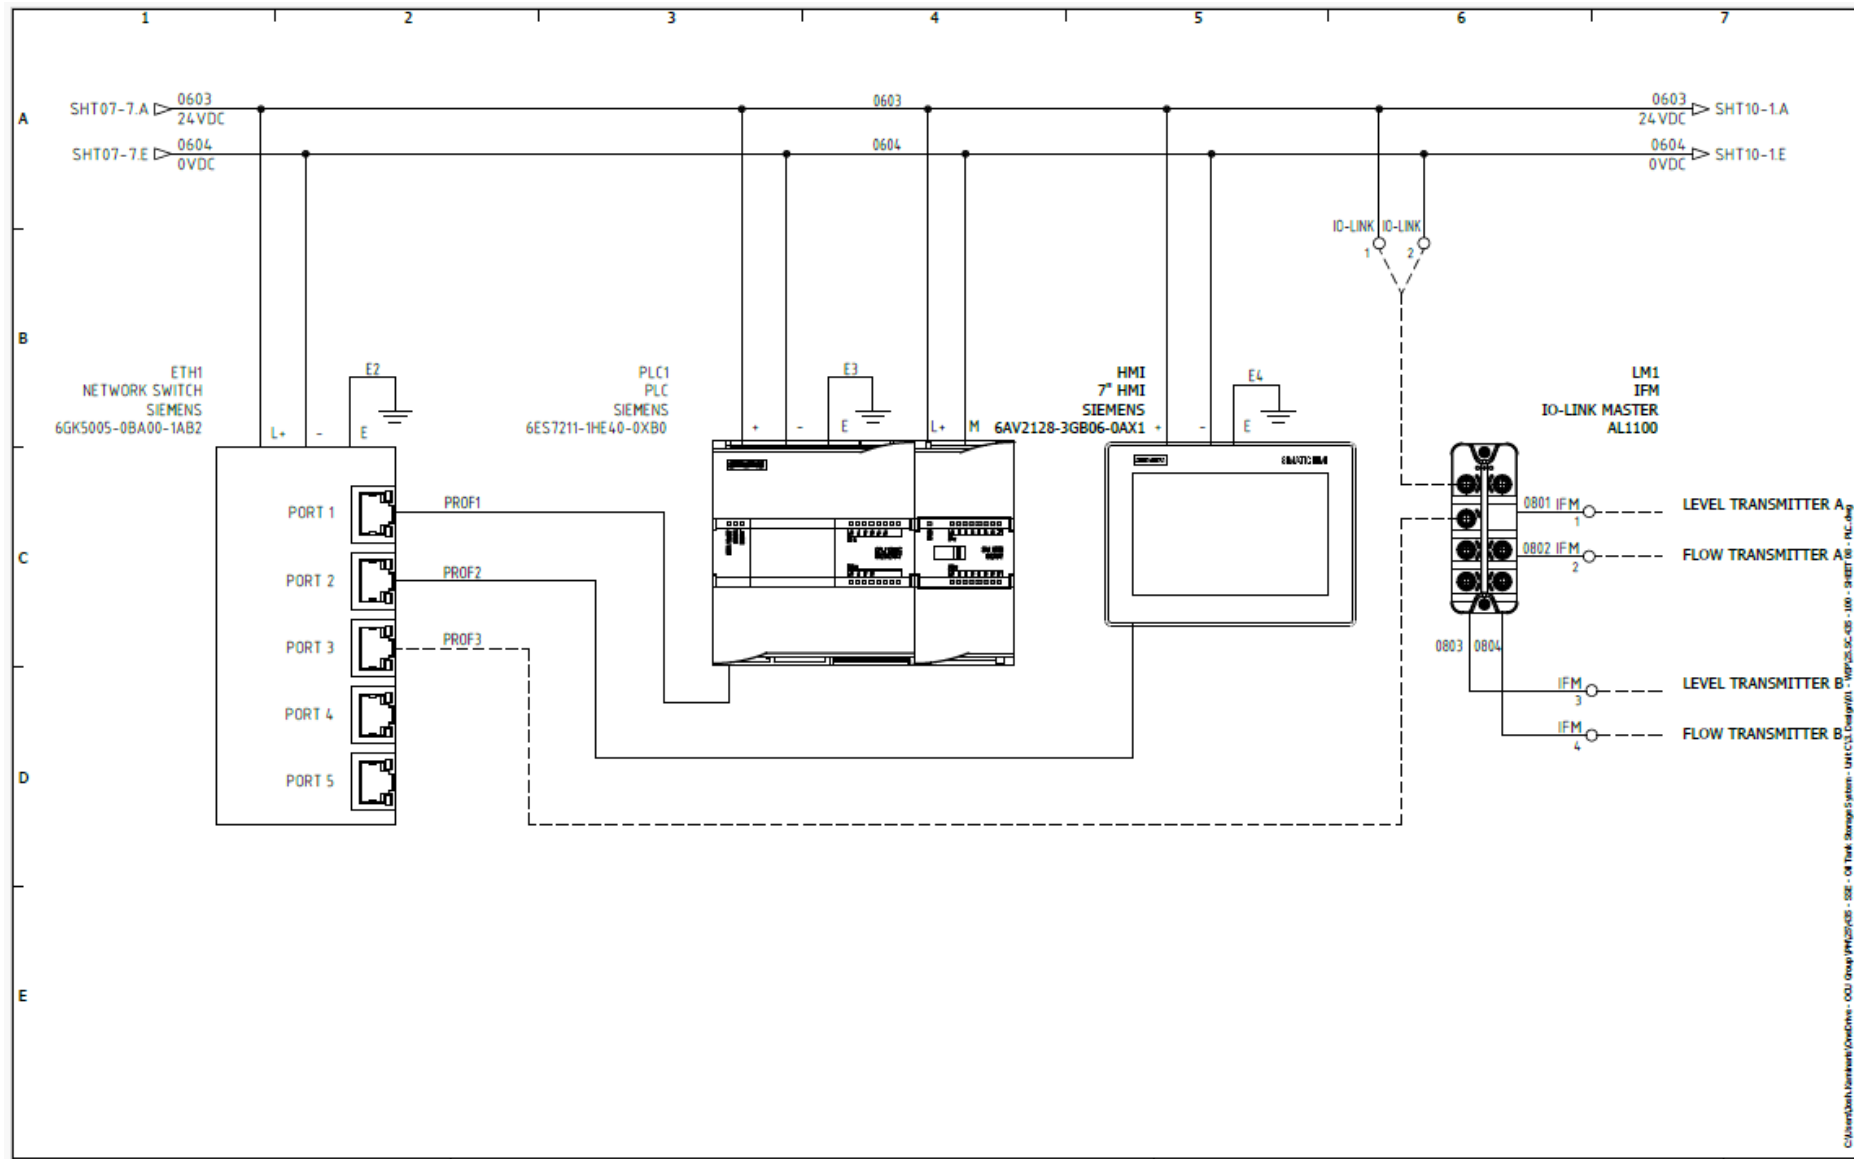









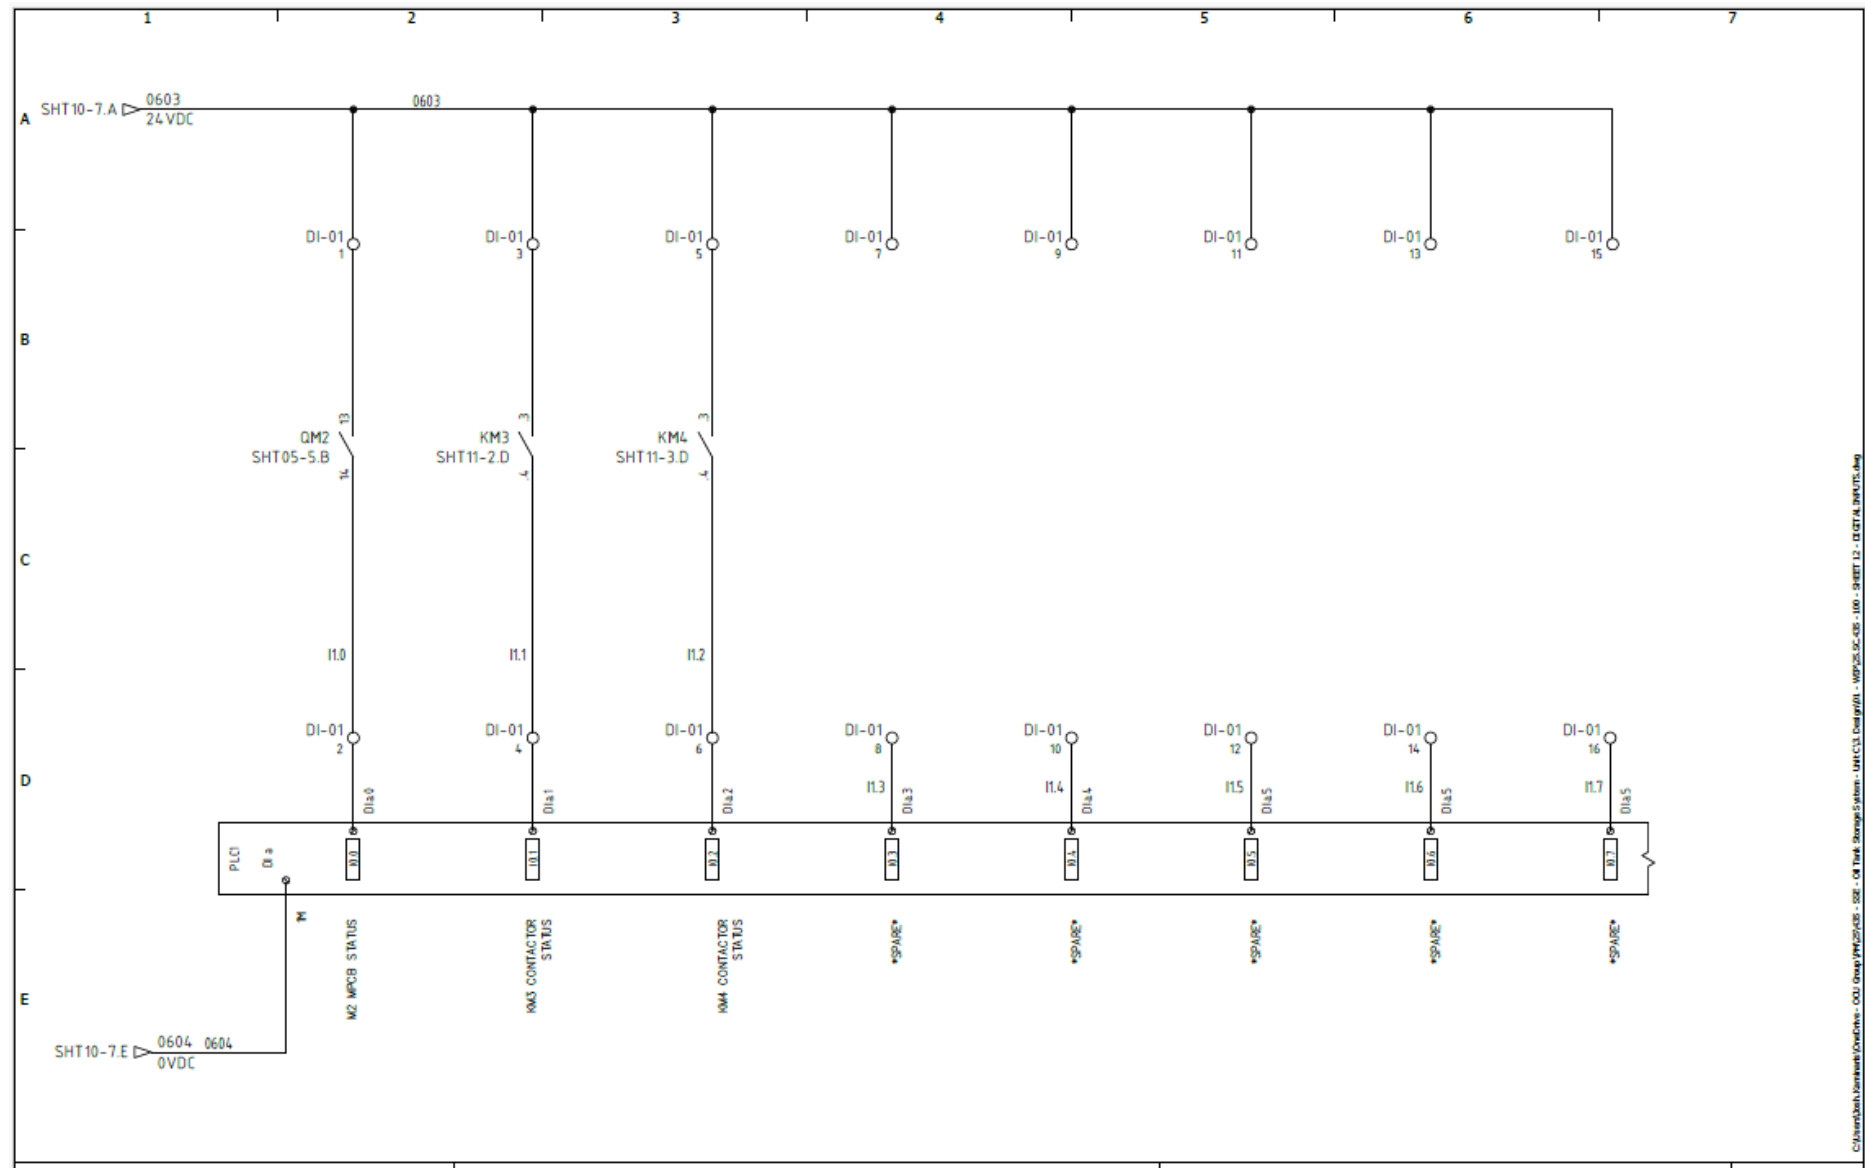

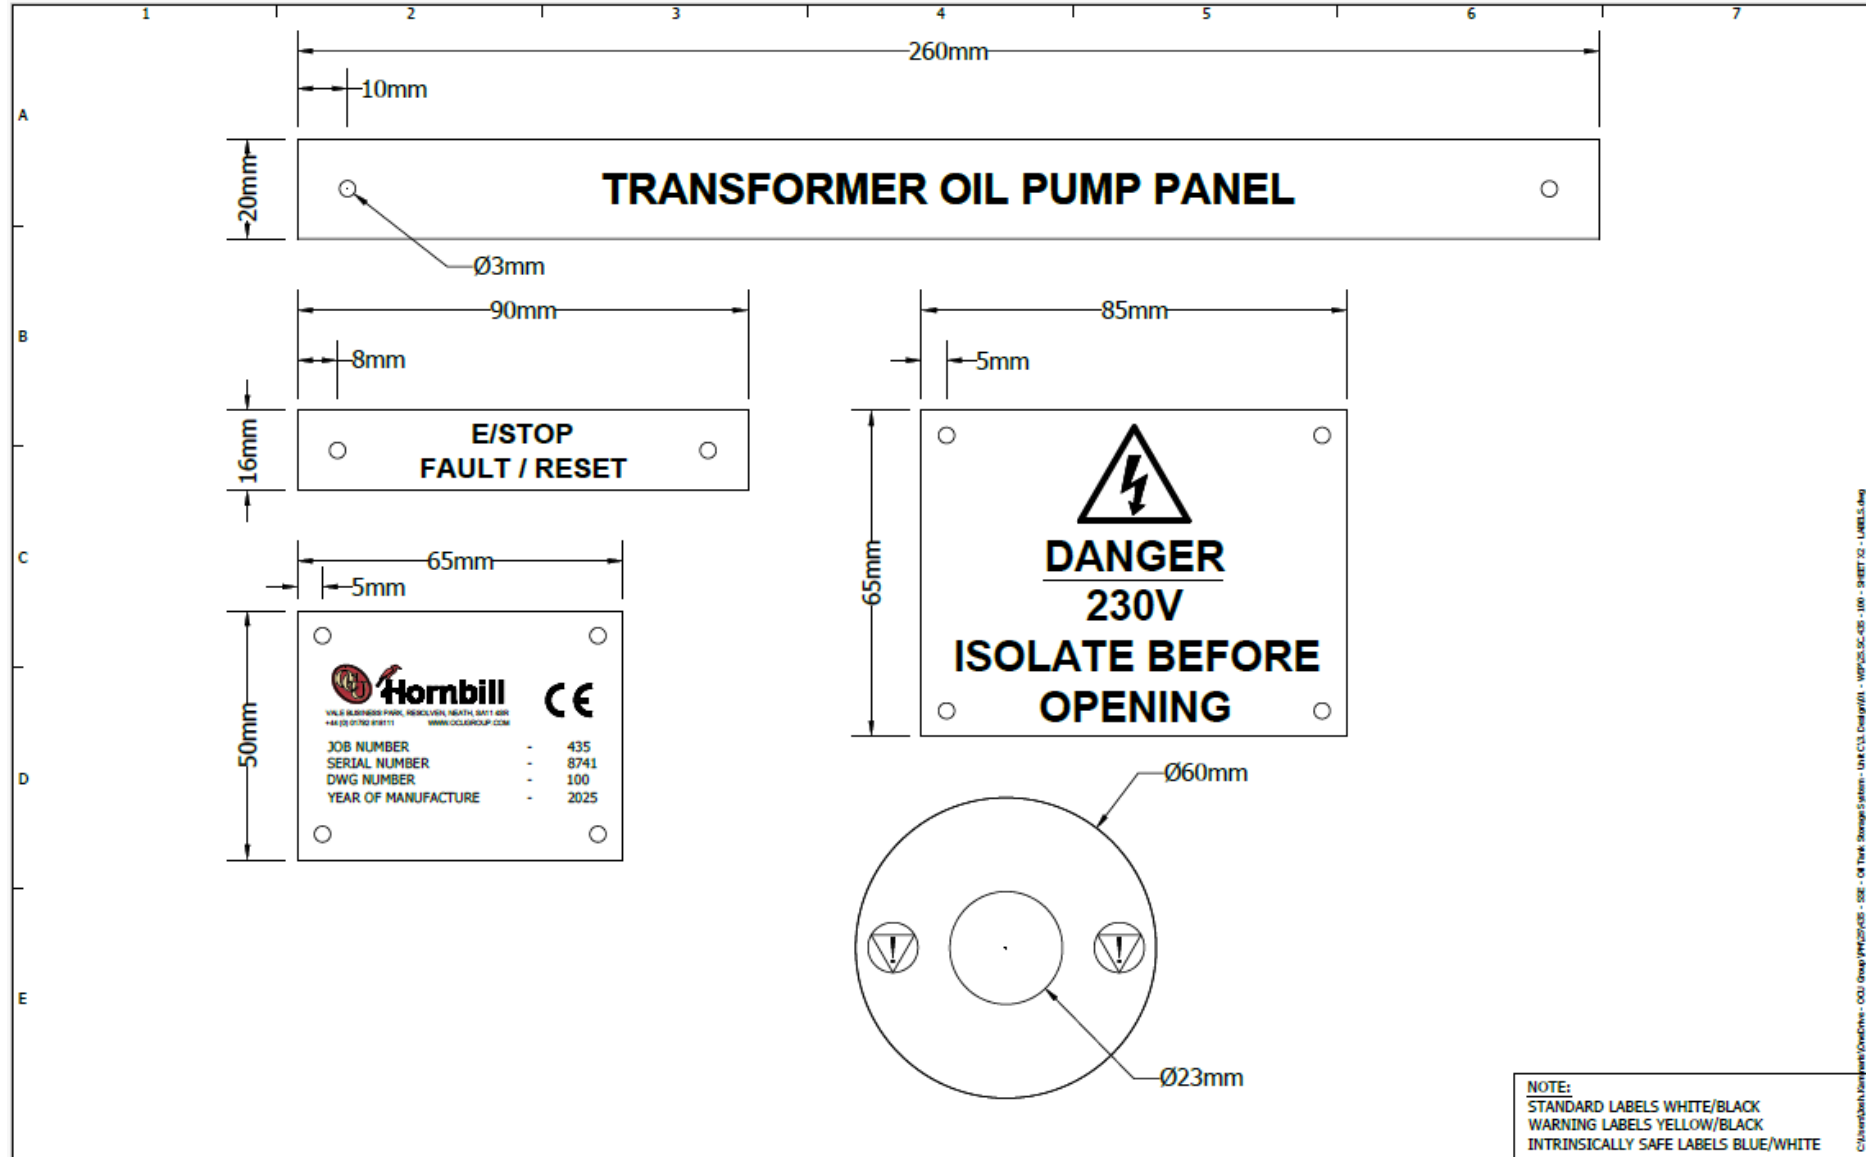

Appendix C — Tank Drawing (Metcraft A8442-8580)

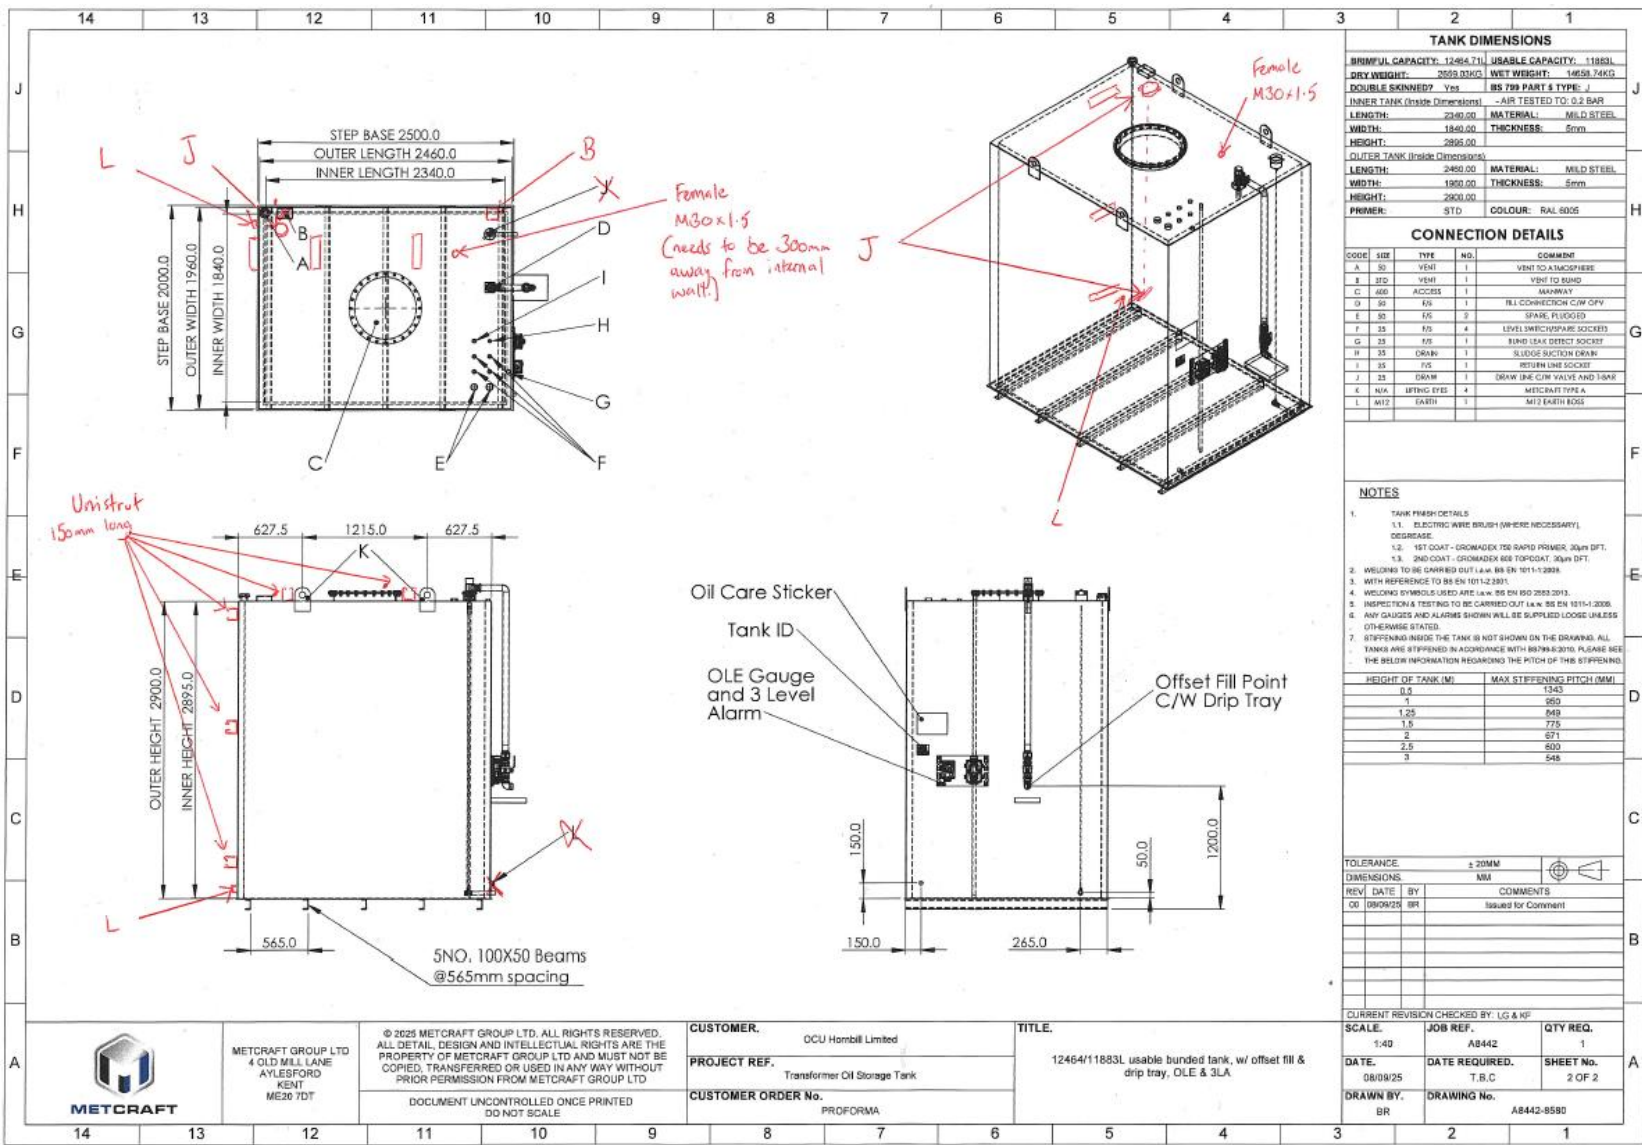


## Appendix D - Instrument Datasheet

### UGT213

#### Ultrasonic sensor

UGC008000K0G/IO-Link/US

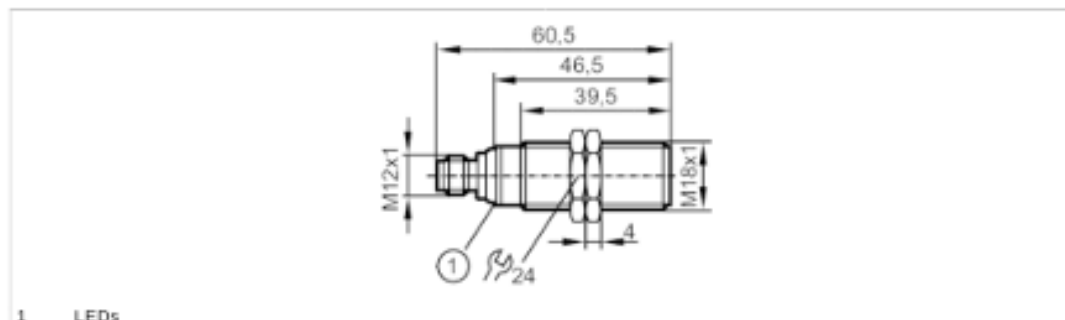


1 LEDs



| Product characteristics                              |                                                    |
|------------------------------------------------------|----------------------------------------------------|
| Electrical design                                    | PNP                                                |
| Output function                                      | normally open / normally closed; (parameterisable) |
| Sensing range [mm]                                   | 60...800; (Target: 200 x 200 mm)                   |
| Communication interface                              | IO-Link                                            |
| Housing                                              | threaded type                                      |
| Dimensions [mm]                                      | M18 x 1 / L = 60.5                                 |
| Electrical data                                      |                                                    |
| Operating voltage [V]                                | 10...30 DC; (*supply class 2* to cULus)            |
| Current consumption [mA]                             | < 35                                               |
| Protection class                                     | III                                                |
| Reverse polarity protection                          | yes                                                |
| Power-on delay time [s]                              | < 0.3                                              |
| Converter frequency [kHz]                            | 230                                                |
| Inputs / outputs                                     |                                                    |
| Number of inputs and outputs                         | Number of digital outputs: 1                       |
| Inputs                                               |                                                    |
| Synchronisation input                                | no                                                 |
| Multiplex input                                      | no                                                 |
| Outputs                                              |                                                    |
| Total number of outputs                              | 1                                                  |
| Electrical design                                    | PNP                                                |
| Number of digital outputs                            | 1                                                  |
| Output function                                      | normally open / normally closed; (parameterisable) |
| Max. voltage drop switching output DC [V]            | 2.2                                                |
| Permanent current rating of switching output DC [mA] | 100                                                |
| Switching frequency DC [Hz]                          | 5                                                  |
| Short-circuit protection                             | yes                                                |
| Overload protection                                  | yes                                                |

**SU8030****Ultrasonic flow meter**

SUR11xFCBRKG/US

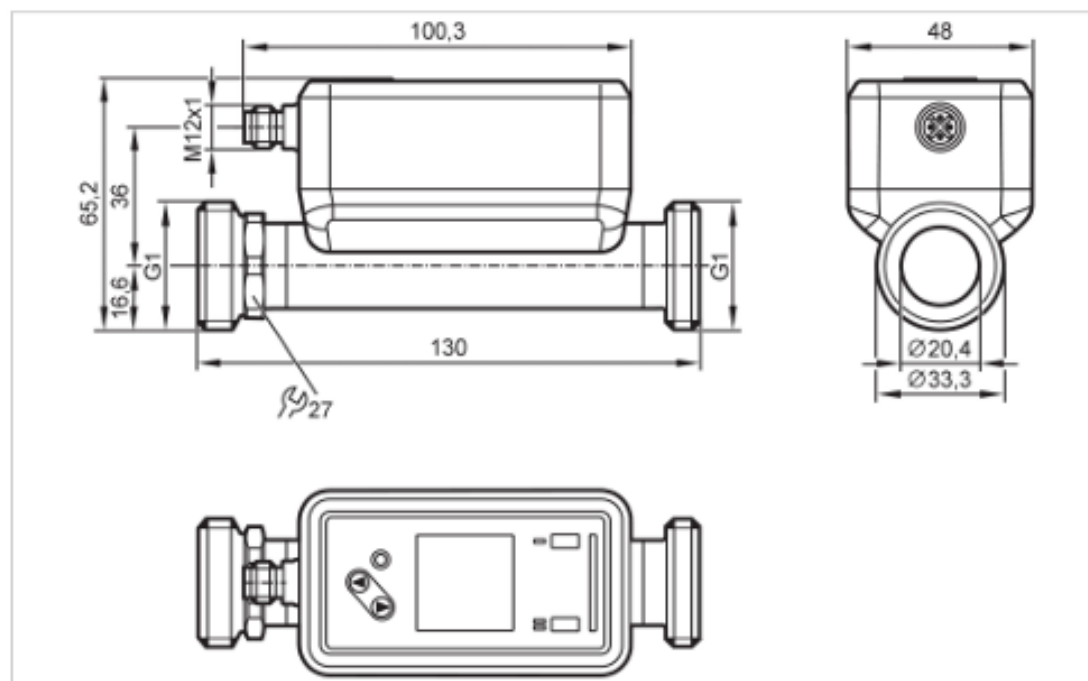

ACS IO-Link KTW/W270 Reg31

| Product characteristics     |                                                                                              |                            |                    |                  |
|-----------------------------|----------------------------------------------------------------------------------------------|----------------------------|--------------------|------------------|
| Measuring range             | 1...240 l/min                                                                                | 60...14400 l/h             | 0.051...12.202 m/s | 0.06...14.4 m³/h |
| Process connection          | threaded connection G 1 external thread DN25                                                 |                            |                    |                  |
| Application                 |                                                                                              |                            |                    |                  |
| Special feature             | Gold-plated contacts                                                                         |                            |                    |                  |
| Media                       | ultra-pure water; water; hydrous media; glycol solutions; oils; coolants                     |                            |                    |                  |
| Note on media               | hydrous media: for media with >10 % additives, the repeatability is the only available value |                            |                    |                  |
|                             | low-viscosity oils with viscosity: 7...40 mm²/s (40 °C)                                      |                            |                    |                  |
|                             | high-viscosity oils with viscosity: 30...68 mm²/s (40 °C)                                    |                            |                    |                  |
| Medium temperature          | [°C]                                                                                         | -20...100                  |                    |                  |
| Min. burst pressure         |                                                                                              | 150 bar                    | 15 MPa             |                  |
| Pressure rating             |                                                                                              | 100 bar                    | 10 MPa             |                  |
| Vacuum resistance           | [mbar]                                                                                       | -1000                      |                    |                  |
| Electrical data             |                                                                                              |                            |                    |                  |
| Operating voltage           | [V]                                                                                          | 18...32 DC; (to SELV/PELV) |                    |                  |
| Current consumption         | [mA]                                                                                         | < 75                       |                    |                  |
| Protection class            |                                                                                              | III                        |                    |                  |
| Reverse polarity protection |                                                                                              | yes                        |                    |                  |
| Power-on delay time         | [s]                                                                                          | 5                          |                    |                  |
| Measuring principle         |                                                                                              | ultrasonic                 |                    |                  |

Appendix E — Motor Datasheet

