

EXPERIMENTAL INVESTIGATION OF A COOK-OFF TEMPERATURE IN A HOT BARREL

Cover Page

Title: Assessment of Self Ignition Temperature (Cook-Off) in Hot Gun Barrels

SUMMARY

There are a number of current cook-off (self-ignition) tests including the UN series: small-scale cook-off bomb (SCB), slow cook-off, fast cook-off, electrically heated tube test; and one-dimensional time to explosion (ODTX) [1]. Safety under storage and decomposition parameters are the primary focus of these tests. As such the tests use either constant or increasing temperature profiles and, typically, are conducted on the composition or item packaged for transport and storage. The output of these tests is a determination of reaction type and violence as well as the thermal stability and decomposition rate of the material.

In 2012 Pitcher [2] experimented with the study of cook-off in gun barrels with particular emphasis of the temperature behaviours of the powder (Bulls Eye™) prior to cook-off. This work was presented as a poster exhibit at the International Ballistic Symposium in 2013 and recommended a number of further studies to obtain enhanced data. One suggestion was to conduct a number of experiments to introduce the 7.62mm cartridge case, modified with Bulls Eye propellant, into a 'hot' chamber rather than heating the simulated breech from room temperature until cook-off.

Azavedo [3] locally designed and produced an experimental rig to replicate a 'hot' gun chamber scenario. An MSc project was carried out in 2013 at Cranfield University to conduct these experiments and compare/contrast results to the previous project [2] with the aim of elucidating the effects of this modification.

In essence, what this paper seeks to do differently from previous studies is to simulate and extrapolate characteristics and behaviour of cook-off during an operational weapons firing situation with a view to establishing a time/temperature profile of the cook-off risk. For these experiments it was found that the cook-off temperature of Bulls Eye propellant in an instrumented 7.62mm cartridge case having the same heat transfer profile as that of the simulated barrel is between 151.4 and 153.4°C, with the reaction occurring less than 300s after round chambering. A time-temperature profile was developed, indicating the conditions in which 99.99% of cook-off reactions are predicted to occur.

ABSTRACT

The experimental investigations studying the effect of contact time/temperature to initiate cook-off using 7.62mm calibre cartridge cases (CC) have been conducted previously. These cartridges were filled with commercial off-the-shelf (COTS) double based (DB) propellant (Bulls Eye) and were loaded in a hot chamber. The thermal explosion temperature is of great significance to both weapon designers and safety inspectors as it provides the operational limit and safe operating temperature respectively. For the CC under test it was found that the cook-off temperatures of this propellant were encountered with the heat transfer profile of the simulated gun barrel between 151.4 and 153.4°C, with a reaction occurring in less than 300s after the round was chambered. Usefully, each experiment was found to be consistent and repeatable.

Key Words

Gun barrel, Cook-off, Barrel heating, propellant cook-off temperature

LIST OF ABBREVIATION

A	Propellant surface area
A_l	Propellant pre-exponential
B	Propellant activation energy
c_v	Specific Heat at constant volume
G	Heat gain in a system due to internal chemical reaction
L	Heat loss from a system through the boundaries
m	Propellant mass
n	No of samples
q	Heat transfer rate
S	Drop distance ($x_f - x_0$)
T_o	Ambient temperature at the boundary of the system
T_c	Cook-off temperature
V_f	Final velocity or closing velocity
V_o	Initial velocity
μ	Mean
σ	Standard deviation (SD)

1. INTRODUCTION

1.1 As the gun fires, the chamber surface temperature increases due to propellant burning. If one continues to fire at a high rate, the chamber surface temperature will continue to increase with every shot fired. During this event, if the propellant cartridge is loaded in the hot chamber, heat transfer from the chamber to propellant will take place. As the propellant heats up thermal decomposition reaction initiates and in the limit it could lead to thermal explosion or 'cook off'.

The rate at which the chamber heats up defines the operational limit of the weapon and its ammunition propellant. Therefore it is important for both the weapon designer and the safety inspector to understand and appreciate this thermal limitation while designing the weapon and defining the appropriate rate of fire and storage procedure. Currently operational and training limits for hot gun weapons are typically defined in terms of a set number of rounds in a specified time period. A further understanding of the cook-off mechanism will allow development of systems, particularly in platform mounted weapons, where the hot gun limits can be based on weapon temperature readings.

1.2 In the event of a chambered round in a hot gun the standard means of dealing with the situation is to leave the weapon on target, or in a known safe direction, for the duration of the safe cook-off wait-time. This necessitates remaining in contact with, and being exposed to, the target for the duration of the period. In a man-portable small arms situation this is likely to mean an increase in exposure while weapon arcs, in a larger platform significantly constrain manoeuvrability.

1.3 By furthering understanding of cook-off mechanisms, and therefore of the time and temperature limits of the reaction mechanism, such operational constraints can potentially be reduced. An increase in the temperature at which the weapon is considered to be in a too hot will allow greater flexibility in firing rate before overheating. An accurate understanding of the cook-off reaction times for the weapon at a specific temperature can reduce the safe wait-time and allow manoeuvring sooner. In addition, understanding the minimum time before a reaction occurs may allow action to be taken, such as ejecting the round to prevent the reaction occurring.

2. PROPELLANT COOK-OFF IN HOT GUNS

2.1 In a system where there is a cook-off event, it arises due to an acceleration of the heat released by the internal decomposition reaction that is greater than the degree of cooling. This may be due to the weapon being hot which causes a high temperature difference and induces rapid heat gain within the round, or alternatively low levels of heat loss preventing the reaction taking place.

2.2 In a gun system heat is lost from the system at a rate which is dependent on the conditions at the boundary of the system. Each system can be considered to be made up of two curves representing heat generation (G) and heat loss (L) which are independent but interact to form the system heat balance and the thermal behaviour of the system can be described by equation 1 [4] below.

$$mc_v \frac{dT}{dt} = G - L \quad \text{Equation 1}$$

While the rate of heat being generated by the system is an exponential function, governed by the Arrhenius equation, the heat loss from the system is a linear function based on the boundary conditions. When combined, the balance between G and L can be plotted Figure 1.

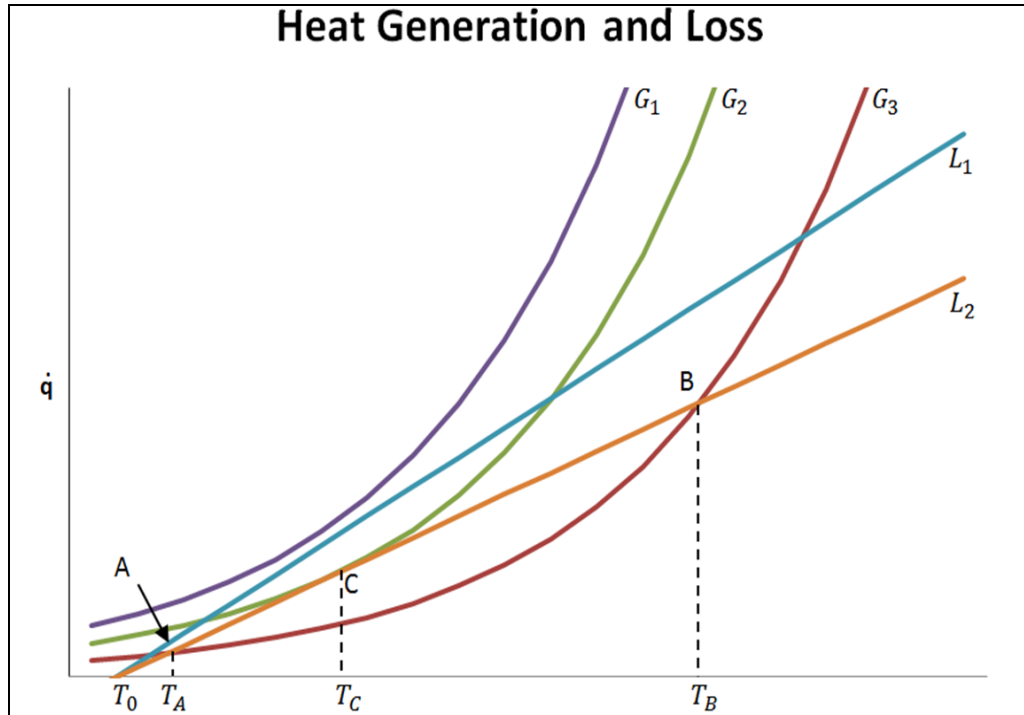


Figure 1: Heat generation (G) and loss (L)

2.3 The gradient of 'L' is set by the heat transfer properties of the boundary while the x-intercept (T_0) is the ambient temperature at the boundary of the system. From this if the system is at a higher temperature than ' T_0 ' there is a net heat loss from the system, however if the system temperature is lower than ' T_0 ' then 'L' will be negative and there will be a net heat flow into the system.

2.4 From the Figure 1, it can be seen that for heat curves ' G_3 ' and ' L_2 ' a stable region exists below ' T_B ' in which temperatures will tend to ' T_A '. For a small temperature increase above T_A , heat loss 'L' is greater than heat gain 'G' and therefore the temperature will decrease to T_A . Similarly, temperatures below T_A will increase as heat gain G is greater than heat loss L. At temperatures above T_B there exists an unstable state where heat gain G always exceeds heat loss L and thermal runaway commences.

2.5 For systems where L is minimal when compared to G such as with G_1 and L_2 , there is no capacity for a stable condition to exist and the system will always undergo thermal runaway. As L decreases further as compared to G there exists a situation where the system will be thermally stable at only one temperature, as can

be seen with G_2 and L_2 , and is unable to withstand any temperature increase without undergoing thermal runaway.

3. Cook-Off Situation

3.1 In a weapon cook-off situation T_c is the barrel temperature and therefore L is for a significant portion of the temperature profile. This has the effect of reducing the stable region between T_A and T_B to the point where there is no overlap between G and L . Under these conditions the system is always in a state of thermal runaway and the system temperature is being accelerated by the external conditions, as given below in equation 2.

$$mc_v \frac{dT_p}{dt} = A_1 e^{\frac{-B}{T_p}} - hA(T_p - T_b) \quad \text{thus if } L \text{ is negative then } T_b > T_p, \text{ Equation 2}$$

3.2 Cook-off reaction occurs due to a temperature increase causing an acceleration of the internal decomposition reaction that exceeds the rate of heat loss. This may be due to the hot weapon causing a high temperature difference between barrel and powder so that heat gain within the round exceeds heat loss.

4. HOT CHAMBER TESTING APPARATUS

4.1 For the experiments, a unique test apparatus was designed to simulate a gun barrel and cartridge in a cook-off situation. In order to achieve this the test apparatus was designed to heat a chamber with 175W heater elements, insert a cartridge remotely filled with propellant and manage the cook-off reaction without localised damage. The apparatus, shown in Figures 2 and 3, was also designed to record the barrel and powder centre thermal profiles while the reaction was taking place.

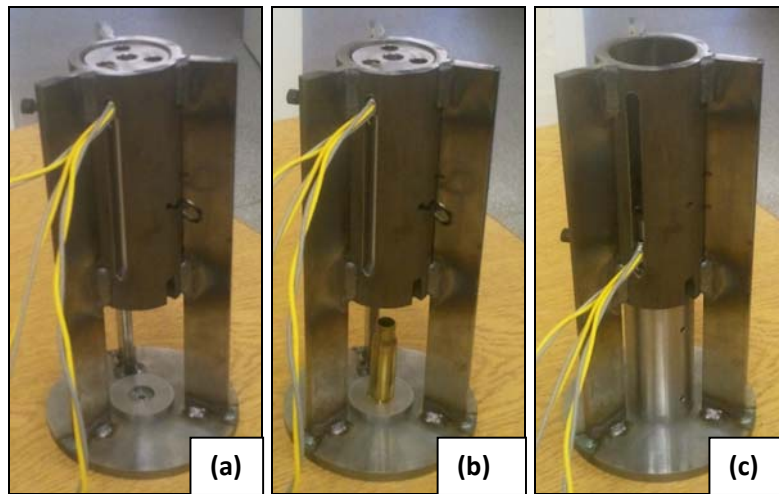


Figure 2. Test apparatus (a) unloaded, (b) loaded and (c) activated.

selected to gain reliability through reduced complexity. This had the added advantage of reducing manufacturing complications, critical tolerances, and the number of parts. The final design has a drop of 70mm and, assuming $g = 9.81\text{ms}^{-2}$, a freefall closing velocity from Equation 3 of 1.3ms^{-1}

$$v_f^2 = v_o^2 + 2a(x_f - x_o) \quad \text{Equation 3-Acceleration over distance}$$

4.4 The experiments conducted were broadly grouped into temperature ranges of the barrel at commencement to provide the basis for comparison and statistical analysis (Figure 4). A graphical representation of the data obtained provides an indication of the overall trend as well as the consistency of the experimental results over the trial. Basic statistical analysis (mean and standard deviation) was used to assess the consistency of the data and to compare parameter behaviour with variation in temperature.

4.5 As a result of the initial ignition test which indicated a temperature of ignition in the vicinity of 160°C , the final temperature ranges for tests were selected as 160°C , 170°C , 180°C , 190°C , 200°C , 220°C and 240°C . These were the chamber temperatures at which the barrel was dropped onto the cartridge and is defined as (1) “chambering” in Figure 4.

5. EXPERIMENTAL RESULTS

5.1 The temperatures of both the barrel and propellant at thermal explosion are plotted in Figure 5 following commencement of the thermal explosion reaction along with the event times. The “green” curve represents mean propellant thermal explosion temperature, while the “red-brick” colour represents the mean barrel temperature. From the graph it can be seen that as the mean barrel temperature increases, the time to thermal explosion reduces. Similarly, with the increase in barrel temperature, the heat transfer rate between barrel and propellant is such that the thermal

Description of events shown in Figure 4 are given below:

Chambering Point – The commencement point of the trial and nominally the zero time point. Identified as the onset of the initial barrel temperature change after being dropped onto the cartridge. In a weapon firing scenario this is the point where a fresh round is chambered and heat transfer commences.

Start Temperature (Barrel): This is the initial barrel temperature at the chambering point and provides an indication of the heat available for the follow on reactions.

Start Temperature (Powder) - This is the initial powder centre temperature at the chambering point. Nominally this will be the magazine or ambient temperature of the weapon system.

Delay - The period of time between chambering and the commencement of powder centre temperature rise; this also indicates the time for heat transfer to reach the centre of the powder.

Slump - After chambering the barrel temperature slumps by a certain amount before increasing again until a steady state condition is reached. The slump is measured as the Start Temperature (Barrel) minus the first minimum after chambering.

Rise Rate - The initial, near linear, powder temperature rise expressed in degrees Celsius per minute. Measured from just after commencement of rise until the temperature change rate begins to slow or a cook-off reaction occurs.

Peak (Barrel) - After increasing to a steady state condition the barrel temperature again begins to decline. The peak reached is measured as the maximum barrel temperature between the slump and the end of the experiment recording.

Peak (Powder) - The maximum temperature the powder centre reaches during the experiment.

Cook-Off Time - The time from chambering to the commencement of the cook-off reaction, identified by a sharp change in rate of change of temperature (in seconds).

Cook-Off Temp (Barrel) - The temperature at the commencement of the cook-off reaction.

Cook-Off Temp (Propellant) - The temperature at the commencement of the cook-off reaction.

decomposition initiates earlier and this is a significant observation. From the graph, it can be seen that between the temperature range of 180 and 190°C, the propellant centre temperature decreases with the increase in barrel temperature for thermal explosion to occur. Therefore 180°C can be defined as the safe limit for this propellant. From the “blue” curve it can be seen that it takes around 150-240 seconds to thermal explosion at this range.

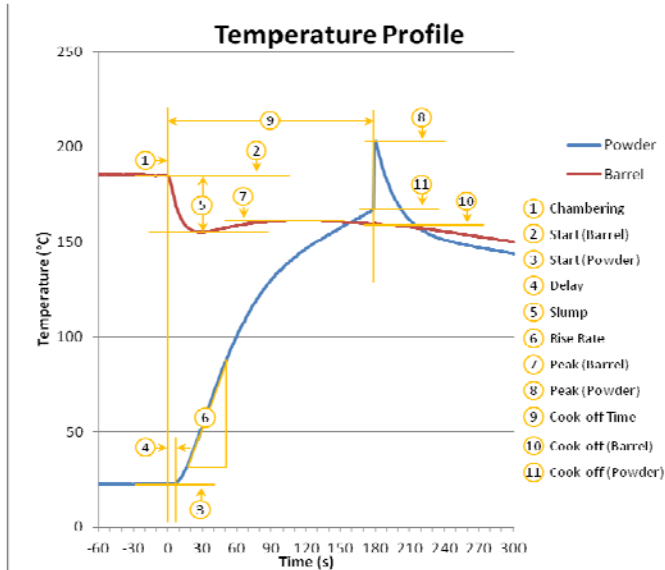


Figure 4. Characteristic curve key features.

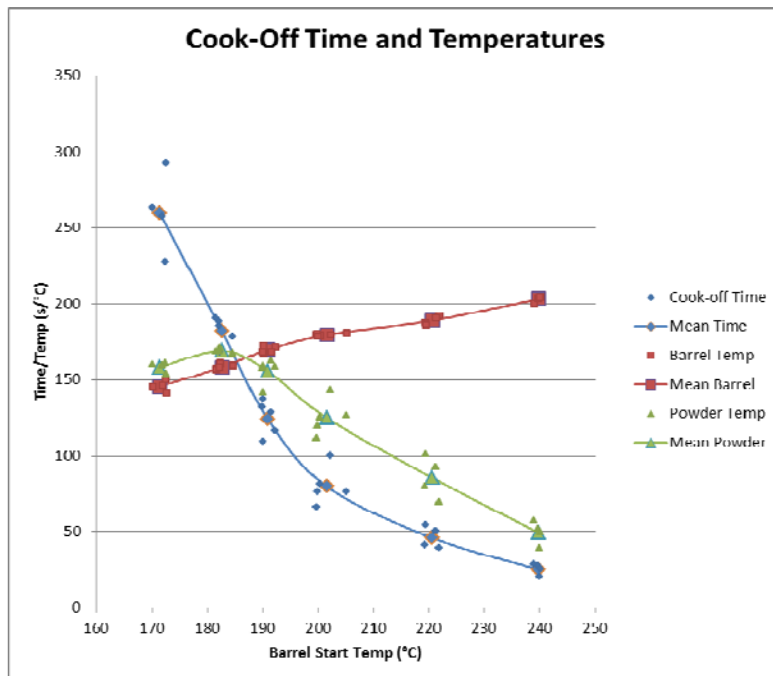


Figure 5. Cook-off temperatures and time (plotted on the same axes).

5.2 As a means of establishing the safe times associated with a cook-off situation it was necessary to determine the possible times at which a cook-off reaction will occur. A suitable method was to calculate upper and lower limits for each temperature range where cook-off was observed. For the purposes of this experiment a range of 3.89σ was used, which equates to 99.99% of possible results and intervals were determined as shown in Table 1.

Temp Range	Mean (μ) Temp	μ Time	σ Time	n	Lower Limit	Upper Limit	Interval
170	171.4	259.75	23.08	4	169.95	349.54	179.59
180	182.6	181.80	8.01	5	150.63	212.96	62.32
190	190.8	124.40	10.37	5	84.07	164.72	80.65
200	201.5	79.80	11.21	5	36.17	123.43	87.26
220	220.5	46.00	6.20	4	21.86	70.14	48.28
240	239.8	25.00	3.08	4	13.00	36.99	23.98

Table 1. Time to cook-off 3.890592σ (99.99% of occurrences).

5.3 From the experiments it was observed that the cook-off reaction occurred when initial barrel temperatures between 169.6 and 170.1°C. These start temperatures correspond to peak barrel temperatures after activation of between 149.2 and 151.0°C, as well as propellant temperatures of between 151.4 and 153.5°C. It was noted that the propellant temperatures surrounding the onset of cook-off are higher than the barrel temperature. This is expected due to the additional heat generated by the chemical reaction of the propellant decomposing. A plot of the relative powder temperature against the peak barrel temperature over the 160 to 180°C temperature ranges is shown in Figure 6. It can also be seen that for barrel temperatures above ~146°C the chemical reaction causes the propellant centre temperature to exceed that of the peak barrel temperature. At temperatures below ~146°C the heat generated by the chemical reaction is less than the heat loss through the propellant; whereas the chemically generated heat above this threshold increases the powder temperature above the temperature of the metal thus transferring heat into the cartridge and driving the reaction.

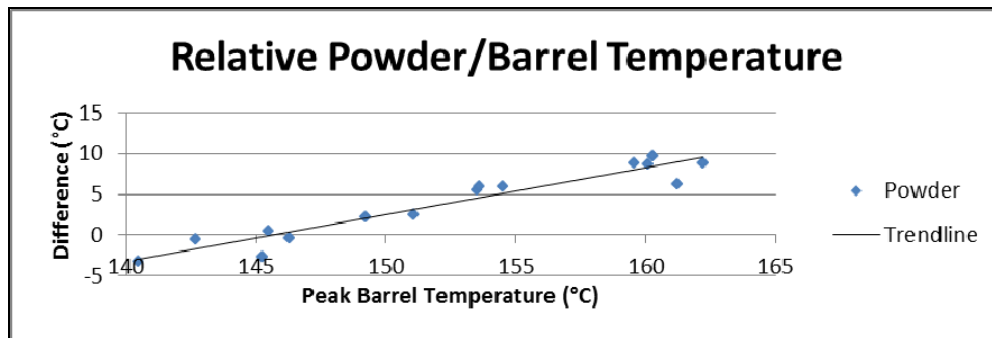


Figure 6. Relative powder to barrel temperatures.

5.6 Consequently, below this threshold the heat transferred and generated from the internal chemical reactions was not enough to exceed the heat that could be conducted back through the casing and barrel. Although the propellant centre temperature exceeded that of the surrounding barrel, a cook-off reaction does not occur. Figure 7 shows that on heating the powder temperature rises to a plateau where the heat internally generated is being dissipated and equilibrium is established. Any increase in temperature above this level will have a corresponding increase in chemically produced heat and a cook-off reaction will occur. For this series of experiments this was observed to be between 151.4°C and 153.5°C.

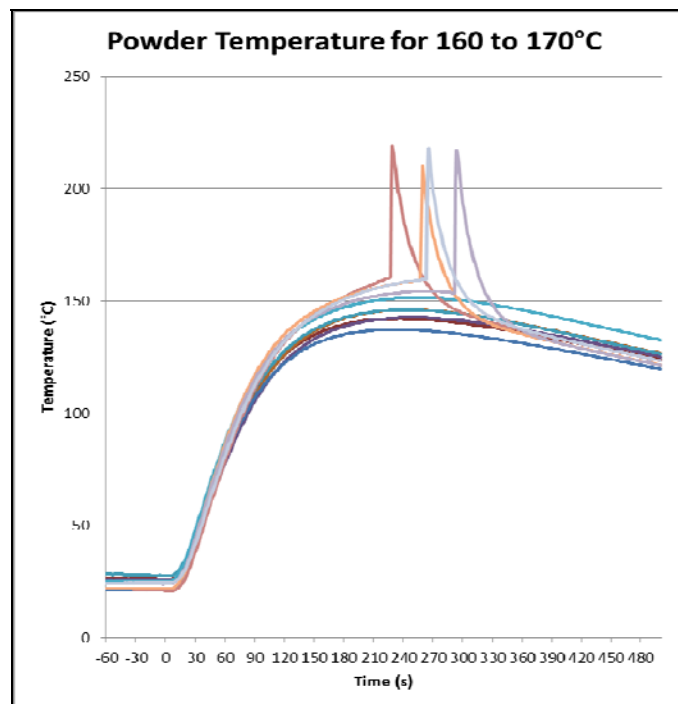


Figure 7. Bulls Eye Propellant Temperature plot (160 to 170°C range).

7 ANALYSIS OF RESULTS

7.1 Pitcher [2] previously noted that for the configurations considered here, the critical wall temperature of the cartridge was between 161°C and 162°C . Below the 161°C limit, the propellant was unlikely to cook-off and above the 163°C cook-off was assured. However, this did depend on the rate of heat rise; in one experiment using the 200W heater elements, the propellant core temperature was 156°C at cook-off (compared with the mean average of $162 - 168^{\circ}\text{C}$ using the 100W heater elements). Pitcher also stated that at a certain heating rate cook-off can still occur even if the Bulls Eye's core propellant temperature is lower than the wall temperature (recorded as between 15 and 20°C temperature difference). These cartridges can also be prone to cook-off within 1800s at a constant cartridge wall temperature of approximately 145°C ; the core propellant started thermal run away at approximately 1600s until the ignition temperature of 145°C .

7.2 For Azaedo's [3] hot barrel cook-off experiments, the region where cook-off was likely to occur was bounded by the upper and lower limits and the No-Go region as shown in Figure 8. There was significant variance in the standard deviations as a percentage of the mean. A likely cause of this was the low population size of 4 or 5 in each temperature range. If the population size was increased through more experiments it is likely the lines will become more consistent across the temperature ranges.

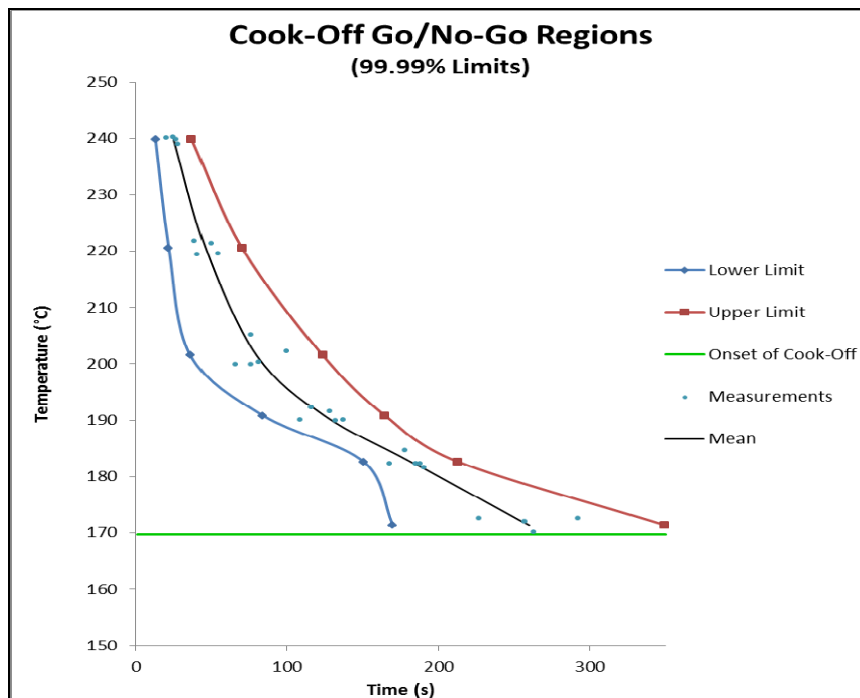


Figure 8. Time/Temperature relationships where cook-off is likely.

7.3 At start temperatures (barrel) around 185°C the barrel and powder cook-off temperatures are equal in Figure 5. Resolving a pair of straight line equations between mean cook-off temperatures and solving simultaneously an intercept can be calculated at a start temperature (barrel) of 186.0°C and cook-off temperature of 163.0°C. At this point cook-off will theoretically occur and the barrel and propellant will be at the same temperature. Above this point it can be observed that the propellant temperature at cook-off drops dramatically, while below it exceeds the barrel temperature by a small margin. At higher temperatures it appeared that the propellant closest to the casing reached the cook-off temperature before the centre significantly heats up. In this regime the heat transfer from the barrel is the dominant heating effect.

8. CONCLUSIONS AND RECOMMENDATIONS

8.1 The experiments conducted in this study identified a number of factors to further the understanding of the cook-off reaction dynamics for a chambered round in a hot gun. While the onset of cook-off occurred at a higher barrel temperature than the cook-off temperature of the propellant it was not significantly higher. The immediate cooling from heat transfer to the cartridge and alignment disk (breech block) was found to briefly reduce the barrel temperature; however it was the rate of cooling of the barrel which dominated the propellant cooling – allowing the cook-off point to be avoided. As higher temperatures were reached, the heat transfer into the cartridge resulted in cook-off occurring at the outer edge before the central temperature had increased sufficiently for cook-off.

8.2 It was found that the cook-off temperature of Bulls Eye propellant with the heat transfer profile of the simulation barrel was between 151.4 and 153.4°C, with the reaction occurring less than 300s after round chambering. A time-temperature profile was developed indicating the conditions in which 99.99% of cook-off reactions are predicted to occur.

8.3 In conducting the experiments a laboratory scale testing apparatus was developed which allowed a cartridge to be inserted into a hot simulation barrel with both the barrel and release being remotely operated. The experiment was found to be consistent and repeatable in its operation.

9 REFERENCES

1. Zukas, J.A. and Walters, W. (2008), “Explosive Effects and Applications” (Shock Wave and High Pressure Phenomena). Springer.

2. Pitcher, P “Assessment of Self Ignition Temperature (Cook-Off) in Gun Barrels” MSc Project thesis, Cranfield University, Shrivenham, SN6 8LA, UK, 2012.
3. LCDR Azaveo, M.S., “Assessment of Self Ignition Temperature (Cook-Off) in Hot Gun Barrels” MSc Project thesis, Cranfield University, Shrivenham, SN6 8LA, UK, 2013.
4. Markides, C.N. (2006) ‘Advanced Autoignition Theory: A Short (But Hopefully Sweet) Introduction’. Available online:
[www2.eng.cam.ac.uk/~cnm24/images/ Autoignition.pdf](http://www2.eng.cam.ac.uk/~cnm24/images/Autoignition.pdf) (Accessed: 04 June 2013).