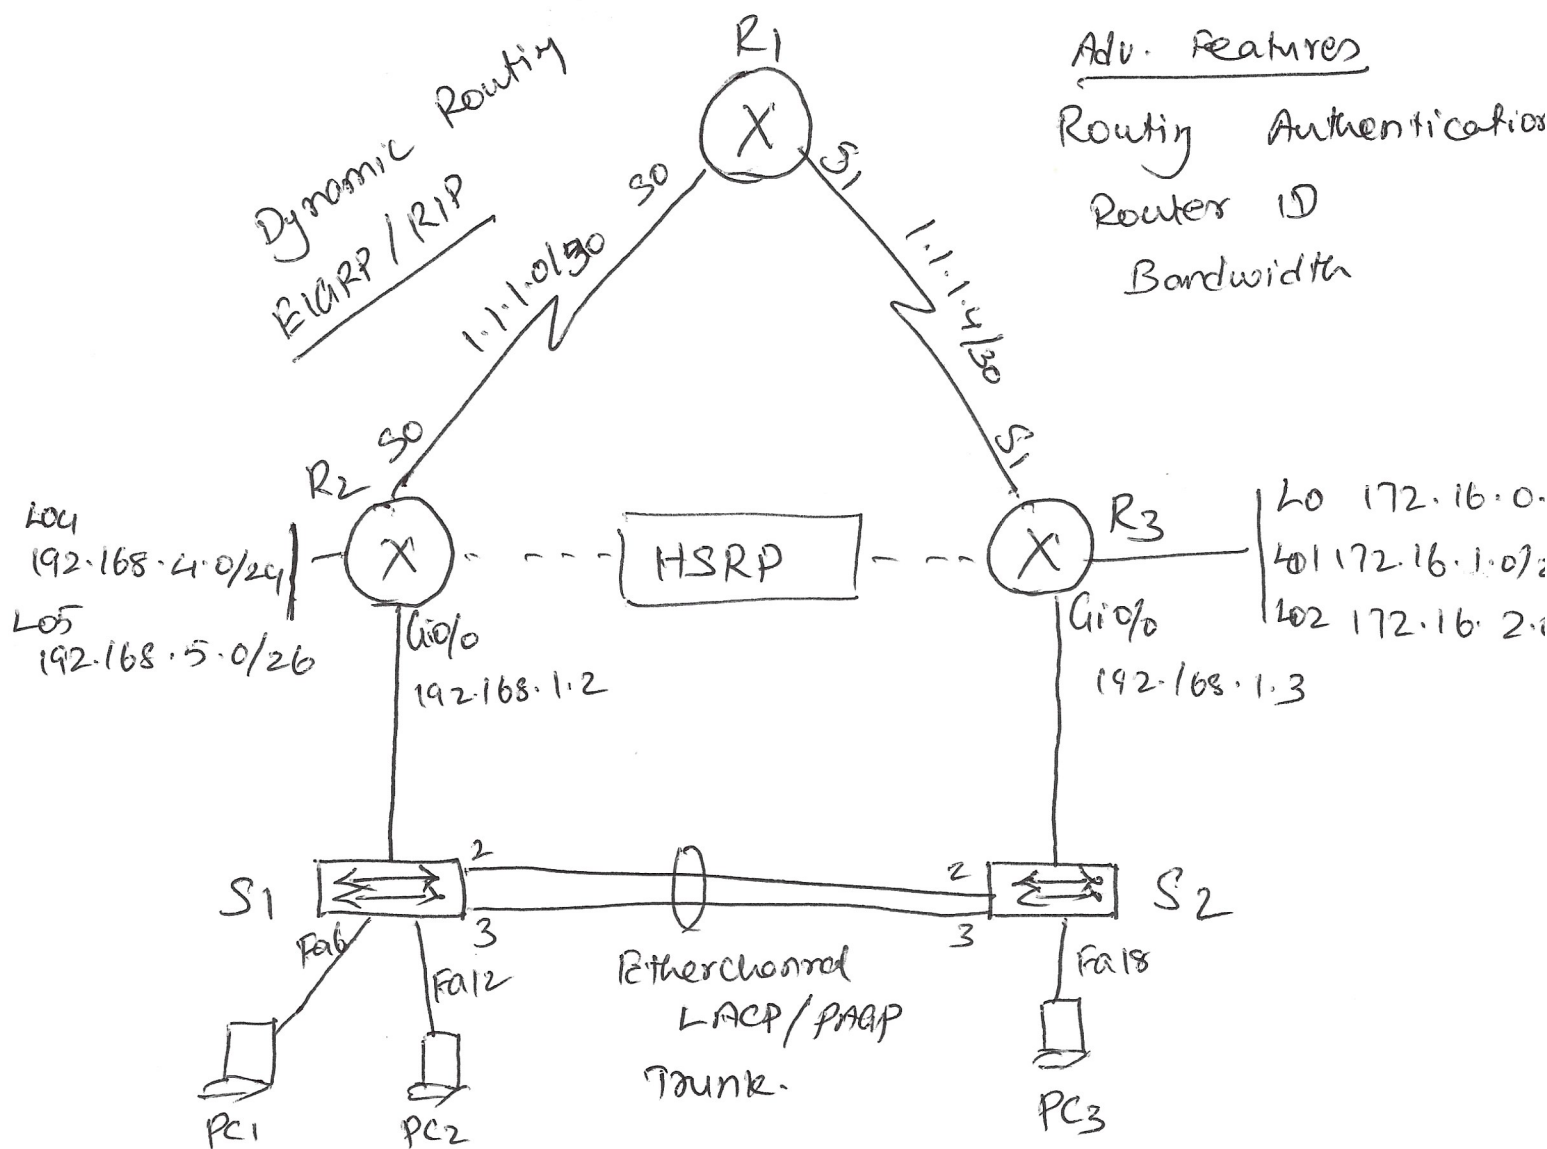


VLANS

- 1 - 192.168.1.0/24
- 2 - 192.168.2.0/24
- 3 - 192.168.3.0/24

S1 - VTP Server
S2 - VTP Client.

HSRP Virtual IP
192.168.1.1/24

Group 1

R2 - Active
R3 - Standby

STP = RPVST+

S1 - root primary
S2 - root secondary

Switch security:

Portfast, BPDU Guard, Root Security.