

Y FFORWM, SA1

ROOF COVERING

&


RAINWATER GOODS

Take off List

NRM 2 References

- 18.1.1.1 - Tiling, battens & underlay
- 18.3.1.3 - Ridge
- 33.5.1.1 - Gutters
- 33.1.1.1 - Down pipes
- 31.3.1.3 - Insulation

NB: I confirm that this is my work which I carried out independantly.

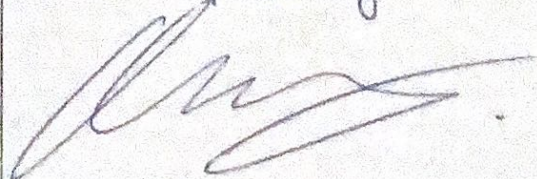

Y EFORWM, SA1

DRWG. 21D01 & 21D02

3/ 12.00
49.00
1176

Kalzip; 65mm Seam, 400 cover width, REF
BS AW 3004 standard natural aluminium,
Stucco embossed finish, 0.9mm thick, ST
clips fixed with stainless steel fasteners;
37 plus 180mm glassfibre insulation
compressed to 165mm (0.25 u-value);
Vapour control layer, clear reinforced
Polyethylene 530 MNs/g all laps sealed;
Liner sheets, Profiled steel, 1000mm cover
width, bright ~~white~~ white polyester paint
finish - 0.7mm thick, fixed with stainless
steel fasteners (NRM 18.1.1 & 31.3.1.3)

2/ 49.00
198

Rainwater gutter, straight half round
100mm aluminium - measured over
filings (NRM 33.5.1.1)

4/ 11.00
44.00

Rainwater downpipes - straight 75mm
diameter aluminium. Pipe length
taken over filings & swan necks
(NRM 33.1.1)